


## Luminaire

Code AQ46318+AQ90XXX  
 Name A.24 SOSP. MODULO DIR.+IND. DIFF. 4000K 2352mm BCOP + A.24 SCHERMO DIFF. OPALINO FLESSIB.

## Measurement

Code FTS2300193  
 Name A.24 SOSP. MODULO DIR.+IND. DIFF. 4000K 2352mm BCOP + A.24 SCHERMO DIFF. OPALINO FLESSIB.

Luminaire Flux	7673 lm	Luminaire Power	87.0 W	Efficacy	88.195 lm/W	Efficiency	100.00%
Source Flux	7673 lm	Maximum value	225.67 cd/klm	Position	C=60.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2352 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	2352 mm	Width	22 mm	Height	0 mm
Horizontal Luminous Area		0.051744 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.012518 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		7673 lm	
LED Flux=14928lm LED Power=80W Eff=51% EfcLed=187lm/W EfcLum=88lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h							
C.I.E.	48 79 96 62 100			D DIN 5040	B31		
F UTE	0.62 E + 0.38 T			B NBN	BZ 4		

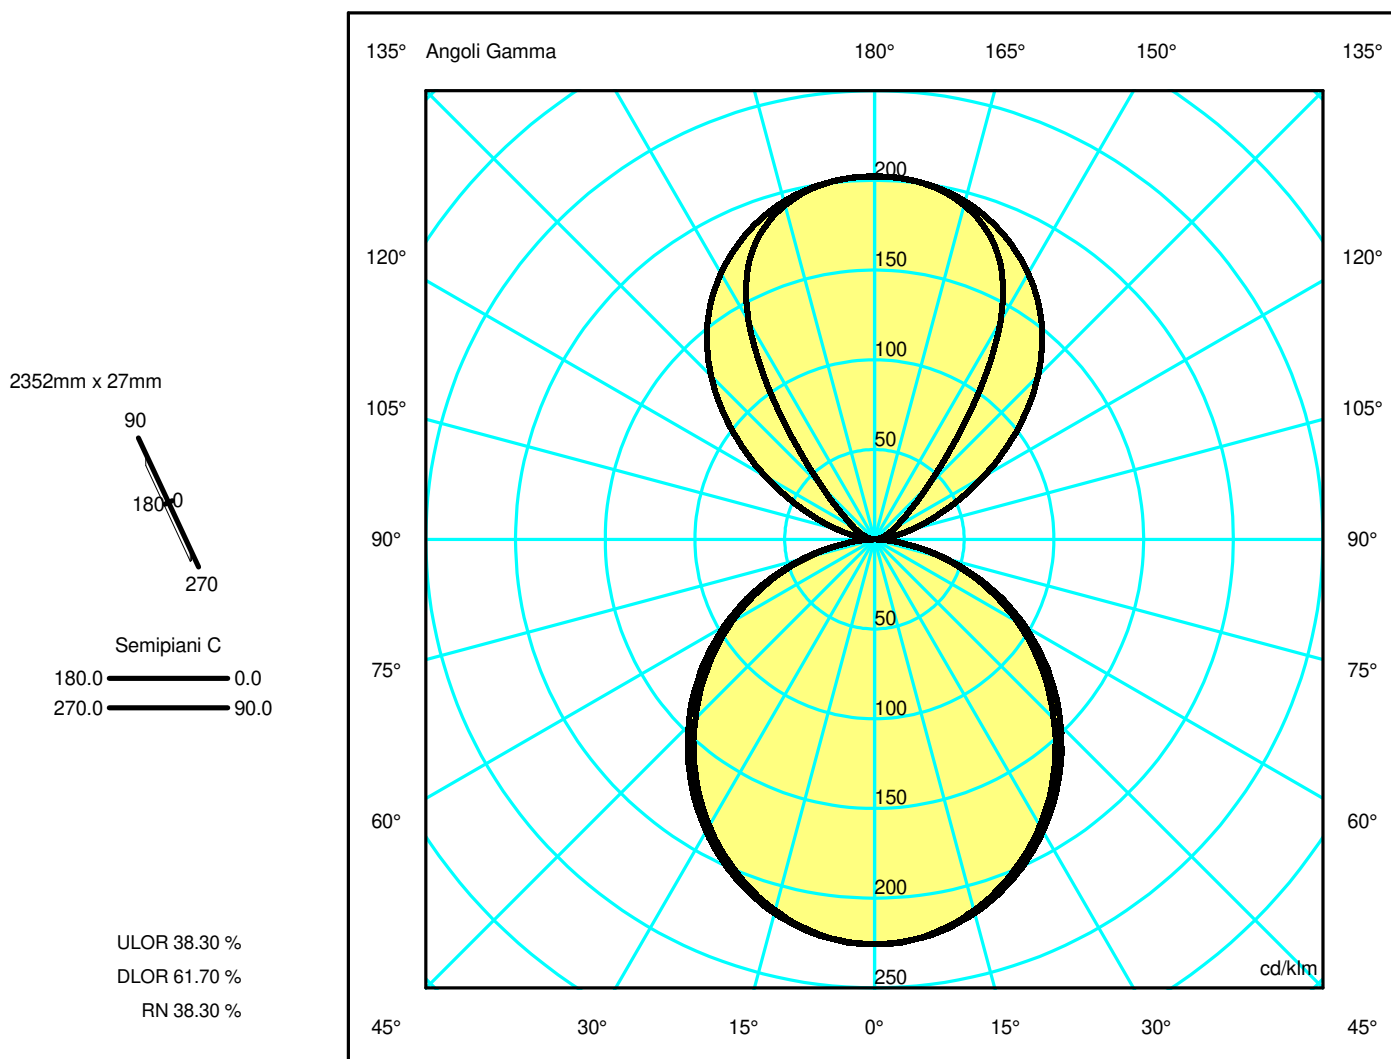

## Luminaire

Code AQ46318+AQ90XXX  
 Name A.24 SOSP. MODULO DIR.+IND. DIFF. 4000K 2352mm BCOP + A.24 SCHERMO DIFF. OPALINO FLESSIB.

## Measurement

Code FTS2300193  
 Name A.24 SOSP. MODULO DIR.+IND. DIFF. 4000K 2352mm BCOP + A.24 SCHERMO DIFF. OPALINO FLESSIB.

Luminaire Flux	7673 lm	Luminaire Power	87.0 W	Efficacy	88.195 lm/W	Efficiency	100.00%
Source Flux	7673 lm	Maximum value	225.67 cd/klm	Position	C=60.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2352 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	2352 mm	Width	22 mm	Height	0 mm
Horizontal Luminous Area		0.051744 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.012518 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		7673 lm	


LED Flux=14928lm LED Power=80W Eff=51% EfcLed=187lm/W EfcLum=88lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(17k)=102000h

C.I.E.	48 79 96 62 100	D DIN 5040	B31
F UTE	0.62 E + 0.38 T	B NBN	BZ 4

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.37	2.74	4.10	5.47	6.84	OC	1.45	2.89	4.34	5.78	7.23
OB	1.37	2.74	4.10	5.47	6.84	OD	1.45	2.89	4.34	5.78	7.23

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1731.51	1719.96	1642.17	1501.77	1313.94	1082.57	835.88	571.06	299.23	66.38
OB	1731.51	1719.96	1642.17	1501.77	1313.94	1082.57	835.88	571.06	299.23	66.38
OC	1731.51	1722.02	1653.49	1525.20	1345.09	1123.60	873.65	604.15	313.10	63.37
OD	1731.51	1722.02	1653.49	1525.20	1345.09	1123.60	873.65	604.15	313.10	63.37

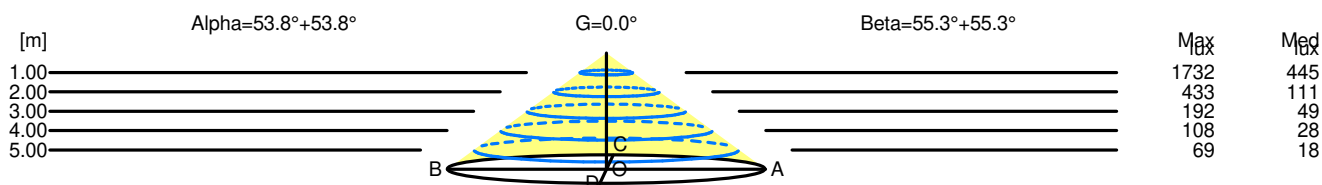

H[m]	D[m]	Max lux	Med lux	Alpha=53.8°+53.8°	G=0.0
1.00	2.74	1732	445		
2.00	5.47	433	111		
3.00	8.21	192	49		
4.00	10.94	108	28		
5.00	13.68	69	18		

H[m]	D[m]	Max lux	Med lux	Beta=55.3°+55.3°	G=0.0
1.00	2.89	1732	445		
2.00	5.78	433	111		
3.00	8.68	192	49		
4.00	11.57	108	28		
5.00	14.46	69	18		