

Luminaire

Code AQ47001
Name A.24 SOSP. MODULO DIR.+IND. SHARP 3000K FL 1176mm WHT

Measurem.

Code FTS1802322-B
Name A.24 SOSP. MODULO DIR.+IND. SHARP 3000K FL 1176mm WHT


| | | | | | | | |
|----------------------------|---------|-----------------|----------------|-----------------------------|----------------|--------------------|--------------------|
| Luminaire Flux | 3424 lm | Luminaire Power | 36.0 W | Efficacy | 95.111 lm/W | Efficiency | 100.00% |
| Source Flux | 3424 lm | Maximum value | 1338.32 cd/klm | Position | C=20.00 G=1.00 | CG | Double Symmetrical |
| Rectangular Luminaire | | Length | 1176 mm | Width | 27 mm | Height | 55 mm |
| Rectangular Luminous Area | | Length | 258 mm | Width | 12 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.003096 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000749 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 20-09-2023 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 3424 lm | |

LED Flux=4488lm LED Power=33W Eff=76% EfcLed=135lm/W EfcLum=95lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=102000h

C.I.E. 98 100 100 48 100
F UTE --

D DIN 5040
B NBN
C62
BZ 1

1176mm x 27mm




Sempiani C

180.0 — 0.0
270.0 — 90.0

ULOR 52.45 %

DLOR 47.55 %

RN 52.45 %

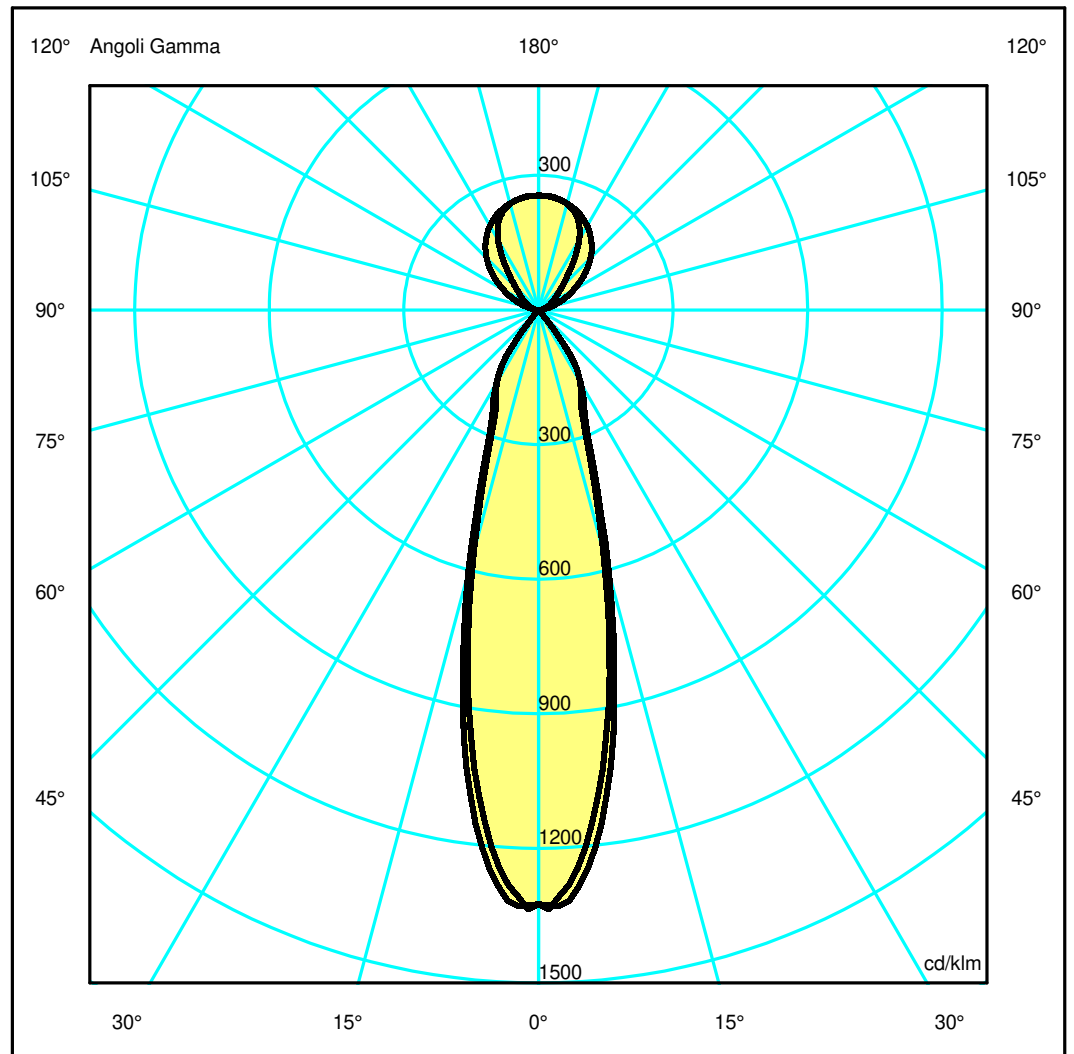

Luminaire

Code AQ47001
Name A.24 SOSP. MODULO DIR.+IND. SHARP 3000K FL 1176mm WHT

Measurerm.


Code FTS1802322-B
Name A.24 SOSP. MODULO DIR.+IND. SHARP 3000K FL 1176mm WHT

| | | | | | | | |
|---|-------------------|-----------------|----------------|-----------------------------|----------------|--------------------|--------------------|
| Luminaire Flux | 3424 lm | Luminaire Power | 36.0 W | Efficacy | 95.111 lm/W | Efficiency | 100.00% |
| Source Flux | 3424 lm | Maximum value | 1338.32 cd/klm | Position | C=20.00 G=1.00 | CG | Double Symmetrical |
| Rectangular Luminaire | | Length | 1176 mm | Width | 27 mm | Height | 55 mm |
| Rectangular Luminous Area | | Length | 258 mm | Width | 12 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.003096 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000749 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 20-09-2023 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 3424 lm | |
| LED Flux=4488lm LED Power=33W Eff=76% EfcLed=135lm/W EfcLum=95lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=102000h | | | | | | | |
| C.I.E. | 98 100 100 48 100 | | | D DIN 5040 | | C62 | |
| F UTE | -- | | | B NBN | | BZ 1 | |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 0.24 | 0.47 | 0.71 | 0.95 | 1.18 | OC | 0.25 | 0.50 | 0.75 | 1.00 | 1.25 |
| OB | 0.24 | 0.47 | 0.71 | 0.95 | 1.18 | OD | 0.25 | 0.50 | 0.75 | 1.00 | 1.25 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|---------------------------------|---------|---------|--------|--------|-------|------|------|------|------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 4533.06 | 4114.92 | 1906.32 | 762.96 | 432.71 | 10.84 | 3.76 | 1.08 | 0.00 | 0.00 |
| OB | 4533.06 | 4114.92 | 1906.32 | 762.96 | 432.71 | 10.84 | 3.76 | 1.08 | 0.00 | 0.00 |
| OC | 4533.06 | 4283.49 | 2079.08 | 824.86 | 427.44 | 15.82 | 4.35 | 1.03 | 0.00 | 0.00 |
| OD | 4533.06 | 4283.49 | 2079.08 | 824.86 | 427.44 | 15.82 | 4.35 | 1.03 | 0.00 | 0.00 |

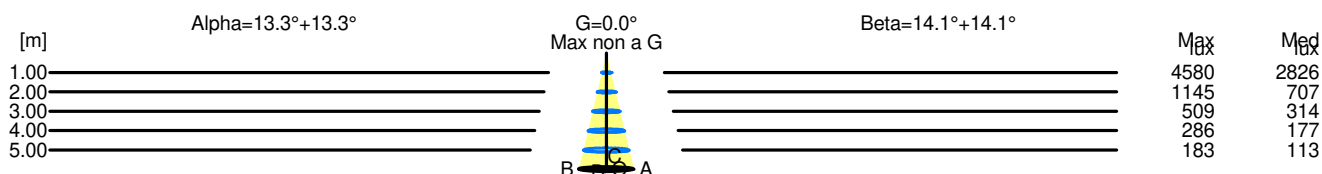

| H[m] | D[m] | Max lux | Med lux | Alpha=13.3°+13.3° | G=0.0 Max non a G |
|------|------|---------|---------|-------------------|----------------------|
| 1.00 | 0.47 | 4580 | 2826 | | |
| 2.00 | 0.95 | 1145 | 707 | | |
| 3.00 | 1.42 | 509 | 314 | | |
| 4.00 | 1.89 | 286 | 177 | | |
| 5.00 | 2.37 | 183 | 113 | | |

| H[m] | D[m] | Max lux | Med lux | Beta=14.1°+14.1° | G=0.0 Max non a G |
|------|------|---------|---------|------------------|----------------------|
| 1.00 | 0.50 | 4580 | 2826 | | |
| 2.00 | 1.00 | 1145 | 707 | | |
| 3.00 | 1.50 | 509 | 314 | | |
| 4.00 | 2.01 | 286 | 177 | | |
| 5.00 | 2.51 | 183 | 113 | | |