


## Luminaire

Code AQ47015  
Name A.24 SOSP.MOD.D+IN SHARP3000K FL 1176 BSV

## Measurement

Code FTS1802322-B  
Name A.24 SOSP.MOD.D+IN SHARP3000K FL 1176 BSV

Luminaire Flux	3424 lm	Luminaire Power	36.0 W	Efficacy	95.111 lm/W	Efficiency	100.00%
Source Flux	3424 lm	Maximum value	1338.32 cd/klm	Position	C=20.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1176 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	258 mm	Width	12 mm	Height	0 mm
Horizontal Luminous Area		0.003096 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.000749 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3424 lm	
LED Flux=4488lm LED Power=33W Eff=76% EfcLed=135lm/W EfcLum=95lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=102000h							
C.I.E.	98 100 100 48 100			D DIN 5040	C62		
F UTE	--			B NBN	BZ 1		

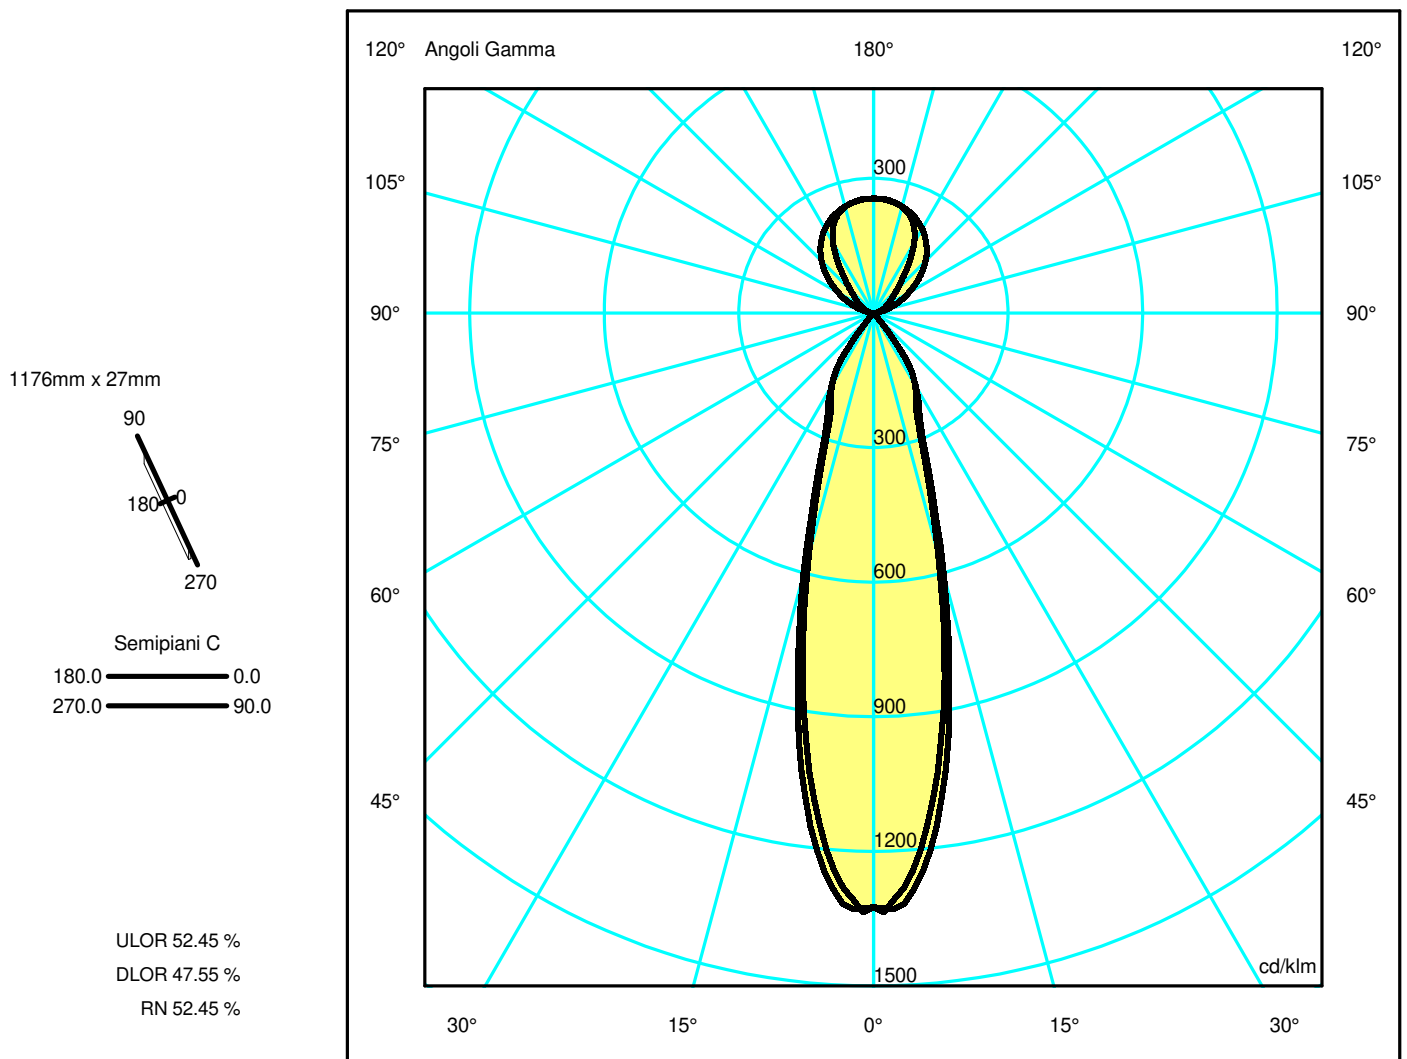

## Luminaire

Code AQ47015  
Name A.24 SOSP.MOD.D+IN SHARP3000K FL 1176 BSV

## Measurerm.


Code FTS1802322-B  
Name A.24 SOSP.MOD.D+IN SHARP3000K FL 1176 BSV

Luminaire Flux	3424 lm	Luminaire Power	36.0 W	Efficacy	95.111 lm/W	Efficiency	100.00%
Source Flux	3424 lm	Maximum value	1338.32 cd/klm	Position	C=20.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1176 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	258 mm	Width	12 mm	Height	0 mm
Horizontal Luminous Area		0.003096 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000749 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3424 lm	
LED Flux=4488lm LED Power=33W Eff=76% EfcLed=135lm/W EfcLum=95lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=102000h							
C.I.E.	98 100 100 48 100			D DIN 5040		C62	
F UTE	--			B NBN		BZ 1	

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.24	0.47	0.71	0.95	1.18	OC	0.25	0.50	0.75	1.00	1.25
OB	0.24	0.47	0.71	0.95	1.18	OD	0.25	0.50	0.75	1.00	1.25

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	4533.06	4114.92	1906.32	762.96	432.71	10.84	3.76	1.08	0.00	0.00
OB	4533.06	4114.92	1906.32	762.96	432.71	10.84	3.76	1.08	0.00	0.00
OC	4533.06	4283.49	2079.08	824.86	427.44	15.82	4.35	1.03	0.00	0.00
OD	4533.06	4283.49	2079.08	824.86	427.44	15.82	4.35	1.03	0.00	0.00

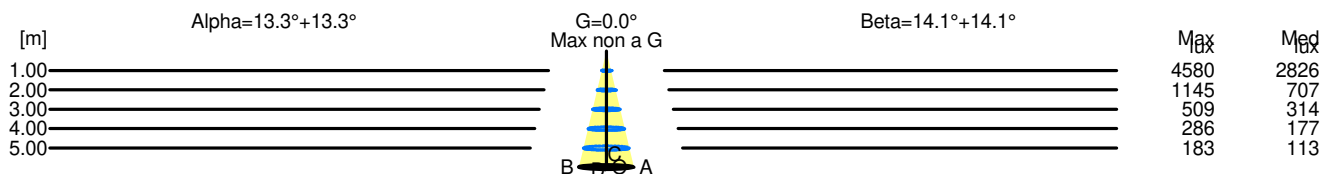

H[m]	D[m]	Max lux	Med lux	Alpha=13.3°+13.3°	G=0.0° Max non a G
1.00	0.47	4580	2826		
2.00	0.95	1145	707		
3.00	1.42	509	314		
4.00	1.89	286	177		
5.00	2.37	183	113		

H[m]	D[m]	Max lux	Med lux	Beta=14.1°+14.1°	G=0.0° Max non a G
1.00	0.50	4580	2826		
2.00	1.00	1145	707		
3.00	1.50	509	314		
4.00	2.01	286	177		
5.00	2.51	183	113		