


## Luminaire

Code AQ47220  
Name A.24 SOSP.MOD.D+IN SHARP3000K FL 2352 BBRZ

## Measurement

Code FTS2300243  
Name A.24 SOSP.MOD.D+IN SHARP3000K FL 2352 BBRZ

Luminaire Flux	6195 lm	Luminaire Power	74.0 W	Efficacy	83.716 lm/W	Efficiency	100.00%
Source Flux	6195 lm	Maximum value	1479.26 cd/klm	Position	C=20.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2352 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	516 mm	Width	12 mm	Height	0 mm
Horizontal Luminous Area		0.006192 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.001498 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		6195 lm	
LED Flux=8976lm LED Power=65W Eff=69% EfcLed=139lm/W EfcLum=84lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=102000h							
C.I.E.	98 100 100 53 100			D DIN 5040		C61	
F UTE	--			B NBN		BZ 1	

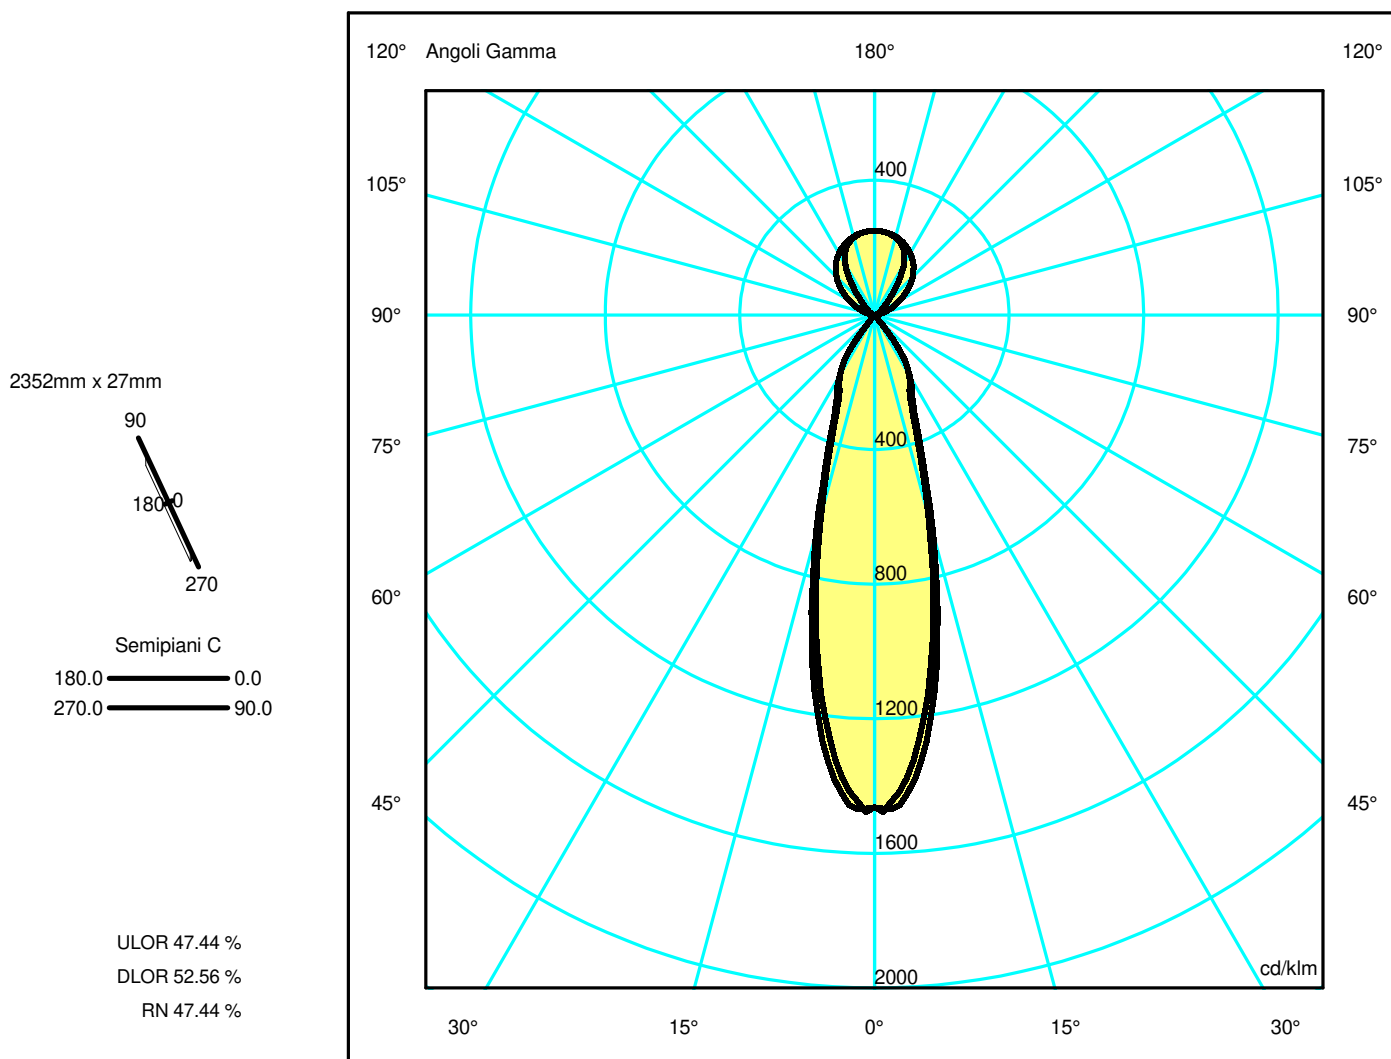

## Luminaire

Code AQ47220  
Name A.24 SOSP.MOD.D+IN SHARP3000K FL 2352 BBRZ

## Measurem.


Code FTS2300243  
Name A.24 SOSP.MOD.D+IN SHARP3000K FL 2352 BBRZ

Luminaire Flux	6195 lm	Luminaire Power	74.0 W	Efficacy	83.716 lm/W	Efficiency	100.00%
Source Flux	6195 lm	Maximum value	1479.26 cd/klm	Position	C=20.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2352 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	516 mm	Width	12 mm	Height	0 mm
Horizontal Luminous Area		0.006192 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001498 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		6195 lm	
LED Flux=8976lm LED Power=65W Eff=69% EfcLed=139lm/W EfcLum=84lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=102000h							
C.I.E.	98 100 100 53 100			D DIN 5040		C61	
F UTE	--			B NBN		BZ 1	

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.24	0.47	0.71	0.95	1.18	OC	0.25	0.50	0.75	1.00	1.25
OB	0.24	0.47	0.71	0.95	1.18	OD	0.25	0.50	0.75	1.00	1.25

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	9065.29	8229.09	3812.29	1525.79	865.34	21.69	7.52	2.15	0.00	0.00
OB	9065.29	8229.09	3812.29	1525.79	865.34	21.69	7.52	2.15	0.00	0.00
OC	9065.29	8566.19	4157.77	1649.58	854.80	31.63	8.69	2.06	0.00	0.00
OD	9065.29	8566.19	4157.77	1649.58	854.80	31.63	8.69	2.06	0.00	0.00

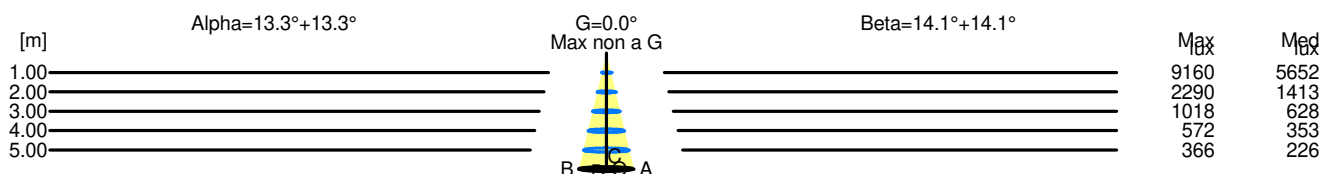

H[m]	D[m]	Max lux	Med lux	Alpha=13.3°+13.3°	G=0.0° Max non a G
1.00	0.47	9160	5652		
2.00	0.95	2290	1413		
3.00	1.42	1018	628		
4.00	1.89	572	353		
5.00	2.37	366	226		

H[m]	D[m]	Max lux	Med lux	Beta=14.1°+14.1°	G=0.0° Max non a G
1.00	0.50	9160	5652		
2.00	1.00	2290	1413		
3.00	1.50	1018	628		
4.00	2.01	572	353		
5.00	2.51	366	226		