

Luminaire

Code AQ48201
Name A.24 SOSP. DIR+IND SHARP 2700K FL 1176WHT

Measurement

Code FTS1802317-C
Name A.24 SOSP. DIR+IND SHARP 2700K FL 1176WHT

Luminaire Flux	3310 lm	Luminaire Power	36.0 W	Efficacy	91.944 lm/W	Efficiency	100.00%
Source Flux	3310 lm	Maximum value	1374.70 cd/klm	Position	C=20.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1176 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	258 mm	Width	12 mm	Height	0 mm
Horizontal Luminous Area		0.003096 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.000749 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3310 lm	


LED Flux=4332lm LED Power=33W Eff=76% EfcLed=130lm/W EfcLum=92lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=102000h

C.I.E. 98 100 100 49 100
F UTE --

D DIN 5040
B NBN

C62
BZ 1


1176mm x 27mm



Semipiani C

180.0 — 0.0
270.0 — 90.0

ULOR 51.15 %
DLOR 48.85 %
RN 51.15 %

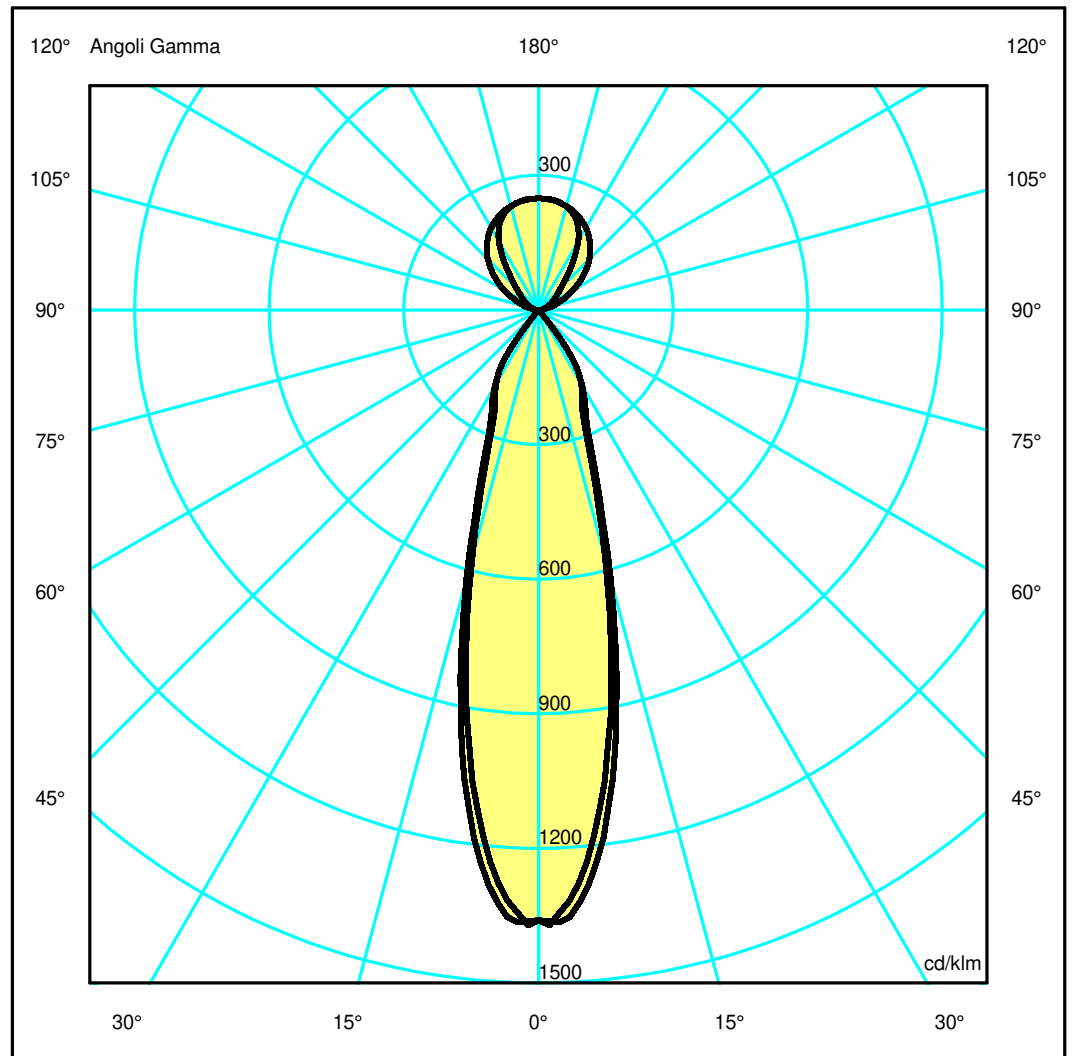

Luminaire

Code AQ48201
Name A.24 SOSP. DIR+IND SHARP 2700K FL 1176WHT

Measurerm.


Code FTS1802317-C
Name A.24 SOSP. DIR+IND SHARP 2700K FL 1176WHT

Luminaire Flux	3310 lm	Luminaire Power	36.0 W	Efficacy	91.944 lm/W	Efficiency	100.00%
Source Flux	3310 lm	Maximum value	1374.70 cd/klm	Position	C=20.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1176 mm	Width	27 mm	Height	55 mm
Rectangular Luminous Area		Length	258 mm	Width	12 mm	Height	0 mm
Horizontal Luminous Area		0.003096 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000749 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3310 lm	
LED Flux=4332lm LED Power=33W Eff=76% EfcLed=130lm/W EfcLum=92lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=102000h							
C.I.E.	98 100 100 49 100			D DIN 5040		C62	
F UTE	--			B NBN		BZ 1	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.24	0.47	0.71	0.95	1.18	OC	0.25	0.50	0.75	1.00	1.25
OB	0.24	0.47	0.71	0.95	1.18	OD	0.25	0.50	0.75	1.00	1.25

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4501.23	4086.02	1892.93	757.61	429.67	10.77	3.73	1.07	0.00	0.00
OB	4501.23	4086.02	1892.93	757.61	429.67	10.77	3.73	1.07	0.00	0.00
OC	4501.23	4253.41	2064.48	819.07	424.44	15.71	4.32	1.02	0.00	0.00
OD	4501.23	4253.41	2064.48	819.07	424.44	15.71	4.32	1.02	0.00	0.00

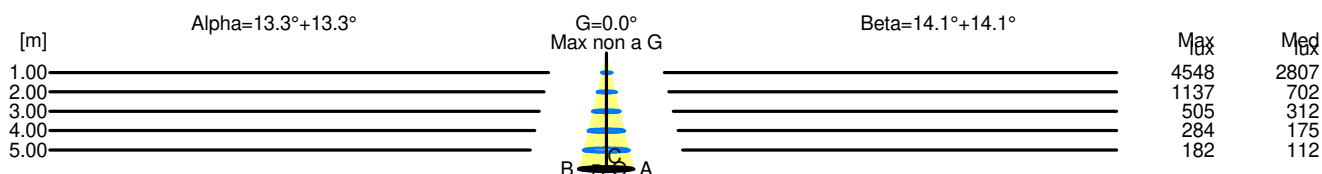

H[m]	D[m]	Max lux	Med lux	Alpha=13.3°+13.3°	G=0.0 Max non a G
1.00	0.47	4548	2807		
2.00	0.95	1137	702		
3.00	1.42	505	312		
4.00	1.89	284	175		
5.00	2.37	182	112		

H[m]	D[m]	Max lux	Med lux	Beta=14.1°+14.1°	G=0.0 Max non a G
1.00	0.50	4548	2807		
2.00	1.00	1137	702		
3.00	1.50	505	312		
4.00	2.01	284	175		
5.00	2.51	182	112		