

## Luminaire


Code AQ55304APP  
 Name A.24 INC SA360 1500 SHRP FL4000K BK APP\*  
**Measurement.**  
 Code FTS1901639  
 Name A.24 INC SA360 1500 SHRP FL4000K BK APP\*

Luminaire Flux	6969 lm	Luminaire Power	83.0 W	Efficacy	83.970 lm/W	Efficiency	100.00%
Source Flux	6969 lm	Maximum value	2814.46 cd/klm	Position	C=20.00 G=1.00	CG	Double Symmetrical
Round Luminaire		Diam.	1550 mm	Height	54 mm		
Round Luminous Area		Diam.	124 mm	Height	0 mm		
Horizontal Luminous Area			0.012076 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.002922 m2
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-11-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		6969 lm	

LED Flux=8562lm LED Power=76W Eff=81% EfcLed=113lm/W EfcLum=84lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 98 100 100 100 100  
 F UTE --

D DIN 5040  
 B NBN  
 A60  
 BZ 1

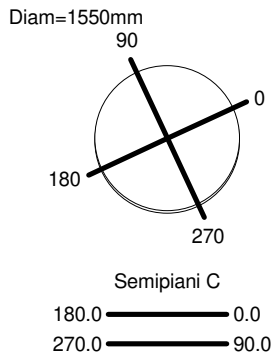

ULOR 0.00 %  
 DLOR100.00 %  
 RN 0.00 %

