

Luminaire

Code AQ64301
Name A.24 PLF SA360 1122 SHARP FL4000K WH

Measurement

Code FTS1901633
Name A.24 PLF SA360 1122 SHARP FL4000K WH


| | | | | | | | |
|----------------------------|---------|-----------------|----------------|-----------------------------|----------------|--------------------|--------------------|
| Luminaire Flux | 3485 lm | Luminaire Power | 42.0 W | Efficacy | 82.970 lm/W | Efficiency | 100.00% |
| Source Flux | 3485 lm | Maximum value | 2814.46 cd/klm | Position | C=20.00 G=1.00 | CG | Double Symmetrical |
| Round Luminaire | | Diam. | 1122 mm | Height | 54 mm | | |
| Round Luminous Area | | Diam. | 88 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | | 0.006082 m2 | Emitting area on Plane 180° | | | 0.000000 m2 |
| Emitting area on Plane 0° | | | 0.000000 m2 | Emitting area on Plane 270° | | | 0.000000 m2 |
| Emitting area on Plane 90° | | | 0.000000 m2 | Glare area at 76° | | | 0.001471 m2 |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 21-11-2018 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 3485 lm | |

LED Flux=4281lm LED Power=38W Eff=81% EfcLed=113lm/W EfcLum=83lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h

C.I.E. 98 100 100 100 100
F UTE --

D DIN 5040
B NBN

A60
BZ 1

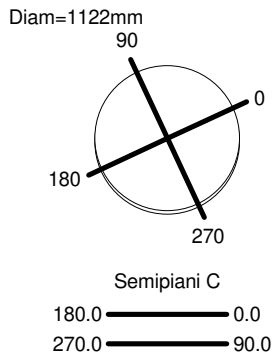

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

