

Luminaire

Code AQ65104APP
Name A.24 PLAF SA360 1500 DIFF 4000K BK APP*

Measurement

Code FTS2000901
Name A.24 PLAF SA360 1500 DIFF 4000K BK APP*


| | | | | | | | |
|----------------------------|----------|-----------------|---------------|-----------------------------|----------------|--------------------|--------------------|
| Luminaire Flux | 11429 lm | Luminaire Power | 132.0 W | Efficacy | 86.583 lm/W | Efficiency | 100.00% |
| Source Flux | 11429 lm | Maximum value | 350.39 cd/klm | Position | C=85.00 G=1.00 | CG | Double Symmetrical |
| Round Luminaire | | Diam. | 1550 mm | Height | 50 mm | | |
| Round Luminous Area | | Diam. | 352 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | | 0.097314 m2 | Emitting area on Plane 180° | | | 0.000000 m2 |
| Emitting area on Plane 0° | | | 0.000000 m2 | Emitting area on Plane 270° | | | 0.000000 m2 |
| Emitting area on Plane 90° | | | 0.000000 m2 | Glare area at 76° | | | 0.023542 m2 |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 02-02-2018 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 11429 lm | |

LED Flux=18950.4lm LED Power=119W Eff=60% EfcLed=159lm/W EfcLum=87lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h


C.I.E. 47 79 96 100 100
F UTE 1.00 E

D DIN 5040
B NBN

A30
BZ 5 / 1.5 / BZ 4

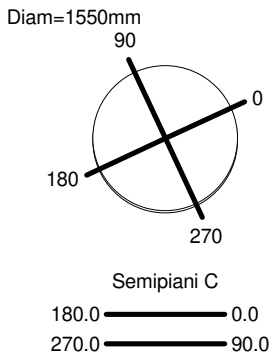

ULOR 0.02 %
DLOR 99.98 %
RN 0.02 %

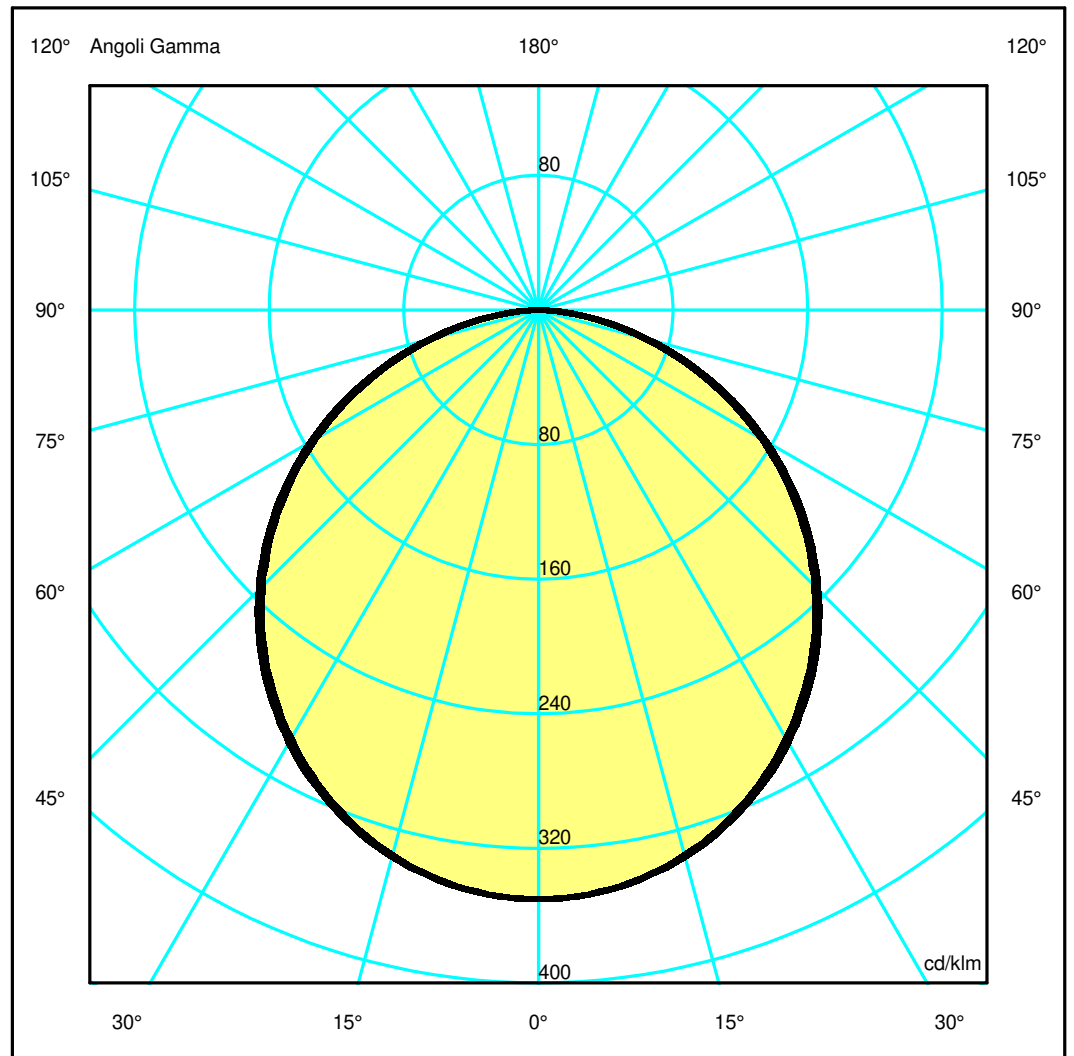

Luminaire

Code AQ65104APP
Name A.24 PLAF SA360 1500 DIFF 4000K BK APP*

Measurment.


Code FTS2000901
Name A.24 PLAF SA360 1500 DIFF 4000K BK APP*

| | | | | | | | |
|--|------------------|-----------------|---------------|-----------------------------|-------------------|--------------------|--------------------|
| Luminaire Flux | 11429 lm | Luminaire Power | 132.0 W | Efficacy | 86.583 lm/W | Efficiency | 100.00% |
| Source Flux | 11429 lm | Maximum value | 350.39 cd/klm | Position | C=85.00 G=1.00 | CG | Double Symmetrical |
| Round Luminaire | | Diam. | 1550 mm | Height | 50 mm | | |
| Round Luminous Area | | Diam. | 352 mm | Height | 0 mm | | |
| Horizontal Luminous Area | 0.097314 m2 | | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | 0.000000 m2 | | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | 0.000000 m2 | | | Glare area at 76° | | 0.023542 m2 | |
| Coordinate system | CG | | | Symmetry Type | | Double Symmetrical | |
| Date | 02-02-2018 | | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | 0.00 | | | Measurement Flux | | 11429 lm | |
| LED Flux=18950.4lm LED Power=119W Eff=60% EfcLed=159lm/W EfcLum=87lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h | | | | | | | |
| C.I.E. | 47 79 96 100 100 | | | D DIN 5040 | A30 | | |
| F UTE | 1.00 E | | | B NBN | BZ 5 / 1.5 / BZ 4 | | |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 1.49 | 2.97 | 4.46 | 5.94 | 7.43 | OC | 1.52 | 3.04 | 4.57 | 6.09 | 7.61 |
| OB | 1.49 | 2.97 | 4.46 | 5.94 | 7.43 | OD | 1.52 | 3.04 | 4.57 | 6.09 | 7.61 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|---------------------------------|---------|---------|---------|---------|---------|---------|---------|--------|--------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 4002.30 | 3982.84 | 3830.64 | 3550.05 | 3146.79 | 2643.39 | 2066.70 | 1418.87 | 736.58 | 164.84 |
| OB | 4002.30 | 3982.84 | 3830.64 | 3550.05 | 3146.79 | 2643.39 | 2066.70 | 1418.87 | 736.58 | 164.84 |
| OC | 4002.30 | 3985.38 | 3847.19 | 3573.10 | 3185.41 | 2686.88 | 2105.77 | 1460.03 | 776.75 | 202.99 |
| OD | 4002.30 | 3985.38 | 3847.19 | 3573.10 | 3185.41 | 2686.88 | 2105.77 | 1460.03 | 776.75 | 202.99 |

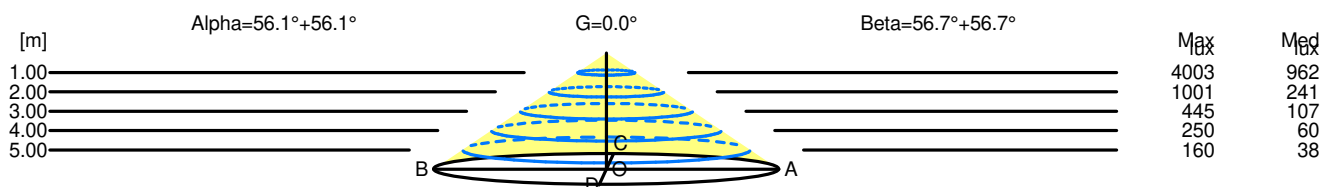

| H[m] | D[m] | Max lux | Med lux | Alpha=56.1°+56.1° | G=0.0 |
|------|-------|---------|---------|-------------------|-------|
| 1.00 | 2.97 | 4003 | 962 | | |
| 2.00 | 5.94 | 1001 | 241 | | |
| 3.00 | 8.91 | 445 | 107 | | |
| 4.00 | 11.89 | 250 | 60 | | |
| 5.00 | 14.86 | 160 | 38 | | |

| H[m] | D[m] | Max lux | Med lux | Beta=56.7°+56.7° | G=0.0 |
|------|-------|---------|---------|------------------|-------|
| 1.00 | 3.04 | 4003 | 962 | | |
| 2.00 | 6.09 | 1001 | 241 | | |
| 3.00 | 9.13 | 445 | 107 | | |
| 4.00 | 12.18 | 250 | 60 | | |
| 5.00 | 15.22 | 160 | 38 | | |