


Luminaire

Code AQ74318APP
 Name A.24 SOSP 360 1122 SHRP FL4000 BCP APP*

Measurement

Code FTS1901633
 Name A.24 SOSP 360 1122 SHRP FL4000 BCP APP*

Luminaire Flux	3485 lm	Luminaire Power	42.0 W	Efficacy	82.970 lm/W	Efficiency	100.00%
Source Flux	3485 lm	Maximum value	2814.46 cd/klm	Position	C=20.00 G=1.00	CG	Double Symmetrical
Round Luminaire		Diam.	1122 mm	Height	54 mm		
Round Luminous Area		Diam.	88 mm	Height	0 mm		
Horizontal Luminous Area			0.006082 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.001471 m2
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-11-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3485 lm	
LED Flux=4281lm LED Power=38W Eff=81% EfcLed=113lm/W EfcLum=83lm/W CCT=4000K Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	98	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

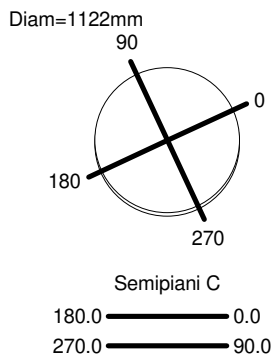

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

