


Luminaire

Code AT06204+AT10200
 Name A.39 MODULO RCS TRIM DIFF L=2368mm 840 DIM NRO

Measurement

Code FTS1801025
 Name A.39 MODULO RCS TRIM DIFF L=2368mm 840 DIM NRO

Luminaire Flux	4197.79 lm	Luminaire Power	63.00 W	Efficacy	66.63 lm/W	Efficiency	100.00%
Sources Flux	4197.79 lm	Maximum value	394.91 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire	Length	2368 mm	Width	55 mm	Height	60 mm	
Rectangular Luminous Area	Length	2360 mm	Width	40 mm	Height	0 mm	
Horizontal Luminous Area	0.094400 m2		Emitting area on Plane 180°	0.000000 m2			
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2			
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.022837 m2			
Coordinate system	CG		Symmetry Type	Double Symmetrical			
Date	22-05-2018		Maximum Gamma Angle	180			
Measurement Distance	0.00		Measurement Flux	4197.79 lm			
LED Flux=9676,8lm LED Power=59W Eff=43% EfcLed=164lm/W EfcLum=67lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h							
C.I.E.	50 81 96 100 100	D DIN 5040	A30				
F UTE	1.00 E	B NBN	BZ 4				

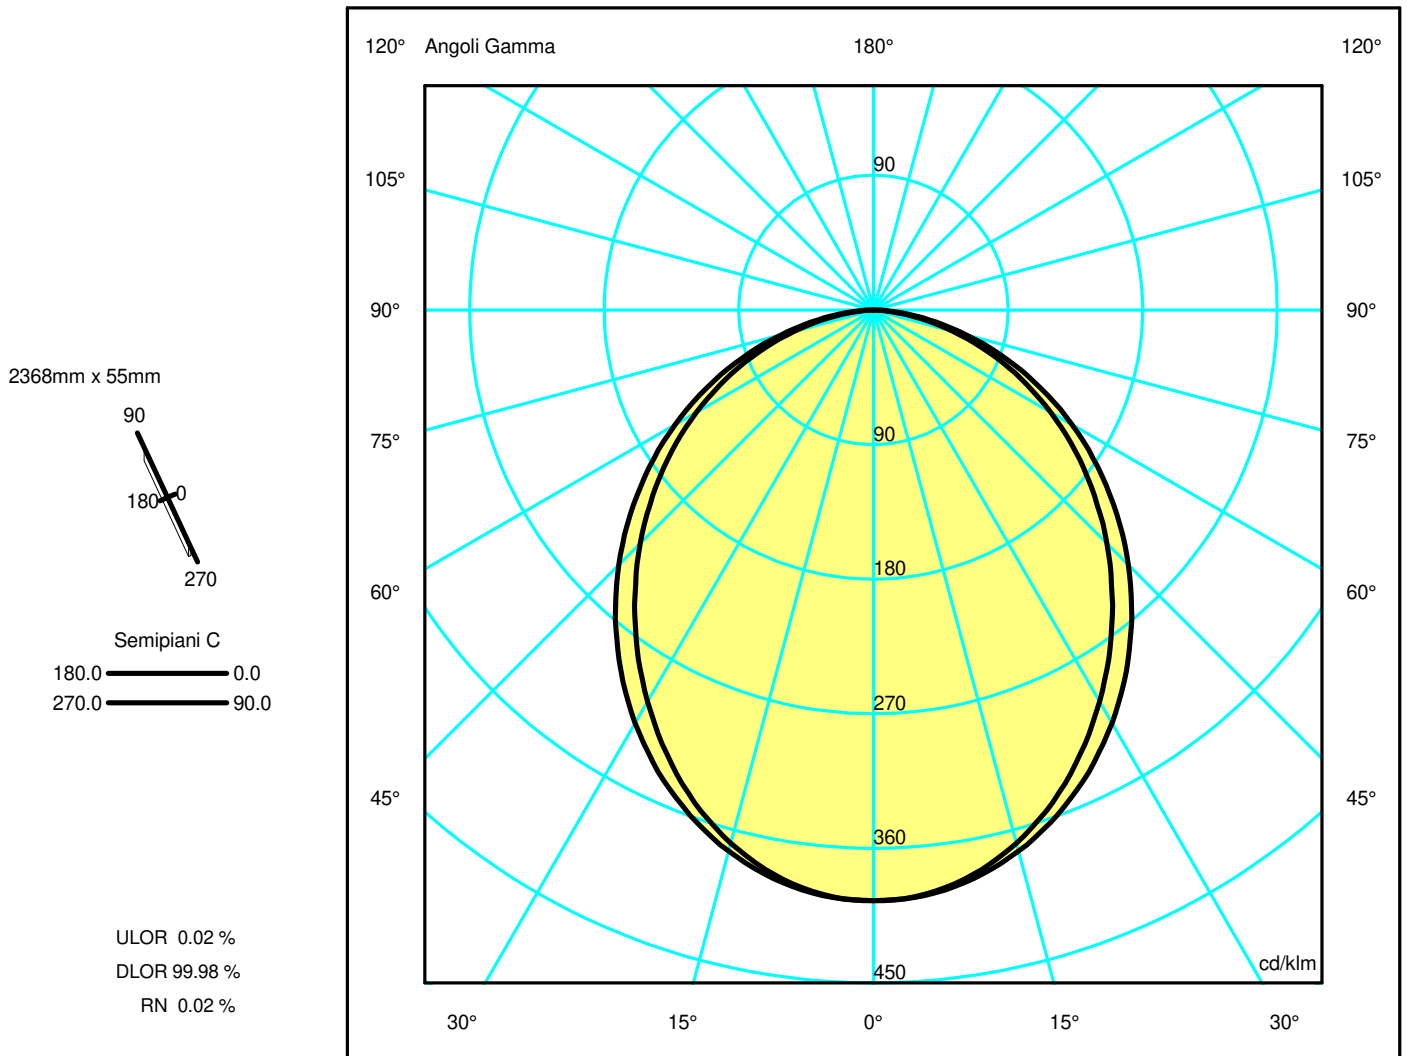

Luminaire

Code AT06204+AT10200
Name A.39 MODULO RCS TRIM DIFF L=2368mm 840 DIM NRO

Measurment.

Code FTS1801025
Name A.39 MODULO RCS TRIM DIFF L=2368mm 840 DIM NRO

Luminaire Flux	4197.79 lm	Luminaire Power	63.00 W	Efficacy	66.63 lm/W	Efficiency	100.00%
Sources Flux	4197.79 lm	Maximum value	394.91 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	55 mm	Height	60 mm
Rectangular Luminous Area		Length	2360 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.094400 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.022837 m2	
Coordinate system	CG			Symmetry Type		Double Symmetrical	
Date	22-05-2018			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		4197.79 lm	


LED Flux=9676,8lm LED Power=59W Eff=43% EfcLed=164lm/W EfcLum=67lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h

C.I.E.	50 81 96 100 100	D DIN 5040	A30
F UTE	1.00 E	B NBN	BZ 4

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.15	2.31	3.46	4.62	5.77	OC	1.30	2.61	3.91	5.22	6.52
OB	1.15	2.31	3.46	4.62	5.77	OD	1.30	2.61	3.91	5.22	6.52

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1657.76	1646.30	1549.22	1373.83	1158.11	926.33	691.87	458.36	231.42	48.84
OB	1657.76	1646.30	1549.22	1373.83	1158.11	926.33	691.87	458.36	231.42	48.84
OC	1657.76	1649.69	1572.23	1429.97	1236.87	1011.75	768.67	517.78	269.29	70.89
OD	1657.76	1649.69	1572.23	1429.97	1236.87	1011.75	768.67	517.78	269.29	70.89

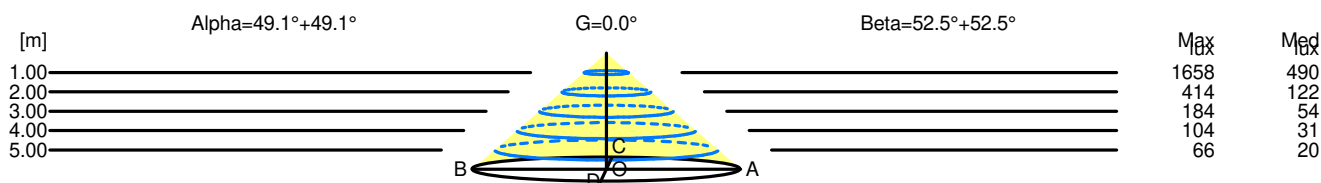

H[m]	D[m]	Max lux	Med lux	Alpha=49.1°+49.1°	G=0.0
1.00	2.31	1658	490		
2.00	4.62	414	122		
3.00	6.93	184	54		
4.00	9.23	104	31		
5.00	11.54	66	20		

H[m]	D[m]	Max lux	Med lux	Beta=52.5°+52.5°	G=0.0
1.00	2.61	1658	490		
2.00	5.22	414	122		
3.00	7.83	184	54		
4.00	10.44	104	31		
5.00	13.05	66	20		