

## Luminaire

Code AY05004  
Name SERIES Y-MOD.1200MM DIFF+IND 930 NRO

## Measurerm.

Code FTS1802389-A  
Name SERIES Y-MOD.1200MM DIFF+IND 930 NRO

Luminaire Flux	5580 lm	Luminaire Power	55.0 W	Efficacy	101.450 lm/W	Efficiency	100.00%
Source Flux	5580 lm	Maximum value	257.19 cd/klm	Position	C=30.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1125 mm	Width	90 mm	Height	90 mm
Rectangular Luminous Area		Length	1120 mm	Width	75 mm	Height	0 mm
Horizontal Luminous Area		0.084000 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.020321 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		28-02-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5580 lm	


LED Flux=7378lm LED Power=45W Eff=76% EfcLed=165lm/W EfcLum=101lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h

C.I.E. 52 83 97 62 100  
F UTE 0.62 D + 0.38 T

D DIN 5040  
B NBN

B41  
BZ 4


1125mm x 90mm



Semipiani C

180.0 ——— 0.0  
270.0 ——— 90.0

ULOR 38.01 %  
DLOR 61.99 %  
RN 38.01 %

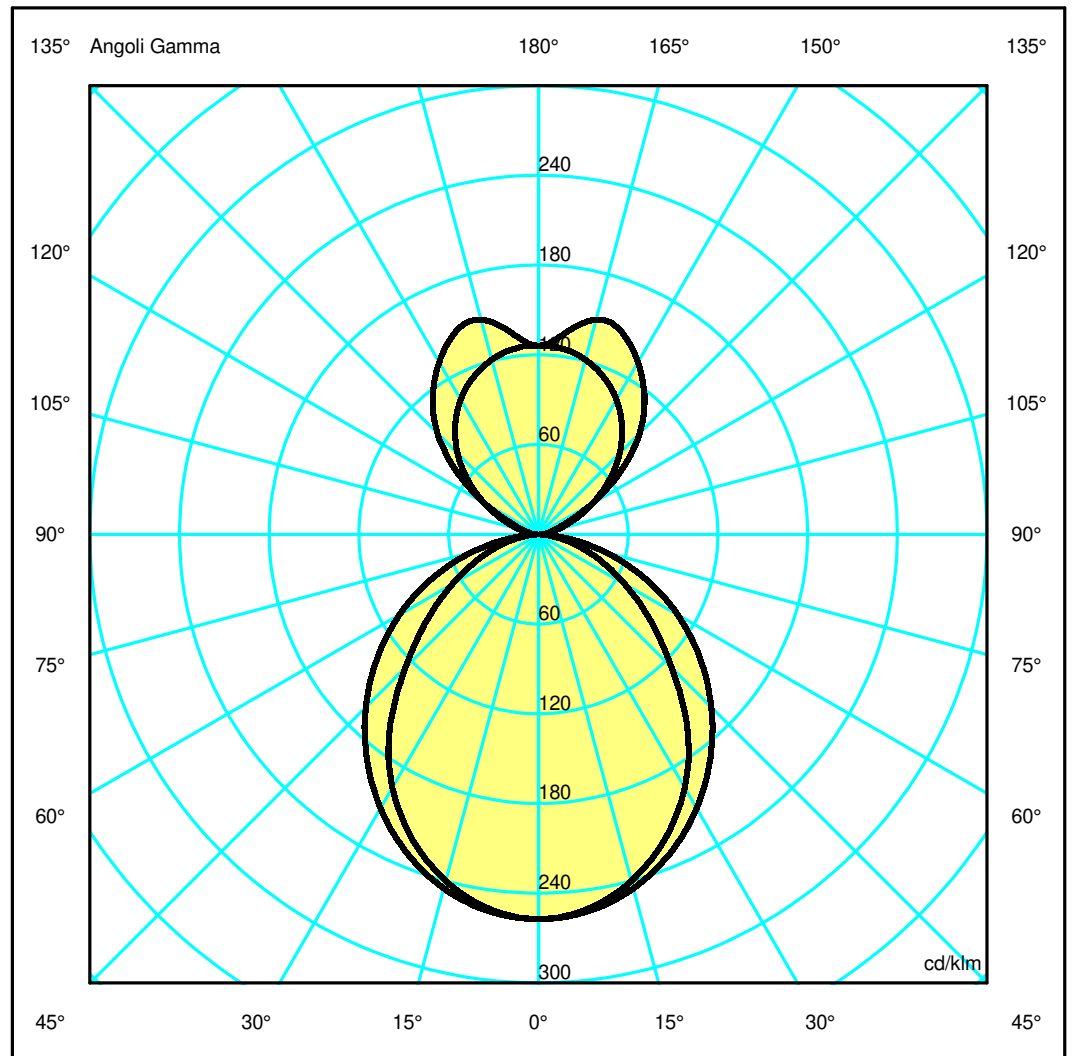

## Luminaire

Code AY05004  
Name SERIES Y-MOD.1200MM DIFF+IND 930 NRO

## Measurerm.


Code FTS1802389-A  
Name SERIES Y-MOD.1200MM DIFF+IND 930 NRO

Luminaire Flux	5580 lm	Luminaire Power	55.0 W	Efficacy	101.450 lm/W	Efficiency	100.00%
Source Flux	5580 lm	Maximum value	257.19 cd/klm	Position	C=30.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1125 mm	Width	90 mm	Height	90 mm
Rectangular Luminous Area		Length	1120 mm	Width	75 mm	Height	0 mm
Horizontal Luminous Area		0.084000 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.020321 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		28-02-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5580 lm	
LED Flux=7378lm LED Power=45W Eff=76% EfcLed=165lm/W EfcLum=101lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	52 83 97 62 100			D DIN 5040	B41		
F UTE	0.62 D + 0.38 T			B NBN	BZ 4		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.98	1.96	2.94	3.92	4.90	OC	1.40	2.81	4.21	5.61	7.01
OB	0.98	1.96	2.94	3.92	4.90	OD	1.40	2.81	4.21	5.61	7.01

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1434.95	1423.55	1338.96	1187.12	975.73	702.24	472.35	284.94	138.29	26.75
OB	1434.95	1423.55	1338.96	1187.12	975.73	702.24	472.35	284.94	138.29	26.75
OC	1434.95	1427.63	1367.84	1253.31	1097.55	912.34	707.29	487.72	259.44	60.21
OD	1434.95	1427.63	1367.84	1253.31	1097.55	912.34	707.29	487.72	259.44	60.21

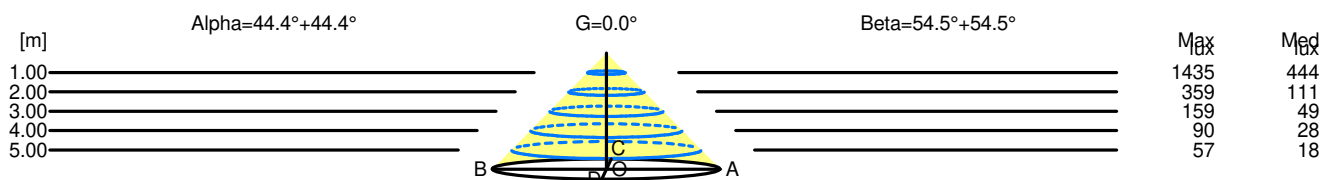

H[m]	D[m]	Max lux	Med lux	Alpha=44.4°+44.4°	G=0.0
1.00	1.96	1435	444		
2.00	3.92	359	111		
3.00	5.88	159	49		
4.00	7.84	90	28		
5.00	9.80	57	18		

H[m]	D[m]	Max lux	Med lux	Beta=54.5°+54.5°	G=0.0
1.00	2.81	1435	444		
2.00	5.61	359	111		
3.00	8.42	159	49		
4.00	11.22	90	28		
5.00	14.03	57	18		