


## Luminaire

Code BB00300+DV1017  
 Name LUCERI TLESS ROUND.max46W 930 COMFORT + Driver 35W ND

## Measurem.

Code FTS1801175  
 Name LUCERI TLESS ROUND.max46W 930 COMFORT + Driver 35W ND

Luminaire Flux	2537.80 lm	Luminaire Power	27.00 W	Efficacy	93.99 lm/W	Efficiency	100.00%
Sources Flux	2537.80 lm	Maximum value	738.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	211 mm	Height	177 mm		
Round Luminous Area		Diam.	200 mm	Height	0 mm		
Horizontal Luminous Area		0.031416 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.007600 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		15-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2537.80 lm	
LED Flux=3130lm LED Power=25W Eff=81% EfcLed=125lm/W EfcLum=94lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	77 92 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1 / 1.5 / BZ 2		

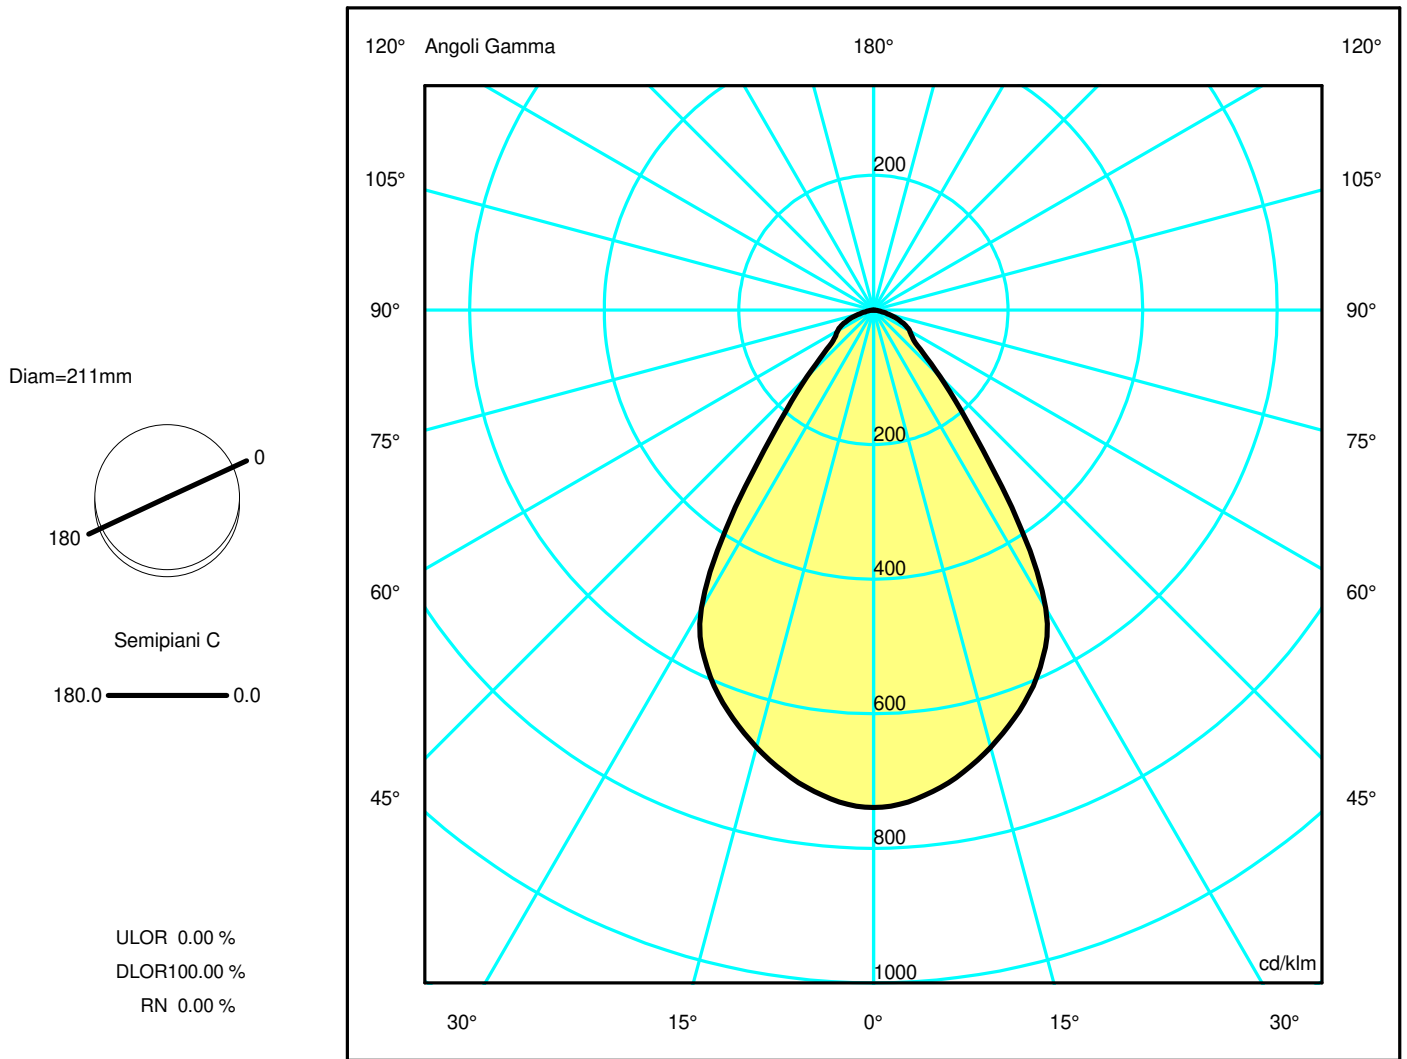

## Luminaire

Code BB00300+DV1017  
 Name LUCERI TLESS ROUND.max46W 930 COMFORT + Driver 35W ND

## Measur.

Code FTS1801175  
 Name LUCERI TLESS ROUND.max46W 930 COMFORT + Driver 35W ND


Luminaire Flux	2537.80 lm	Luminaire Power	27.00 W	Efficacy	93.99 lm/W	Efficiency	100.00%
Sources Flux	2537.80 lm	Maximum value	738.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	211 mm	Height	177 mm		
Round Luminous Area		Diam.	200 mm	Height	0 mm		
Horizontal Luminous Area		0.031416 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.007600 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		15-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2537.80 lm	
LED Flux=3130lm LED Power=25W Eff=81% EfcLed=125lm/W EfcLum=94lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	77 92 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1 / 1.5 / BZ 2		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.69	1.38	2.07	2.77	3.46	OC	0.69	1.38	2.07	2.77	3.46
OB	0.69	1.38	2.07	2.77	3.46	OD	0.69	1.38	2.07	2.77	3.46

### Luminous Intensities [ cd/klm ]

	0	5	15	25	35	45	55	65	75	85
OA	1875.35	1850.27	1706.40	1486.56	908.29	354.55	177.45	129.43	54.00	7.24
OB	1875.35	1850.27	1706.40	1486.56	908.29	354.55	177.45	129.43	54.00	7.24
OC	1875.35	1850.27	1706.40	1486.56	908.29	354.55	177.45	129.43	54.00	7.24
OD	1875.35	1850.27	1706.40	1486.56	908.29	354.55	177.45	129.43	54.00	7.24

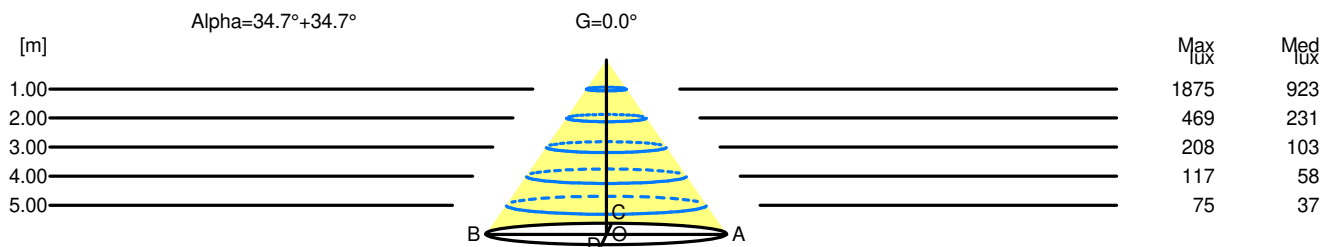

H[m]	D[m]	Max lux	Med lux	Alpha=34.7°+34.7°	G=0.0
1.00	1.38	1875	923		
2.00	2.77	469	231		
3.00	4.15	208	103		
4.00	5.53	117	58		
5.00	6.91	75	37		