

Luminaire

Code BB01100+DV1017 + M239600
 Name LUCERI TLESS CUT.EDGE max46W 940 MIRROR + Driver 35W ND + schermo prismoptic

Measurem.

Code FTS1801370
 Name LUCERI TLESS CUT.EDGE max46W 940 MIRROR + Driver 35W ND + schermo prismoptic

Luminaire Flux	2366.37 lm	Luminaire Power	27.00 W	Efficacy	87.64 lm/W	Efficiency	100.00%
Sources Flux	2366.37 lm	Maximum value	741.94 cd/klm	Position	C=0.00 G=5.00	CG	Rotosymmetrical
Round Luminaire		Diam.	250 mm	Height	185 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area			0.030172 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.007299 m2
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		21-06-2018		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			2366.37 lm
LED Flux=3348lm LED Power=25W Eff=71% EfcLed=134lm/W EfcLum=88lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	77 96 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

Diam=250mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

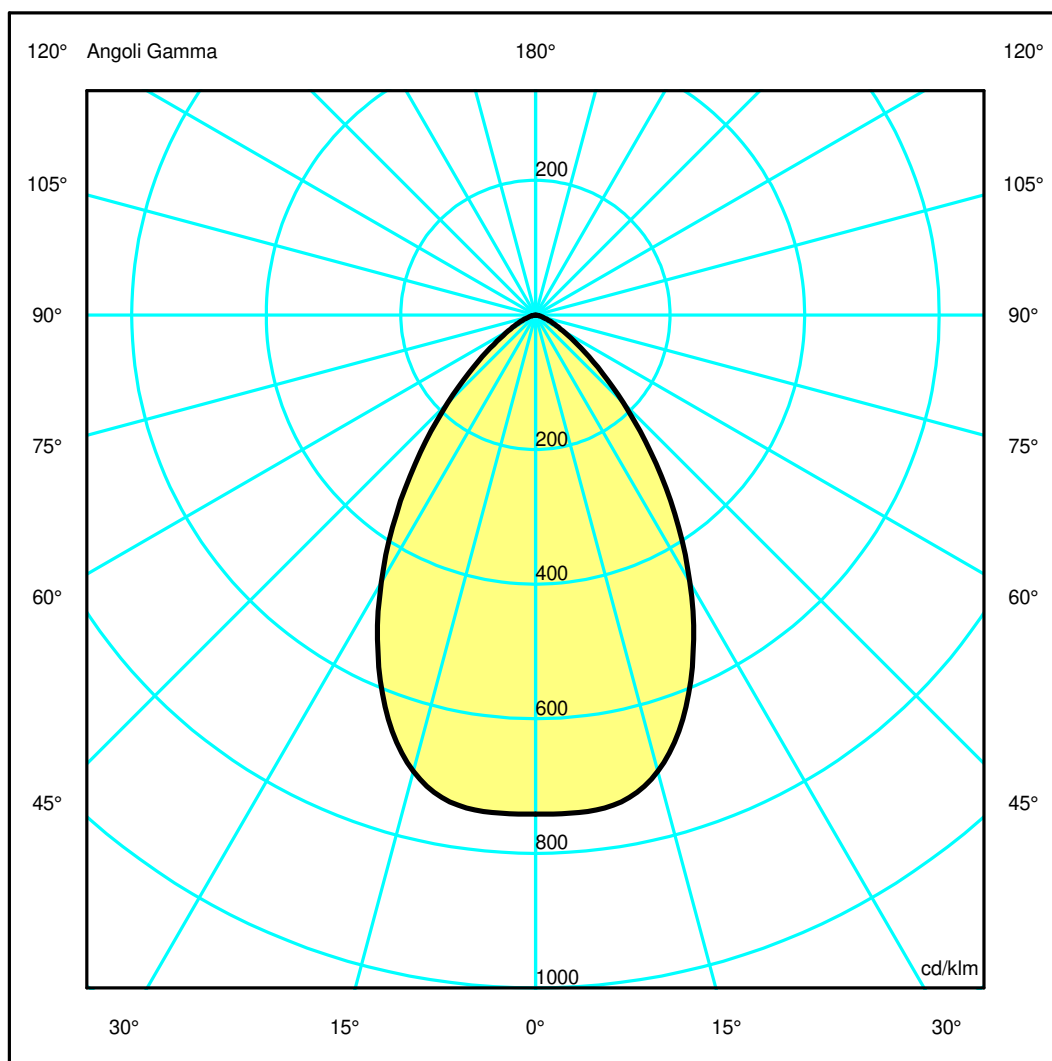

Luminaire

Code BB01100+DV1017 + M239600
 Name LUCERI TLESS CUT.EDGE max46W 940 MIRROR + Driver 35W ND + schermo prismoptic

Measurement


Code FTS1801370
 Name LUCERI TLESS CUT.EDGE max46W 940 MIRROR + Driver 35W ND + schermo prismoptic

Luminaire Flux	2366.37 lm	Luminaire Power	27.00 W	Efficacy	87.64 lm/W	Efficiency	100.00%
Sources Flux	2366.37 lm	Maximum value	741.94 cd/klm	Position	C=0.00 G=5.00	CG	Rotosymmetrical
Round Luminaire		Diam.	250 mm	Height	185 mm		
Round Luminous Area		Diam.	196 mm	Height	0 mm		
Horizontal Luminous Area		0.030172 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007299 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2366.37 lm	
LED Flux=3348lm LED Power=25W Eff=71% EfcLed=134lm/W EfcLum=88lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	77 96 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.69	1.37	2.06	2.75	3.43	OC	0.69	1.37	2.06	2.75	3.43
OB	0.69	1.37	2.06	2.75	3.43	OD	0.69	1.37	2.06	2.75	3.43

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1754.90	1755.70	1660.69	1311.32	852.66	437.61	179.40	68.14	22.14	3.85
OB	1754.90	1755.70	1660.69	1311.32	852.66	437.61	179.40	68.14	22.14	3.85
OC	1754.90	1755.70	1660.69	1311.32	852.66	437.61	179.40	68.14	22.14	3.85
OD	1754.90	1755.70	1660.69	1311.32	852.66	437.61	179.40	68.14	22.14	3.85

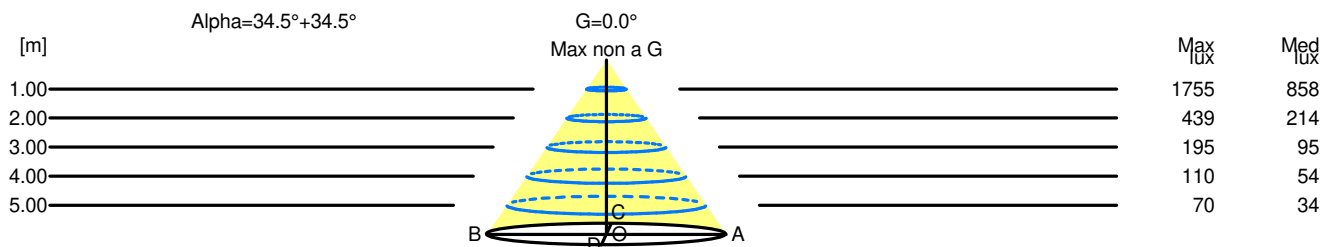

H[m]	D[m]	Max lux	Med lux	Alpha=34.5°+34.5°	G=0.0 Max non a G
1.00	1.37	1755	858		
2.00	2.75	439	214		
3.00	4.12	195	95		
4.00	5.49	110	54		
5.00	6.86	70	34		