

Luminaire

Code BB10300+DV1017 + M239200
 Name LUCERI Q TLESS ROUND.max 46W 930 COMFORT + Driver 35W ND + schermo trasparente

Measurem.

Code FTS1801243
 Name LUCERI Q TLESS ROUND.max 46W 930 COMFORT + Driver 35W ND + schermo trasparente


Luminaire Flux	2079.26 lm	Luminaire Power	27.00 W	Efficacy	77.01 lm/W	Efficiency	100.00%
Sources Flux	2079.26 lm	Maximum value	855.25 cd/klm	Position	C=10.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	318 mm	Width	318 mm	Height	280 mm
Rectangular Luminous Area		Length	170 mm	Width	170 mm	Height	0 mm
Horizontal Luminous Area		0.028900 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006992 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2079.26 lm	

LED Flux=3130lm LED Power=25W Eff=66% EfcLed=125lm/W EfcLum=77lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h


C.I.E. 79 94 99 100 100
 F UTE 1.00 B

D DIN 5040
 B NBN

A60
 BZ 1

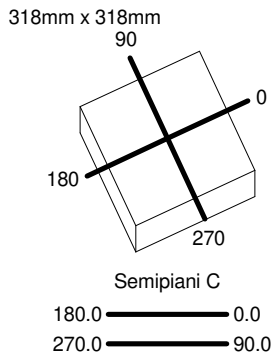

ULOR 0.03 %
 DLOR 99.97 %
 RN 0.03 %

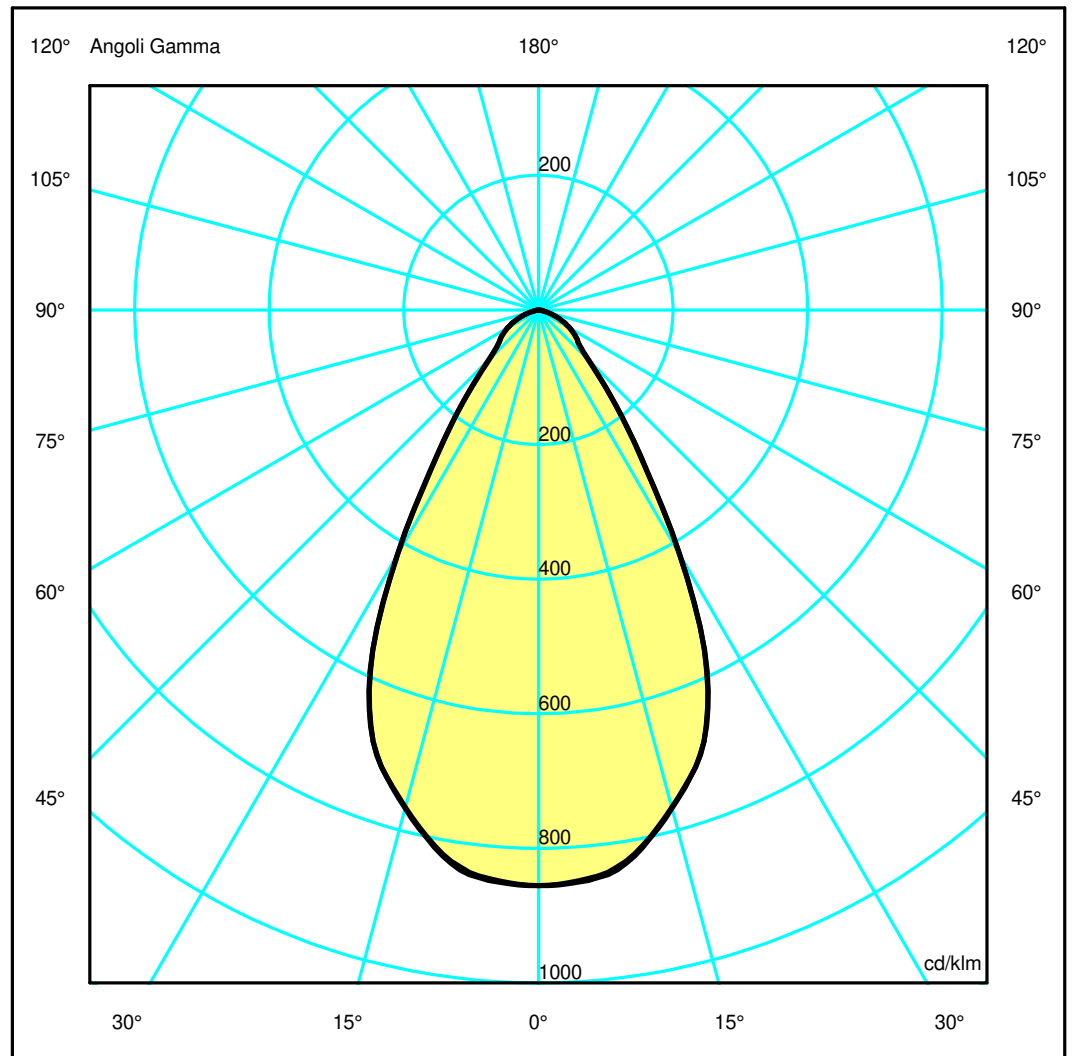

Luminaire

Code BB10300+DV1017 + M239200
 Name LUCERI Q TLESS ROUND.max 46W 930 COMFORT + Driver 35W ND + schermo trasparente

Measurement

Code FTS1801243
 Name LUCERI Q TLESS ROUND.max 46W 930 COMFORT + Driver 35W ND + schermo trasparente

Luminaire Flux	2079.26 lm	Luminaire Power	27.00 W	Efficacy	77.01 lm/W	Efficiency	100.00%
Sources Flux	2079.26 lm	Maximum value	855.25 cd/klm	Position	C=10.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	318 mm	Width	318 mm	Height	280 mm
Rectangular Luminous Area		Length	170 mm	Width	170 mm	Height	0 mm
Horizontal Luminous Area		0.028900 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006992 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2079.26 lm	


LED Flux=3130lm LED Power=25W Eff=66% EfcLed=125lm/W EfcLum=77lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h

C.I.E.	79 94 99 100 100	D DIN 5040	A60
F UTE	1.00 B	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.57	1.14	1.71	2.29	2.86	OC	0.57	1.14	1.72	2.29	2.86
OB	0.57	1.14	1.71	2.29	2.86	OD	0.57	1.14	1.72	2.29	2.86

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1777.65	1768.57	1592.62	1229.36	545.40	219.36	137.70	83.07	30.83	6.91
OB	1777.65	1768.57	1592.62	1229.36	545.40	219.36	137.70	83.07	30.83	6.91
OC	1777.65	1762.93	1591.15	1233.00	549.11	217.40	138.38	82.84	30.11	6.58
OD	1777.65	1762.93	1591.15	1233.00	549.11	217.40	138.38	82.84	30.11	6.58

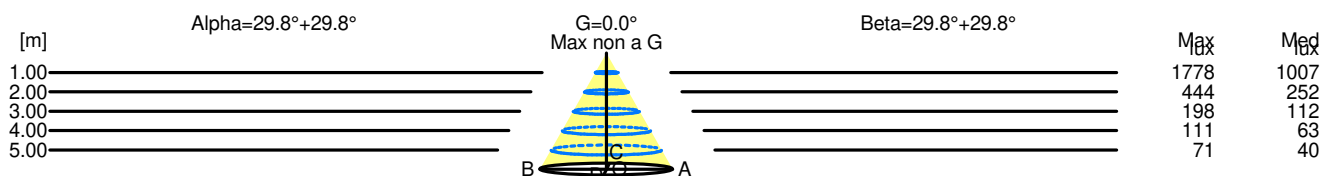

H[m]	D[m]	Max lux	Med lux	Alpha=29.8°+29.8°	G=0.0° Max non a G
1.00	1.14	1778	1007		
2.00	2.29	444	252		
3.00	3.43	198	112		
4.00	4.57	111	63		
5.00	5.72	71	40		

H[m]	D[m]	Max lux	Med lux	Beta=29.8°+29.8°	G=0.0° Max non a G
1.00	1.14	1778	1007		
2.00	2.29	444	252		
3.00	3.43	198	112		
4.00	4.58	111	63		
5.00	5.72	71	40		