


## Luminaire

Code BB10300+DV1017 + M239600  
 Name LUCERI Q TLESS ROUND.max 46W 930 COMFORT + Driver 35W ND + schermo prismoptic

## Measurem.

Code FTS1801371  
 Name LUCERI Q TLESS ROUND.max 46W 930 COMFORT + Driver 35W ND + schermo prismoptic

Luminaire Flux	1810.39 lm	Luminaire Power	27.00 W	Efficacy	67.05 lm/W	Efficiency	100.00%
Sources Flux	1810.39 lm	Maximum value	842.43 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	318 mm	Width	318 mm	Height	280 mm
Rectangular Luminous Area		Length	170 mm	Width	170 mm	Height	0 mm
Horizontal Luminous Area		0.028900 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006992 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1810.39 lm	
LED Flux=3130lm LED Power=25W Eff=58% EfcLed=125lm/W EfcLum=67lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	76 94 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1 / 2.5 / BZ 2		

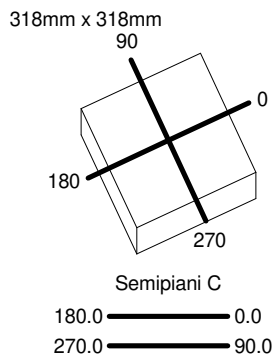

ULOR 0.04 %  
 DLOR 99.96 %  
 RN 0.04 %

