

## Luminaire

Code BB10600\_W+M239300  
 Name LUCERI Q TLESS 36W 230V TW COMFORTLUCERI KADRO SCHERMO TRASPARENTE

## Measurem.


Code FTS2102264  
 Name LUCERI Q TLESS 36W 230V TW COMFORTLUCERI KADRO SCHERMO TRASPARENTE

Luminaire Flux	2232.74 lm	Luminaire Power	36.00 W	Efficacy	62.02 lm/W	Efficiency	100.00%
Sources Flux	2232.74 lm	Maximum value	862.43 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	237 mm	Width	237 mm	Height	238 mm
Rectangular Luminous Area		Length	173 mm	Width	173 mm	Height	0 mm
Horizontal Luminous Area		0.029929 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007240 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		30-06-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2232.74 lm	


LED Flux=3343lm LED Power=31W Eff=67% EfcLed=107lm/W EfcLum=62lm/W CCT=2700K Ra=90 SDCM=3 L70(10K)=55000

C.I.E. 80 94 99 100 100  
 F UTE 1.00 B

D DIN 5040  
 B NBN A60  
 BZ 1

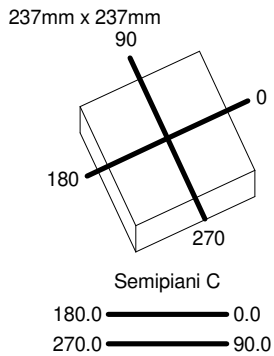

ULOR 0.00 %  
 DLOR100.00 %  
 RN 0.00 %

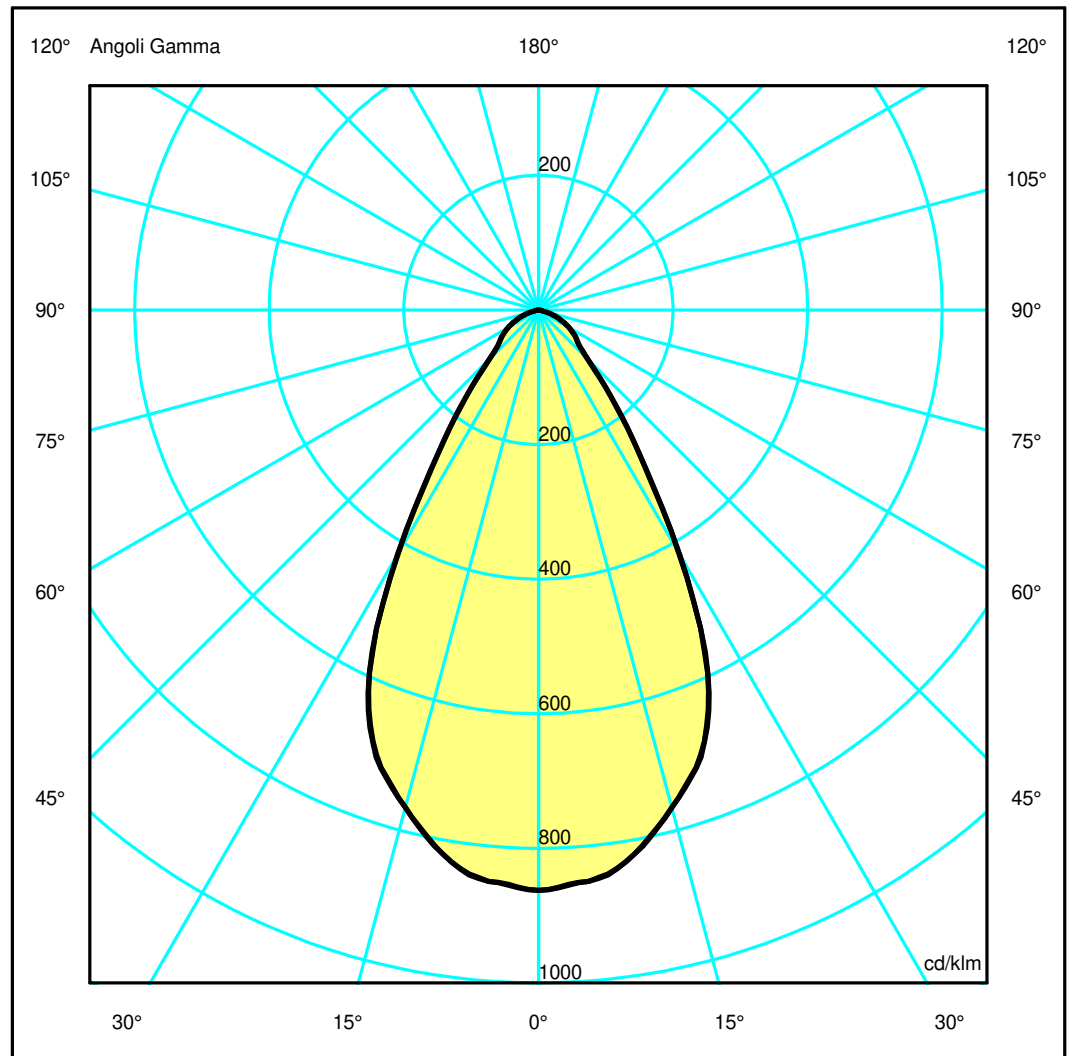

## Luminaire

Code BB10600\_W+M239300  
 Name LUCERI Q TLESS 36W 230V TW COMFORTLUCERI KADRO SCHERMO TRASPARENTE

## Measurment

Code FTS2102264  
 Name LUCERI Q TLESS 36W 230V TW COMFORTLUCERI KADRO SCHERMO TRASPARENTE

Luminaire Flux	2232.74 lm	Luminaire Power	36.00 W	Efficacy	62.02 lm/W	Efficiency	100.00%
Sources Flux	2232.74 lm	Maximum value	862.43 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	237 mm	Width	237 mm	Height	238 mm
Rectangular Luminous Area		Length	173 mm	Width	173 mm	Height	0 mm
Horizontal Luminous Area		0.029929 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007240 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		30-06-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2232.74 lm	


LED Flux=3343lm LED Power=31W Eff=67% EfcLed=107lm/W EfcLum=62lm/W CCT=2700K Ra=90 SDCM=3 L70(10K)=55000

C.I.E.	80 94 99 100 100	D DIN 5040	A60
F UTE	1.00 B	B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.57	1.14	1.71	2.28	2.85	OC	0.57	1.14	1.71	2.27	2.84
OB	0.57	1.14	1.71	2.28	2.85	OD	0.57	1.14	1.71	2.27	2.84

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1925.59	1902.33	1708.99	1326.91	582.83	229.71	145.76	86.82	30.69	4.25
OB	1925.59	1902.33	1708.99	1326.91	582.83	229.71	145.76	86.82	30.69	4.25
OC	1925.59	1902.42	1708.35	1329.71	582.44	232.25	147.19	87.11	30.40	4.22
OD	1925.59	1902.42	1708.35	1329.71	582.44	232.25	147.19	87.11	30.40	4.22

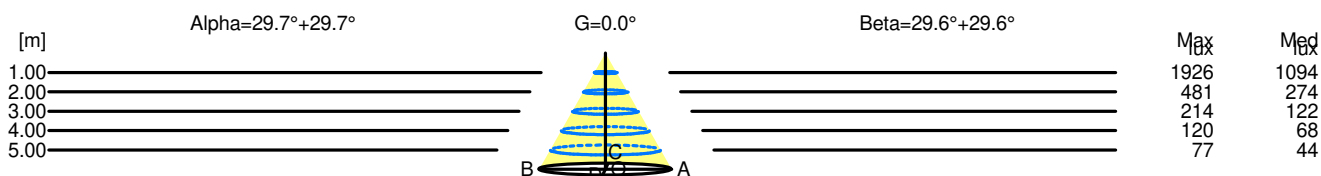

H[m]	D[m]	Max lux	Med lux	Alpha=29.7°+29.7°	G=0.0
1.00	1.14	1926	1094		
2.00	2.28	481	274		
3.00	3.42	214	122		
4.00	4.56	120	68		
5.00	5.70	77	44		

H[m]	D[m]	Max lux	Med lux	Beta=29.6°+29.6°	G=0.0
1.00	1.14	1926	1094		
2.00	2.27	481	274		
3.00	3.41	214	122		
4.00	4.55	120	68		
5.00	5.68	77	44		