


Luminaire

Code BB11000+DV1017 + M239200
 Name LUCERI Q TLESS CUT.EDGEmax46W 930 MIRROR + Driver 35W ND + schermo trasparente


Measurem.

Code FTS1801245
 Name LUCERI Q TLESS CUT.EDGEmax46W 930 MIRROR + Driver 35W ND + schermo trasparente

Luminaire Flux	2349.69 lm	Luminaire Power	27.00 W	Efficacy	87.03 lm/W	Efficiency	100.00%
Sources Flux	2349.69 lm	Maximum value	1073.64 cd/klm	Position	C=0.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	236 mm	Width	236 mm	Height	185 mm
Rectangular Luminous Area		Length	170 mm	Width	170 mm	Height	0 mm
Horizontal Luminous Area		0.028900 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006992 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2349.69 lm	
LED Flux=3130lm LED Power=25W Eff=75% EfcLed=125lm/W EfcLum=87lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	93 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

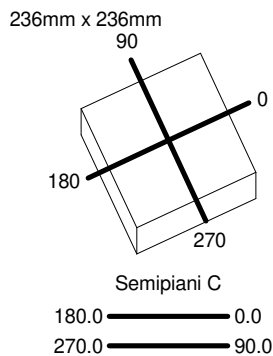

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

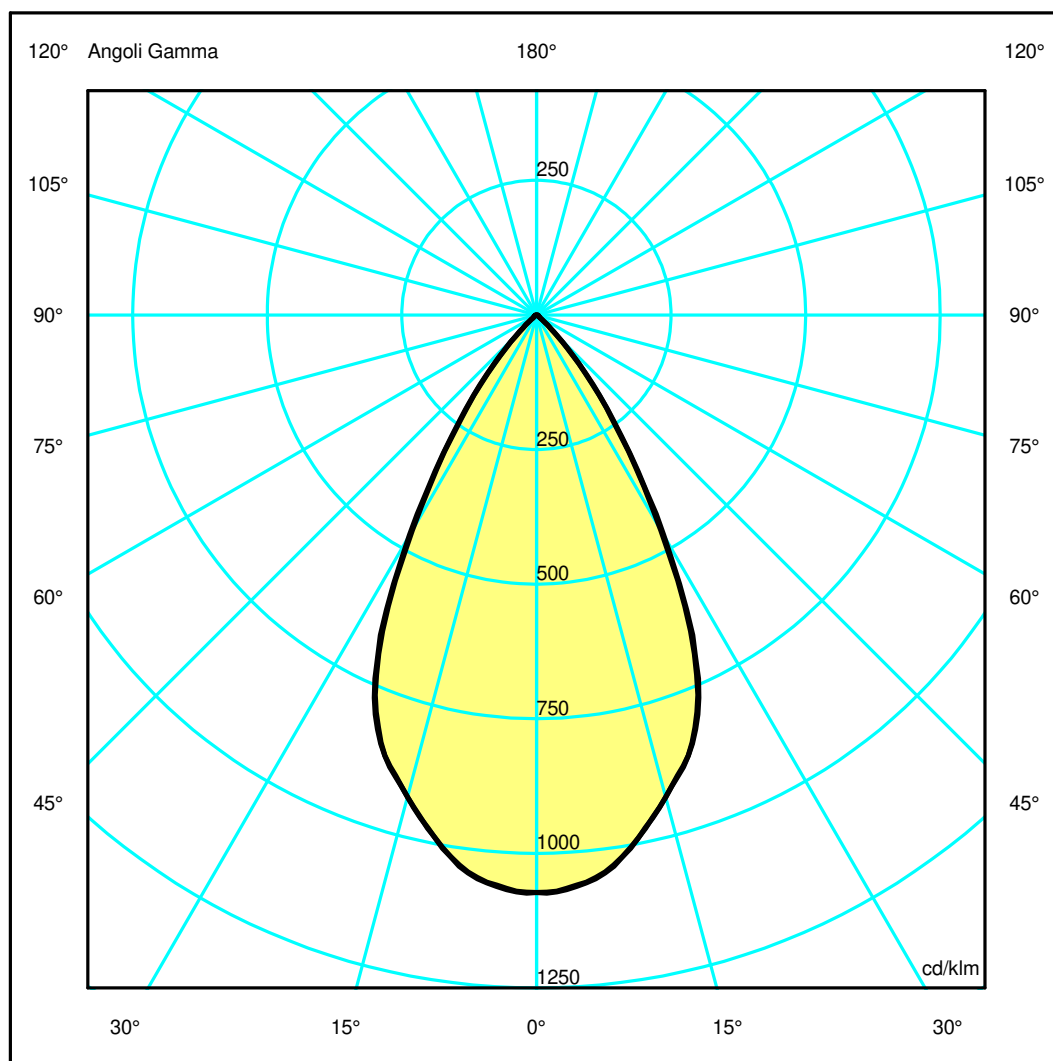

Luminaire

Code BB11000+DV1017 + M239200
 Name LUCERI Q TLESS CUT.EDGEmax46W 930 MIRROR + Driver 35W ND + schermo trasparente

Measurement


Code FTS1801245
 Name LUCERI Q TLESS CUT.EDGEmax46W 930 MIRROR + Driver 35W ND + schermo trasparente

Luminaire Flux	2349.69 lm	Luminaire Power	27.00 W	Efficacy	87.03 lm/W	Efficiency	100.00%
Sources Flux	2349.69 lm	Maximum value	1073.64 cd/klm	Position	C=0.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	236 mm	Width	236 mm	Height	185 mm
Rectangular Luminous Area		Length	170 mm	Width	170 mm	Height	0 mm
Horizontal Luminous Area		0.028900 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.006992 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-06-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2349.69 lm	
LED Flux=3130lm LED Power=25W Eff=75% EfcLed=125lm/W EfcLum=87lm/W CCT=3000K Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	93 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.54	1.08	1.62	2.17	2.71	OC	0.54	1.09	1.63	2.18	2.72
OB	0.54	1.08	1.62	2.17	2.71	OD	0.54	1.09	1.63	2.18	2.72

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2520.50	2487.32	2177.46	1630.46	631.65	125.38	14.60	9.11	6.43	3.36
OB	2520.50	2487.32	2177.46	1630.46	631.65	125.38	14.60	9.11	6.43	3.36
OC	2520.50	2484.37	2178.22	1639.88	647.58	133.13	15.77	9.67	6.62	3.24
OD	2520.50	2484.37	2178.22	1639.88	647.58	133.13	15.77	9.67	6.62	3.24

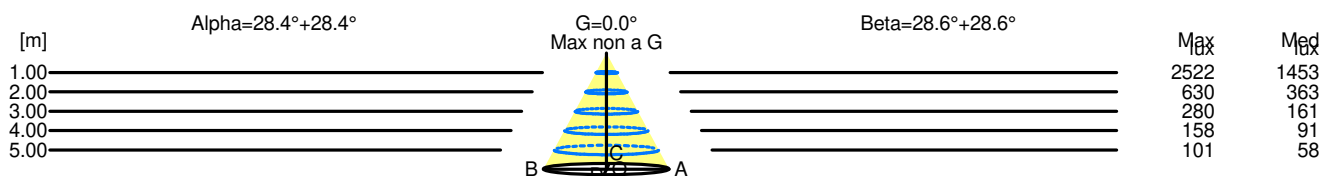

H[m]	D[m]	Max lux	Med lux	Alpha=28.4°+28.4°	G=0.0 Max non a G
1.00	1.08	2522	1453		
2.00	2.17	630	363		
3.00	3.25	280	161		
4.00	4.33	158	91		
5.00	5.41	101	58		

H[m]	D[m]	Max lux	Med lux	Beta=28.6°+28.6°	G=0.0 Max non a G
1.00	1.09	2522	1453		
2.00	2.18	630	363		
3.00	3.27	280	161		
4.00	4.36	158	91		
5.00	5.45	101	58		