


Luminaire

Code BB12101+DV1018 + M239200
 Name LUCERI Q TRIM max46W 940 MIRROR WHITE + Driver 35W DIM + schermo trasparente


Measurem.

Code FTS1801246
 Name LUCERI Q TRIM max46W 940 MIRROR WHITE + Driver 35W DIM + schermo trasparente

| | | | | | | | |
|--|---|------------------|---|---|------------------|----------------|--------------------|
| Luminaire Flux | 2513.34 lm | Luminaire Power | 27.00 W | Efficacy | 93.09 lm/W | Efficiency | 100.00% |
| Sources Flux | 2513.34 lm | Maximum value | 1073.64 cd/klm | Position | C=0.00 G=1.00 | CG | Double Symmetrical |
| Rectangular Luminaire Rectangular Luminous Area | Length Length | 236 mm 170 mm | Width Width | 236 mm 170 mm | Height Height | 185 mm 0 mm | |
| Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90° | 0.028900 m2 0.000000 m2 0.000000 m2 | | Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76° | 0.000000 m2 0.000000 m2 0.006992 m2 | | | |
| Coordinate system Date Measurement Distance | CG 21-06-2018 0.00 | | Symmetry Type Maximum Gamma Angle Measurement Flux | Double Symmetrical 180 2513.34 lm | | | |
| LED Flux=3348lm LED Power=25W Eff=75% EfcLed=134lm/W EfcLum=93lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h | | | | | | | |
| C.I.E. F UTE | 93 99 100 100 100 1.00 A | | D DIN 5040 B NBN | A60 BZ 1 | | | |

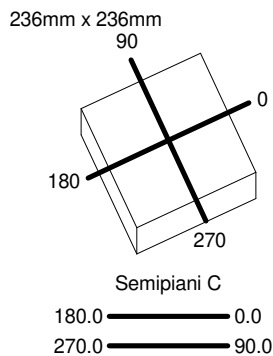

ULOR 0.00 %
 DLOR100.00 %
 RN 0.00 %

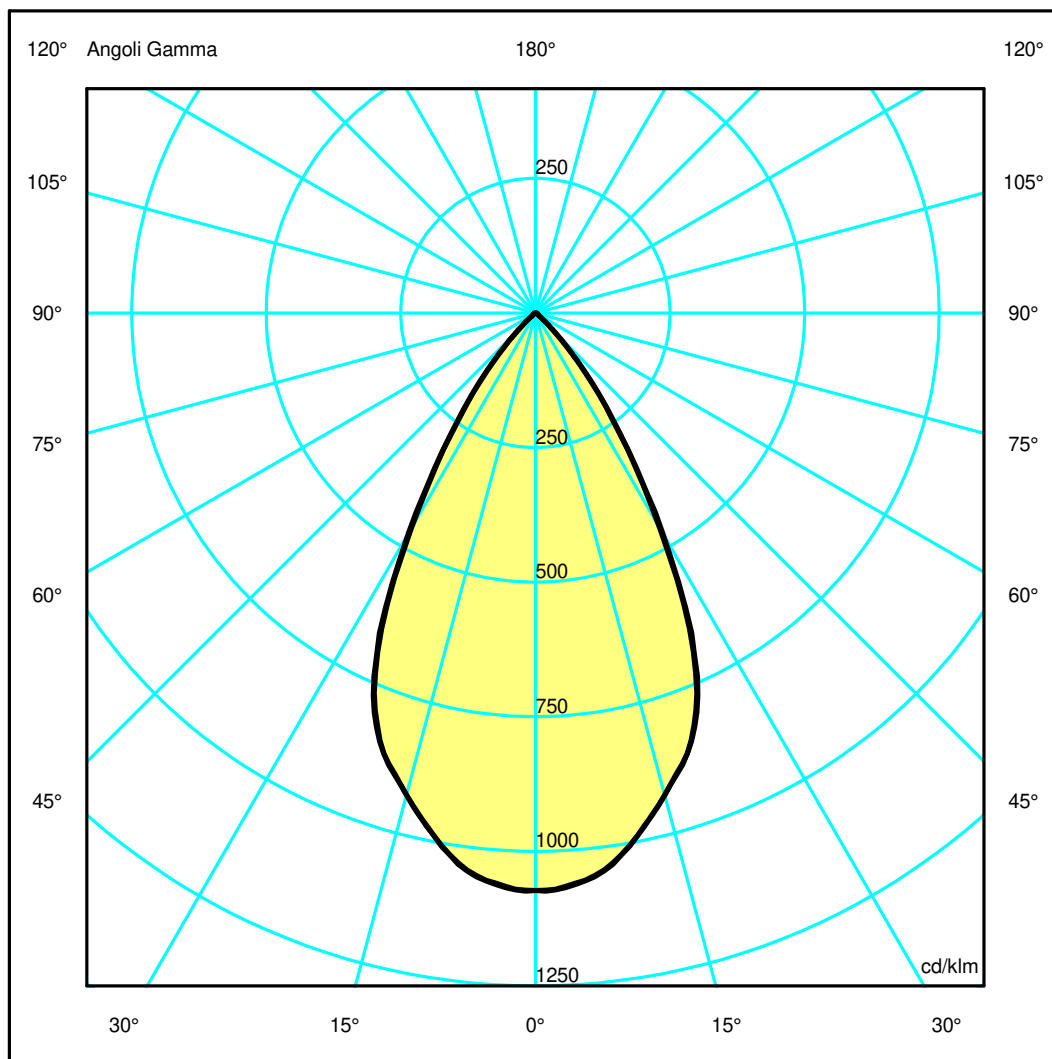

Luminaire

Code BB12101+DV1018 + M239200
 Name LUCERI Q TRIM max46W 940 MIRROR WHITE + Driver 35W DIM + schermo trasparente

Measurem.

Code FTS1801246
 Name LUCERI Q TRIM max46W 940 MIRROR WHITE + Driver 35W DIM + schermo trasparente


| | | | | | | | |
|--|-------------------|-----------------|----------------|-----------------------------|---------------|--------------------|--------------------|
| Luminaire Flux | 2513.34 lm | Luminaire Power | 27.00 W | Efficacy | 93.09 lm/W | Efficiency | 100.00% |
| Sources Flux | 2513.34 lm | Maximum value | 1073.64 cd/klm | Position | C=0.00 G=1.00 | CG | Double Symmetrical |
| Rectangular Luminaire | | Length | 236 mm | Width | 236 mm | Height | 185 mm |
| Rectangular Luminous Area | | Length | 170 mm | Width | 170 mm | Height | 0 mm |
| Horizontal Luminous Area | | 0.028900 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.006992 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 21-06-2018 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 2513.34 lm | |
| LED Flux=3348lm LED Power=25W Eff=75% EfcLed=134lm/W EfcLum=93lm/W CCT=4000K Ra=90 SDCM=1 L70(6K)=50000h | | | | | | | |
| C.I.E. | 93 99 100 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | 1.00 A | | | B NBN | BZ 1 | | |

Width at 50.00 % of Max Intensity

| | | | | | | | | | | | |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA | 0.54 | 1.08 | 1.62 | 2.17 | 2.71 | OC | 0.54 | 1.09 | 1.63 | 2.18 | 2.72 |
| OB | 0.54 | 1.08 | 1.62 | 2.17 | 2.71 | OD | 0.54 | 1.09 | 1.63 | 2.18 | 2.72 |

Luminous Intensities [cd/klm]

| | | | | | | | | | | |
|----|---------|---------|---------|---------|--------|--------|-------|-------|------|------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 2696.04 | 2660.56 | 2329.12 | 1744.02 | 675.64 | 134.12 | 15.61 | 9.74 | 6.88 | 3.59 |
| OB | 2696.04 | 2660.56 | 2329.12 | 1744.02 | 675.64 | 134.12 | 15.61 | 9.74 | 6.88 | 3.59 |
| OC | 2696.04 | 2657.40 | 2329.93 | 1754.09 | 692.68 | 142.40 | 16.87 | 10.34 | 7.08 | 3.46 |
| OD | 2696.04 | 2657.40 | 2329.93 | 1754.09 | 692.68 | 142.40 | 16.87 | 10.34 | 7.08 | 3.46 |

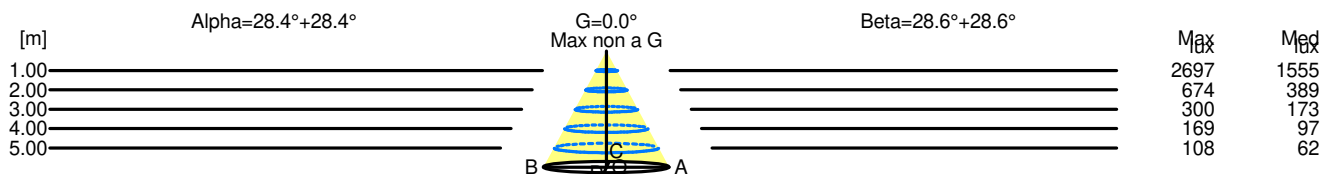

| H[m] | D[m] | Max lux | Med lux | Alpha=28.4°+28.4° | G=0.0 Max non a G |
|------|------|---------|---------|-------------------|----------------------|
| 1.00 | 1.08 | 2697 | 1555 | | |
| 2.00 | 2.17 | 674 | 389 | | |
| 3.00 | 3.25 | 300 | 173 | | |
| 4.00 | 4.33 | 169 | 97 | | |
| 5.00 | 5.41 | 108 | 62 | | |

| H[m] | D[m] | Max lux | Med lux | Beta=28.6°+28.6° | G=0.0 Max non a G |
|------|------|---------|---------|------------------|----------------------|
| 1.00 | 1.09 | 2697 | 1555 | | |
| 2.00 | 2.18 | 674 | 389 | | |
| 3.00 | 3.27 | 300 | 173 | | |
| 4.00 | 4.36 | 169 | 97 | | |
| 5.00 | 5.45 | 108 | 62 | | |