

Luminaire


Code BH12004+BH16001
 Name A.39 SHARP D+IND 1184 LB 17 300K ND NRO + COVER 2X4 OPT. LB WHITE

Measurement

Code FTS1900325-A
 Name A.39 SHARP D+IND 1184 LB 17 300K ND NRO + COVER 2X4 OPT. LB WHITE

Luminaire Flux	4723 lm	Luminaire Power	53.0 W	Efficacy	89.113 lm/W	Efficiency	100.00%
Source Flux	4723 lm	Maximum value	1933.94 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	296 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.010952 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.002650 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-11-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4723 lm	
LED Flux=5884lm LED Power=42W Eff=80% EfcLed=140lm/W EfcLum=89lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(17k)=102000h							
C.I.E.	99	100	100	35	100	D DIN 5040	D62
F UTE	--					B NBN	BZ 1


1184mm x 40mm



Semipiani C

180.0 — 0.0
 270.0 — 90.0

ULOR 65.10 %
 DLOR 34.90 %
 RN 65.10 %

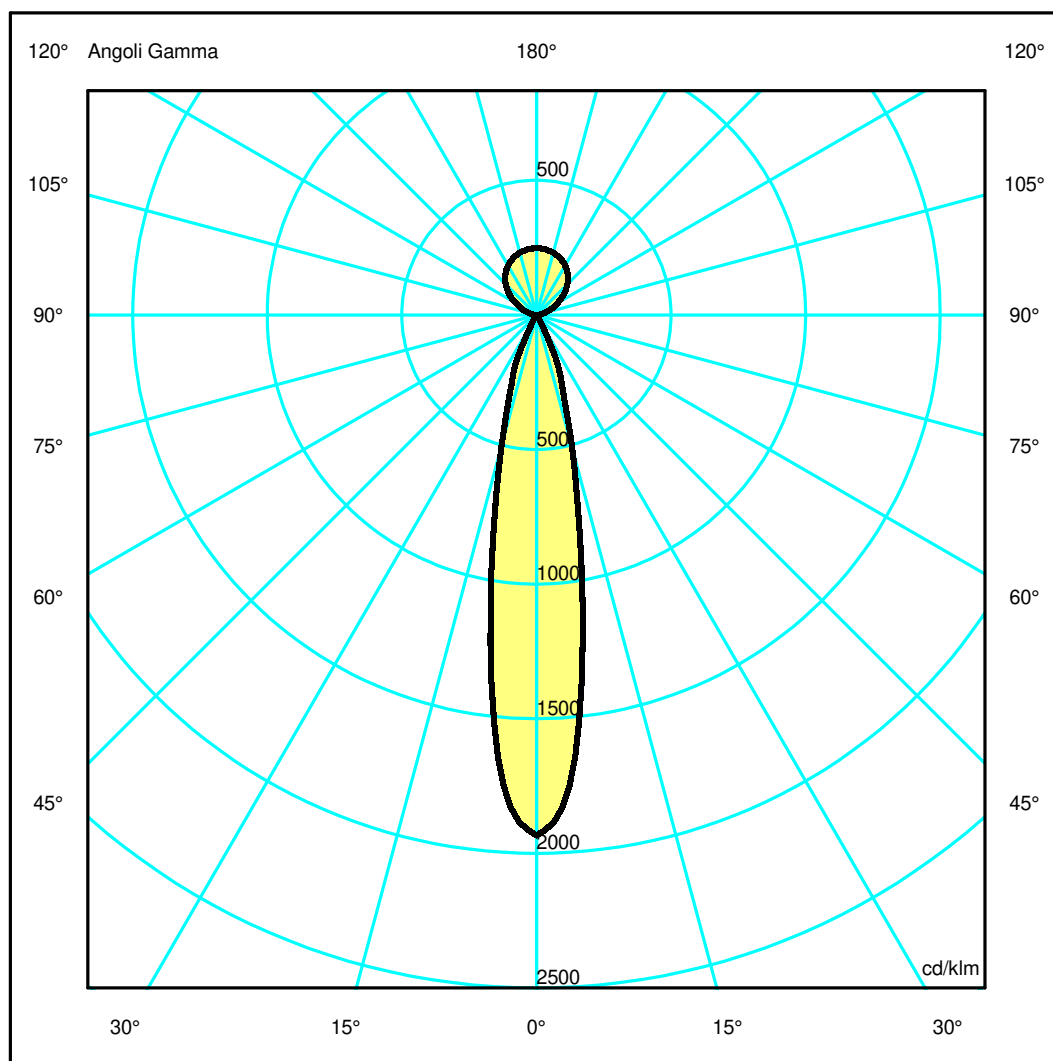

Luminaire

Code BH12004+BH16001
Name A.39 SHARP D+IND 1184 LB 17 300K ND NRO + COVER 2X4 OPT. LB WHITE

Measurerm.

Code FTS1900325-A
Name A.39 SHARP D+IND 1184 LB 17 300K ND NRO + COVER 2X4 OPT. LB WHITE

Luminaire Flux	4723 lm	Luminaire Power	53.0 W	Efficacy	89.113 lm/W	Efficiency	100.00%
Source Flux	4723 lm	Maximum value	1933.94 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	296 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.010952 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002650 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-11-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4723 lm	


LED Flux=5884lm LED Power=42W Eff=80% EfcLed=140lm/W EfcLum=89lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(17k)=102000h

C.I.E.	99 100 100 35 100	D DIN 5040	D62
F UTE	--	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.35	0.53	0.70	0.88	OC	0.18	0.35	0.53	0.70	0.88
OB	0.18	0.35	0.53	0.70	0.88	OD	0.18	0.35	0.53	0.70	0.88

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	9134.00	7773.06	2398.08	655.68	41.14	11.61	4.04	2.58	1.83	0.86
OB	9134.00	7773.06	2398.08	655.68	41.14	11.61	4.04	2.58	1.83	0.86
OC	9134.00	7773.06	2398.08	655.68	41.14	11.61	4.04	2.58	1.83	0.86
OD	9134.00	7773.06	2398.08	655.68	41.14	11.61	4.04	2.58	1.83	0.86

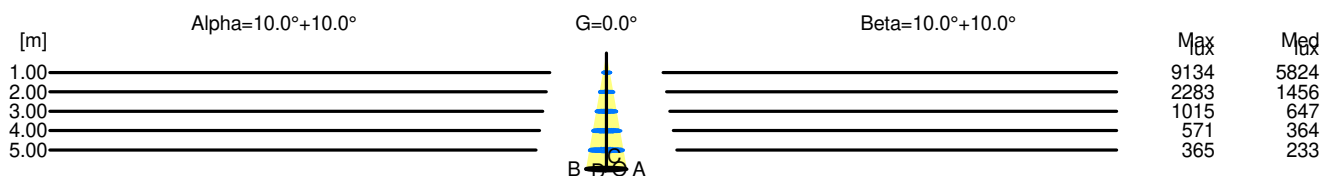

H[m]	D[m]	Max lux	Med lux	Alpha=10.0°+10.0°	G=0.0
1.00	0.35	9134	5824		
2.00	0.70	2283	1456		
3.00	1.05	1015	647		
4.00	1.41	571	364		
5.00	1.76	365	233		

H[m]	D[m]	Max lux	Med lux	Beta=10.0°+10.0°	G=0.0
1.00	0.35	9134	5824		
2.00	0.70	2283	1456		
3.00	1.05	1015	647		
4.00	1.41	571	364		
5.00	1.76	365	233		