

## Luminaire

Code BH12404+BH16004  
 Name A.39 SHARP D+IND 1184 LB 34 300K ND NRO + COVER 2X4 OPT. LB BLACK

## Measurement

Code FTS1900043-A  
 Name A.39 SHARP D+IND 1184 LB 34 300K ND NRO + COVER 2X4 OPT. LB BLACK

Luminaire Flux	4598 lm	Luminaire Power	53.0 W	Efficacy	86.755 lm/W	Efficiency	100.00%
Source Flux	4598 lm	Maximum value	871.62 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	296 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.010952 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.002650 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-11-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4598 lm	
LED Flux=5884lm LED Power=42W Eff=78% EfcLed=140lm/W EfcLum=87lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(17k)=102000h							
C.I.E.	99 100 100 33 100			D DIN 5040		D62	
F UTE	--			B NBN		BZ 1	

1184mm x 40mm




Semipiani C

180.0 — 0.0  
 270.0 — 90.0

ULOR 66.87 %

DLOR 33.13 %

RN 66.87 %

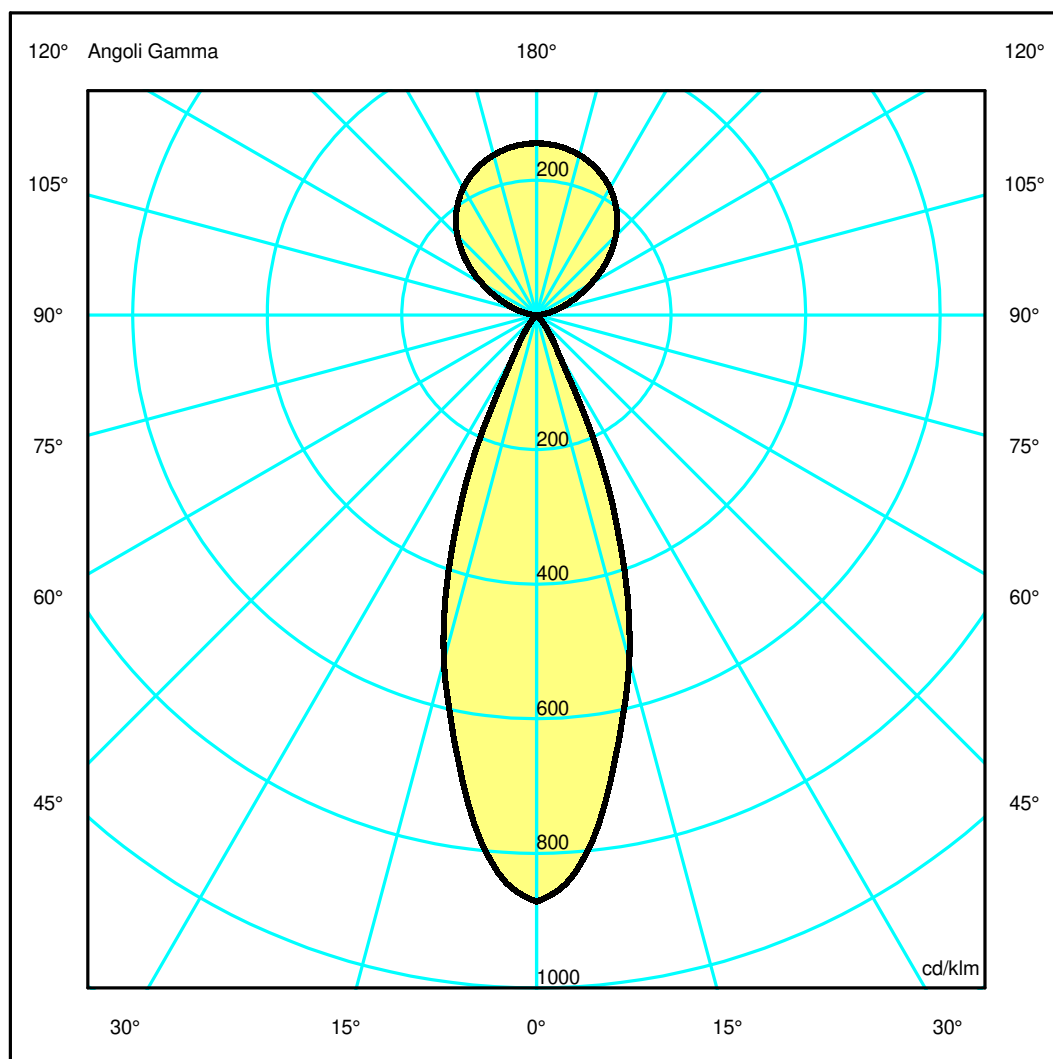

## Luminaire

Code BH12404+BH16004  
Name A.39 SHARP D+IND 1184 LB 34 300K ND NRO + COVER 2X4 OPT. LB BLACK

## Measurerm.

Code FTS1900043-A  
Name A.39 SHARP D+IND 1184 LB 34 300K ND NRO + COVER 2X4 OPT. LB BLACK

Luminaire Flux	4598 lm	Luminaire Power	53.0 W	Efficacy	86.755 lm/W	Efficiency	100.00%
Source Flux	4598 lm	Maximum value	871.62 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1184 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	296 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.010952 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002650 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		21-11-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4598 lm	


LED Flux=5884lm LED Power=42W Eff=78% EfcLed=140lm/W EfcLum=87lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(17k)=102000h

C.I.E.	99 100 100 33 100	D DIN 5040	D62
F UTE	--	B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.65	0.98	1.30	1.63	OC	0.33	0.65	0.98	1.30	1.63
OB	0.33	0.65	0.98	1.30	1.63	OD	0.33	0.65	0.98	1.30	1.63

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	4007.72	3722.97	2448.10	872.74	148.38	29.89	3.51	0.49	0.00	0.00
OB	4007.72	3722.97	2448.10	872.74	148.38	29.89	3.51	0.49	0.00	0.00
OC	4007.72	3722.97	2448.10	872.74	148.38	29.89	3.51	0.49	0.00	0.00
OD	4007.72	3722.97	2448.10	872.74	148.38	29.89	3.51	0.49	0.00	0.00

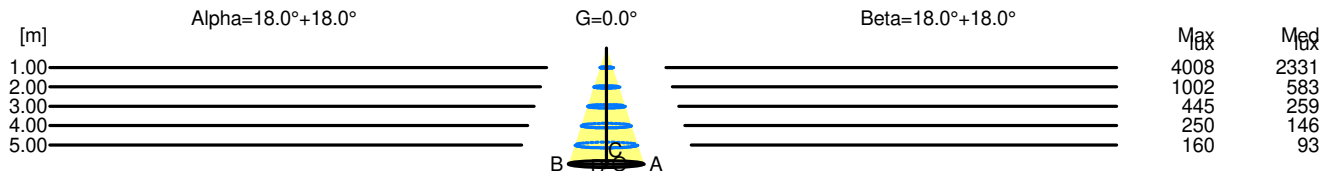

H[m]	D[m]	Max lux	Med lux	Alpha=18.0°+18.0°	G=0.0
1.00	0.65	4008	2331		
2.00	1.30	1002	583		
3.00	1.95	445	259		
4.00	2.60	250	146		
5.00	3.25	160	93		

H[m]	D[m]	Max lux	Med lux	Beta=18.0°+18.0°	G=0.0
1.00	0.65	4008	2331		
2.00	1.30	1002	583		
3.00	1.95	445	259		
4.00	2.60	250	146		
5.00	3.25	160	93		