


Luminaire

Code BH22005+BH16201
 Name A.39 RCS TRIM SHARP 2368 LB S 930 SLV + 4X4 OPT. LB WHITE

Measurem.

Code FTS1900721
 Name A.39 RCS TRIM SHARP 2368 LB S 930 SLV + 4X4 OPT. LB WHITE

Luminaire Flux	3296.83 lm	Luminaire Power	44.00 W	Efficacy	74.93 lm/W	Efficiency	100.00%
Sources Flux	3296.83 lm	Maximum value	5541.55 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	2368 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	592 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area	0.021904 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.005299 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	21-02-2017			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	3296.83 lm		
LED Flux=4352,8lm LED Power=44W Eff=76% EfcLed=99lm/W EfcLum=75lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

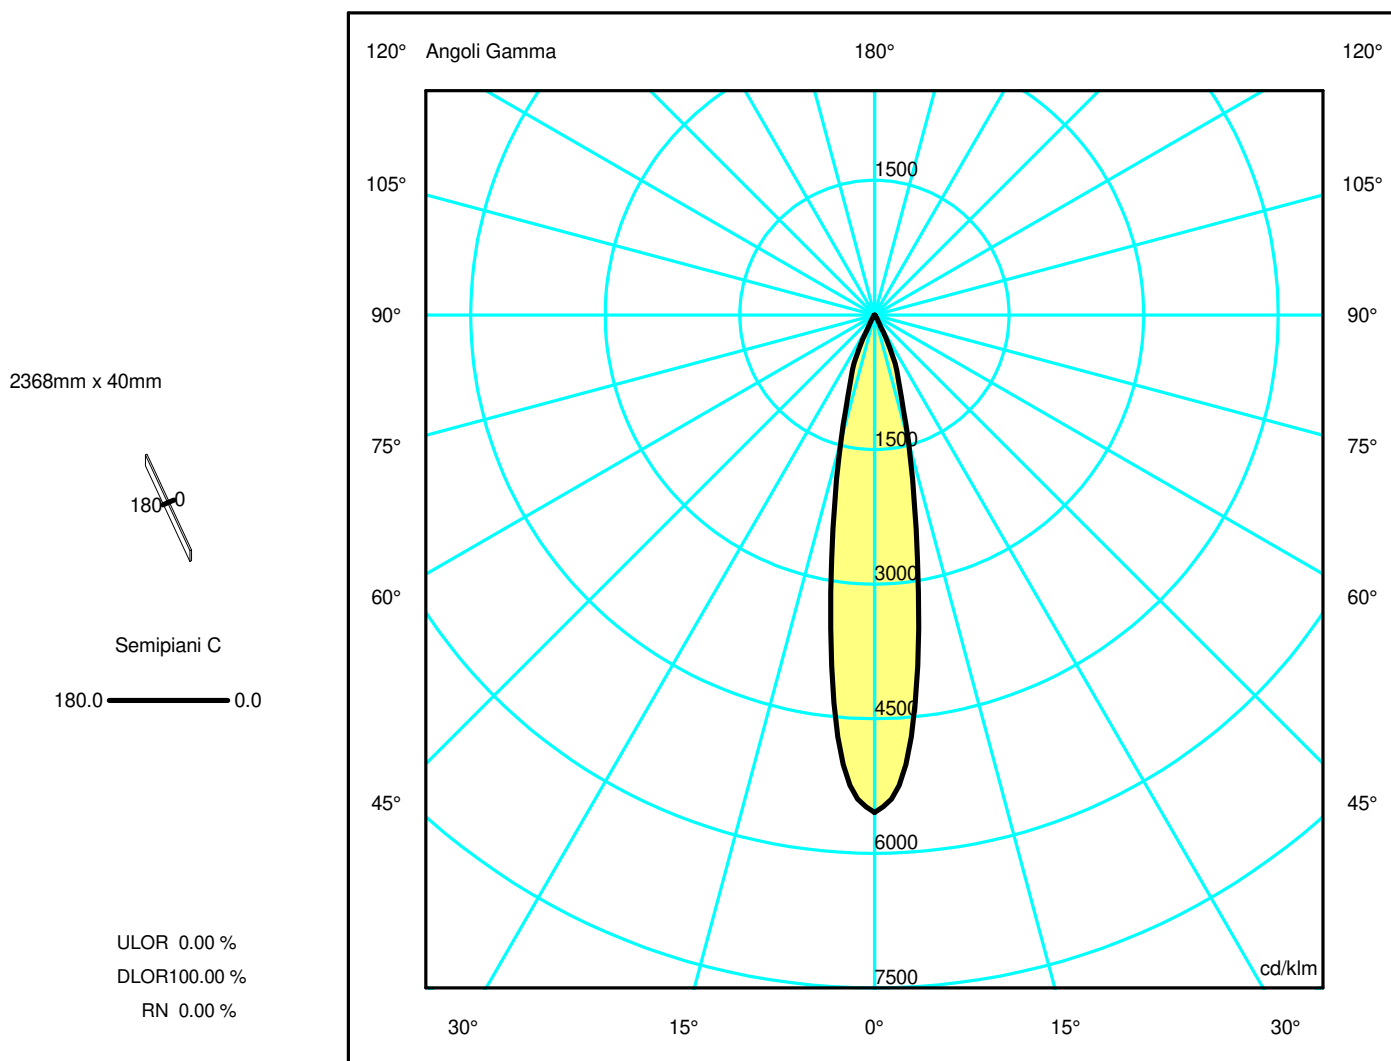

Luminaire

Code BH22005+BH16201
Name A.39 RCS TRIM SHARP 2368 LB S 930 SLV + 4X4 OPT. LB WHITE

Measurerm.


Code FTS1900721
Name A.39 RCS TRIM SHARP 2368 LB S 930 SLV + 4X4 OPT. LB WHITE

Luminaire Flux	3296.83 lm	Luminaire Power	44.00 W	Efficacy	74.93 lm/W	Efficiency	100.00%
Sources Flux	3296.83 lm	Maximum value	5541.55 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	2368 mm	Width	40 mm	Height	111 mm	
Rectangular Luminous Area	Length	592 mm	Width	37 mm	Height	0 mm	
Horizontal Luminous Area	0.021904 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2	Emitting area on Plane 90°	0.005299 m2
Coordinate system	CG	Symmetry Type	Rotosymmetrical	Date	21-02-2017	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	3296.83 lm	LED Flux=4352,8lm LED Power=44W Eff=76% EfcLed=99lm/W EfcLum=75lm/W Ra=90 SDCM=2 L90(20K)=118000h			
C.I.E.	99 100 100 100 100	D DIN 5040	A60				
F UTE	--	B NBN	BZ 1				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.35	0.53	0.70	0.88	OC	0.18	0.35	0.53	0.70	0.88
OB	0.18	0.35	0.53	0.70	0.88	OD	0.18	0.35	0.53	0.70	0.88

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	18269.56	15547.46	4796.57	1311.47	82.29	23.22	8.07	5.17	3.66	1.73
OB	18269.56	15547.46	4796.57	1311.47	82.29	23.22	8.07	5.17	3.66	1.73
OC	18269.56	15547.46	4796.57	1311.47	82.29	23.22	8.07	5.17	3.66	1.73
OD	18269.56	15547.46	4796.57	1311.47	82.29	23.22	8.07	5.17	3.66	1.73

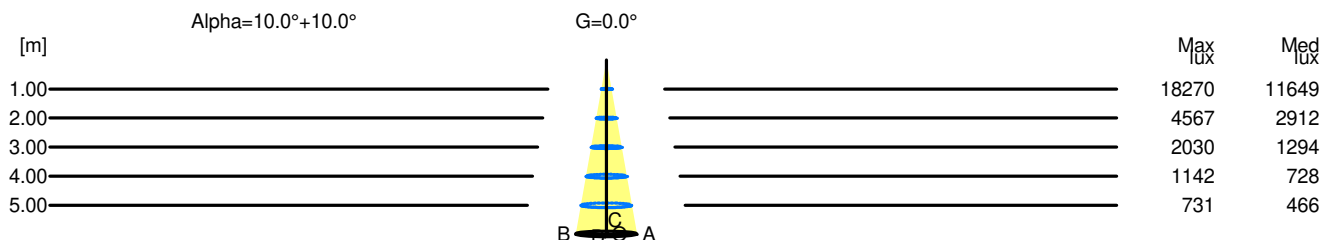

H[m]	D[m]	Max lux	Med lux	Alpha=10.0°+10.0°	G=0.0
1.00	0.35	18270	11649		
2.00	0.70	4567	2912		
3.00	1.05	2030	1294		
4.00	1.41	1142	728		
5.00	1.76	731	466		