

## Luminaire


Code BH22105+BH16201  
 Name A.39 RCS TRIM SHARP 2368 LB S 940 SLV + 4X4 OPT. LB WHITE

## Measurem.

Code FTS1900733  
 Name A.39 RCS TRIM SHARP 2368 LB S 940 SLV + 4X4 OPT. LB WHITE

Luminaire Flux	3528.13 lm	Luminaire Power	44.00 W	Efficacy	80.18 lm/W	Efficiency	100.00%
Sources Flux	3528.13 lm	Maximum value	5541.55 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire	Length	2368 mm	Width	40 mm	Height	111 mm	
Rectangular Luminous Area	Length	592 mm	Width	37 mm	Height	0 mm	
Horizontal Luminous Area	0.021904 m <sup>2</sup>	Emitting area on Plane 180°	0.000000 m <sup>2</sup>	Emitting area on Plane 270°	0.000000 m <sup>2</sup>	Emitting area on Plane 90°	0.005299 m <sup>2</sup>
Coordinate system	CG	Symmetry Type	Rotosymmetrical		Maximum Gamma Angle	180	
Date	21-02-2017	Measurement Flux	3528.13 lm				
Measurement Distance	0.00						
LED Flux=4658,2lm LED Power=44W Eff=76% EfcLed=106lm/W EfcLum=80lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99 100 100 100 100	D DIN 5040	A60				
F UTE	--	B NBN	BZ 1				


2368mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

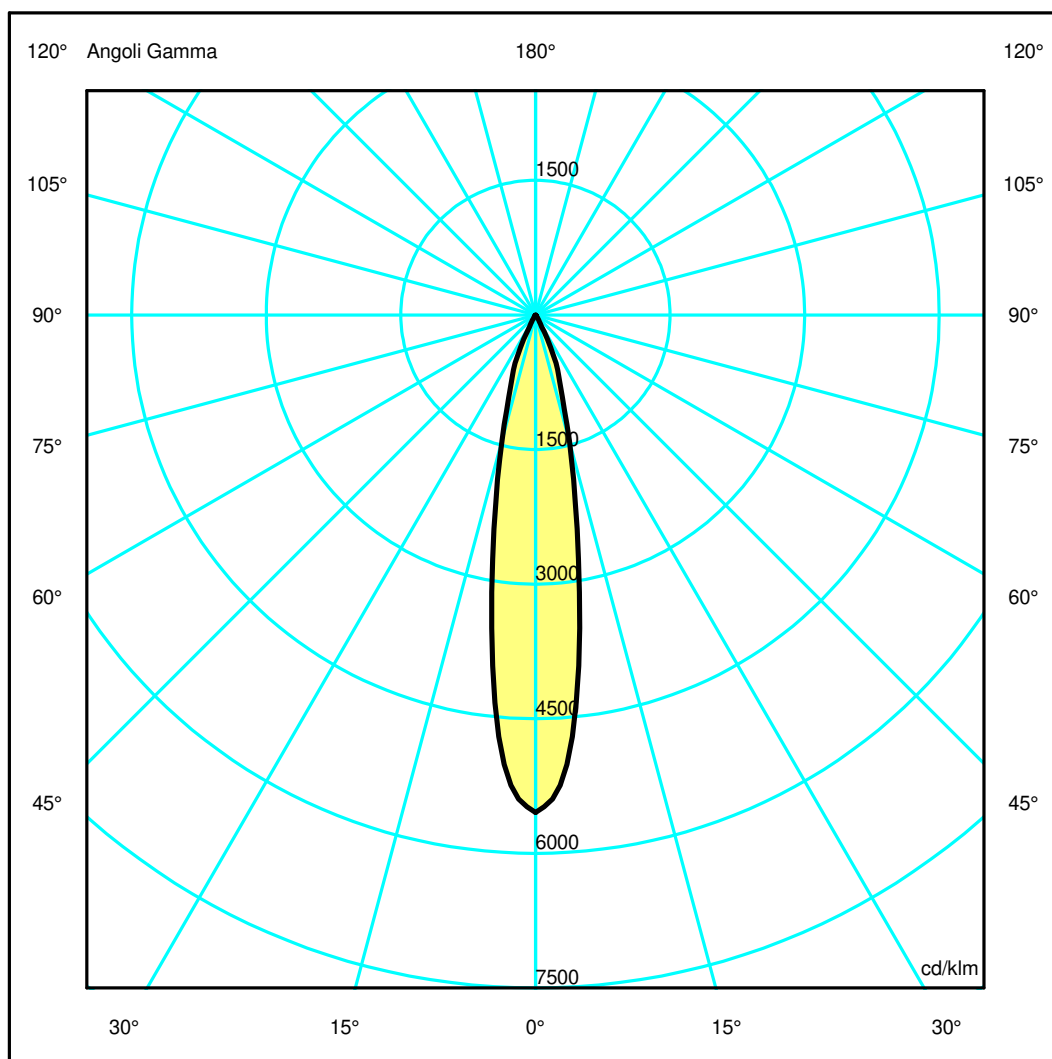

## Luminaire

Code BH22105+BH16201  
Name A.39 RCS TRIM SHARP 2368 LB S 940 SLV + 4X4 OPT. LB WHITE

## Measurem.

Code FTS1900733  
Name A.39 RCS TRIM SHARP 2368 LB S 940 SLV + 4X4 OPT. LB WHITE

Luminaire Flux	3528.13 lm	Luminaire Power	44.00 W	Efficacy	80.18 lm/W	Efficiency	100.00%
Sources Flux	3528.13 lm	Maximum value	5541.55 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	2368 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	592 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area	0.021904 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.005299 m2		
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle	180	Measurement Distance	3528.13 lm
Date	21-02-2017	Measurement Flux					
Measurement Distance	0.00						


LED Flux=4658,2lm LED Power=44W Eff=76% EfcLed=106lm/W EfcLum=80lm/W Ra=90 SDCM=2 L90(20K)=118000h

C.I.E.	99 100 100 100 100	D DIN 5040	A60
F UTE	--	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.35	0.53	0.70	0.88	OC	0.18	0.35	0.53	0.70	0.88
OB	0.18	0.35	0.53	0.70	0.88	OD	0.18	0.35	0.53	0.70	0.88

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	19551.32	16638.25	5133.09	1403.48	88.06	24.84	8.64	5.53	3.92	1.85
OB	19551.32	16638.25	5133.09	1403.48	88.06	24.84	8.64	5.53	3.92	1.85
OC	19551.32	16638.25	5133.09	1403.48	88.06	24.84	8.64	5.53	3.92	1.85
OD	19551.32	16638.25	5133.09	1403.48	88.06	24.84	8.64	5.53	3.92	1.85

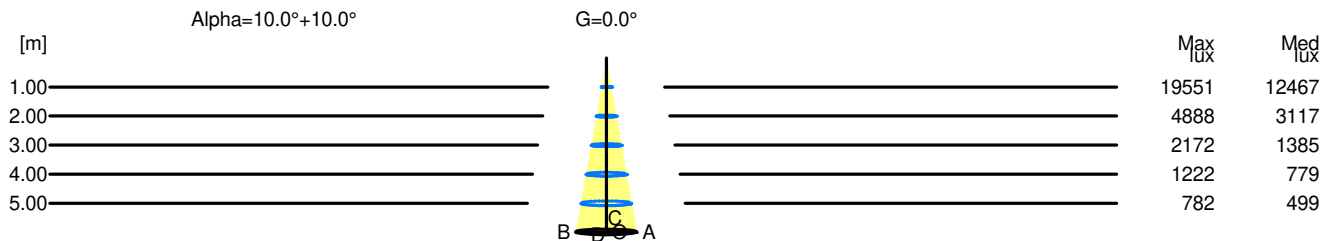

H[m]	D[m]	Max lux	Med lux	Alpha=10.0°+10.0°	G=0.0
1.00	0.35	19551	12467		
2.00	0.70	4888	3117		
3.00	1.05	2172	1385		
4.00	1.41	1222	779		
5.00	1.76	782	499		