


Luminaire

Code BH23105+BH16301
 Name A.39 RCS TRIM SHARP 2368 HB S 940 SLV + 6X4 OPT. HB WHITE

Measurement

Code FTS1900757
 Name A.39 RCS TRIM SHARP 2368 HB S 940 SLV + 6X4 OPT. HB WHITE

Luminaire Flux	5292.46 lm	Luminaire Power	66.00 W	Efficacy	80.19 lm/W	Efficiency	100.00%
Sources Flux	5292.46 lm	Maximum value	5541.55 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	2368 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	888 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.032856 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007949 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5292.46 lm	
LED Flux=6987,3lm LED Power=66W Eff=76% EfcLed=106lm/W EfcLum=80lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

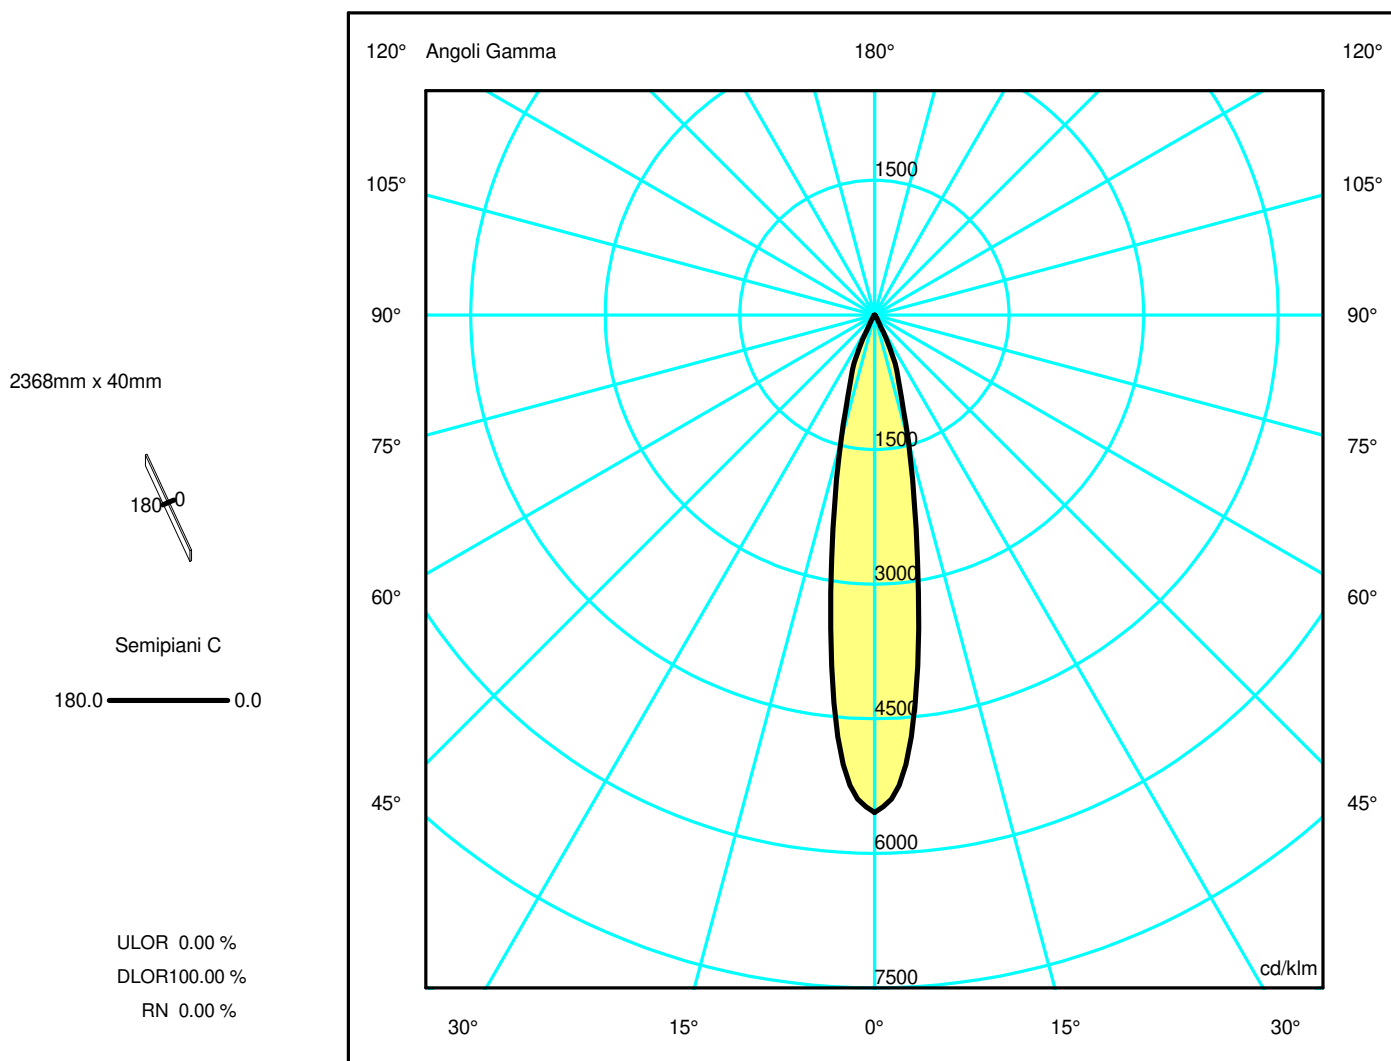

Luminaire

Code BH23105+BH16301
Name A.39 RCS TRIM SHARP 2368 HB S 940 SLV + 6X4 OPT. HB WHITE

Measurerm.


Code FTS1900757
Name A.39 RCS TRIM SHARP 2368 HB S 940 SLV + 6X4 OPT. HB WHITE

Luminaire Flux	5292.46 lm	Luminaire Power	66.00 W	Efficacy	80.19 lm/W	Efficiency	100.00%
Sources Flux	5292.46 lm	Maximum value	5541.55 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	2368 mm	Width	40 mm	Height	111 mm
Rectangular Luminous Area		Length	888 mm	Width	37 mm	Height	0 mm
Horizontal Luminous Area		0.032856 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007949 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-02-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5292.46 lm	
LED Flux=6987,3lm LED Power=66W Eff=76% EfcLed=106lm/W EfcLum=80lm/W Ra=90 SDCM=2 L90(20K)=118000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.35	0.53	0.70	0.88	OC	0.18	0.35	0.53	0.70	0.88
OB	0.18	0.35	0.53	0.70	0.88	OD	0.18	0.35	0.53	0.70	0.88

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	29328.45	24958.62	7700.03	2105.33	132.10	37.27	12.96	8.30	5.88	2.77
OB	29328.45	24958.62	7700.03	2105.33	132.10	37.27	12.96	8.30	5.88	2.77
OC	29328.45	24958.62	7700.03	2105.33	132.10	37.27	12.96	8.30	5.88	2.77
OD	29328.45	24958.62	7700.03	2105.33	132.10	37.27	12.96	8.30	5.88	2.77

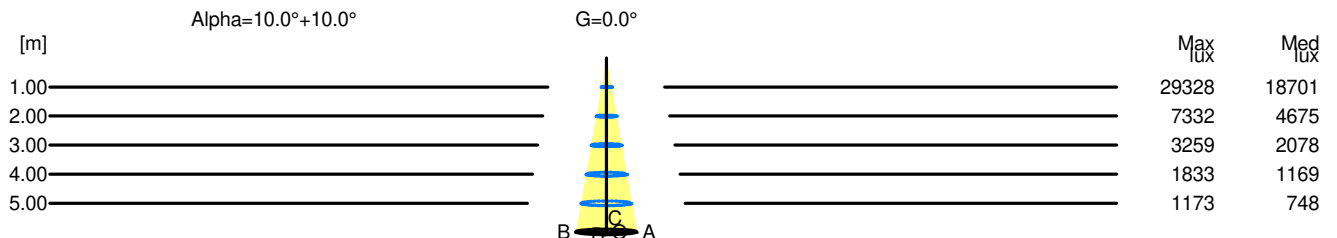

H[m]	D[m]	Max lux	Med lux	Alpha=10.0°+10.0°	G=0.0
1.00	0.35	29328	18701		
2.00	0.70	7332	4675		
3.00	1.05	3259	2078		
4.00	1.41	1833	1169		
5.00	1.76	1173	748		