


Luminaire

Code BL30401
Name HOY MODULO SPOT 3000K FL L=384 DALI BCO

Measurem.

Code FTS2000644
Name HOY MODULO SPOT 3000K FL L=384 DALI BCO

Luminaire Flux	1895.91 lm	Luminaire Power	22.00 W	Efficacy	86.18 lm/W	Efficiency	100.00%
Lamps Flux	1895.91 lm	Maximum value	3096.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 90 mm Diam. 69 mm	Height	188 mm	Height	0 mm		
Horizontal Luminous Area	0.003739 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Glare area at 76°	0.000905 m2				
Emitting area on Plane 90°	0.000000 m2						
Coordinate system	CG	Symmetry Type	Rotosymmetrical				
Date	22-11-2019	Maximum Gamma Angle	180				
Measurement Distance	0.00	Measurement Flux	1895.91 lm				
LED Flux=2427.9lm LED Power=19W Eff=78% EfcLed=128lm/W EfcLum=86lm/W CCT=3000K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	98 100 100 100 100	D DIN 5040	A60				
F UTE	--	B NBN	BZ 1				

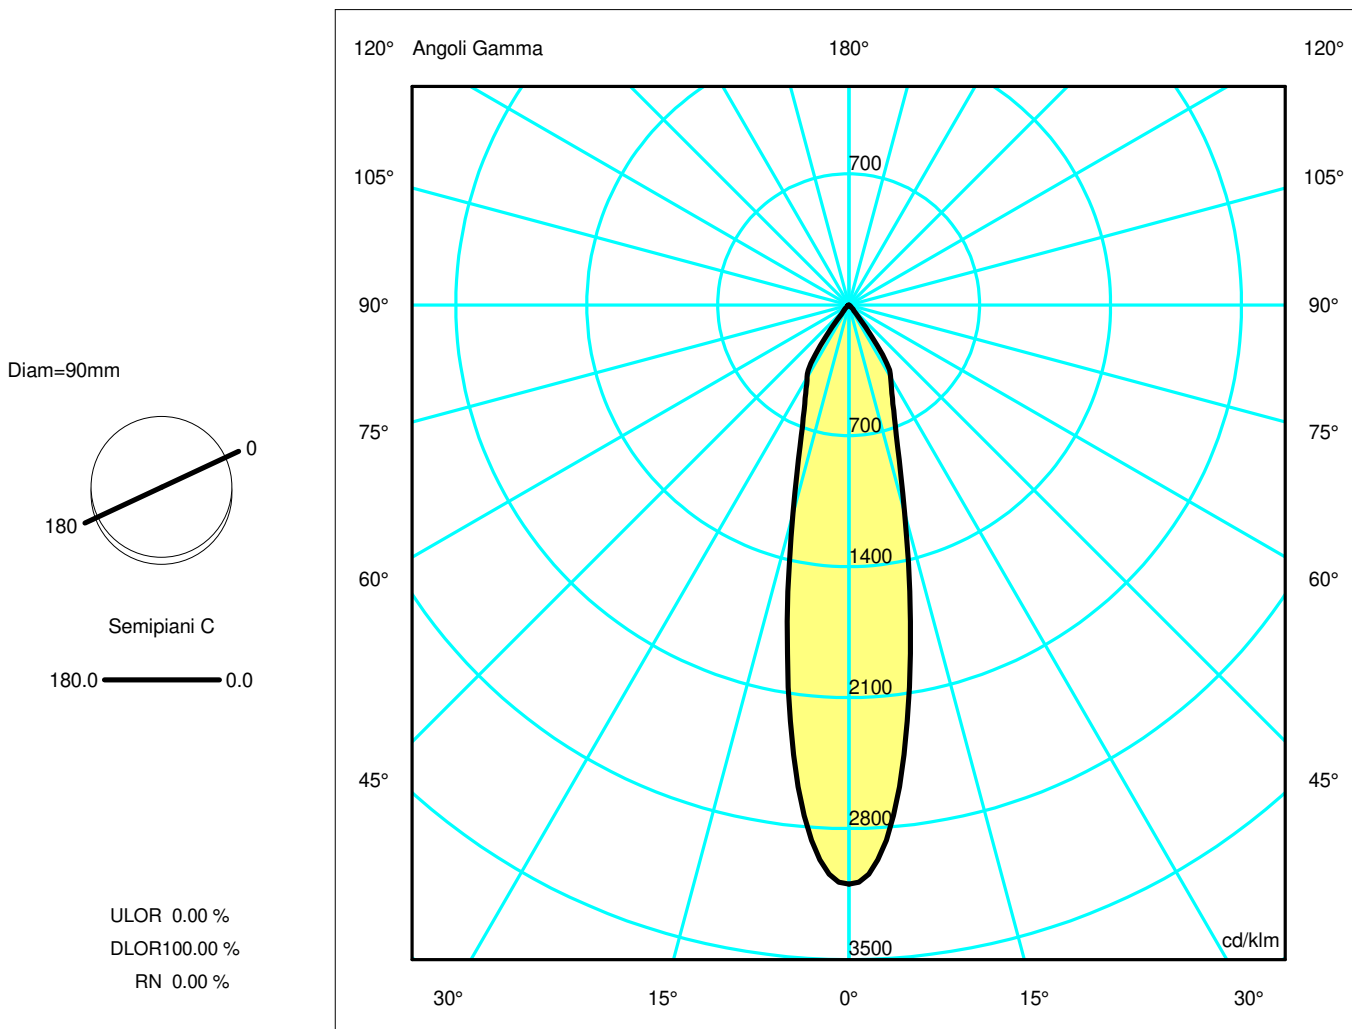

Luminaire

Code BL30401
Name HOY MODULO SPOT 3000K FL L=384 DALI BCO

Measur.


Code FTS2000644
Name HOY MODULO SPOT 3000K FL L=384 DALI BCO

Luminaire Flux	1895.91 lm	Luminaire Power	22.00 W	Efficacy	86.18 lm/W	Efficiency	100.00%
Lamps Flux	1895.91 lm	Maximum value	3096.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	90 mm 69 mm	Height Height	188 mm 0 mm		
Horizontal Luminous Area		0.003739 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000905 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		22-11-2019		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1895.91 lm	
LED Flux=2427.9lm LED Power=19W Eff=78% EfcLed=128lm/W EfcLum=86lm/W CCT=3000K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.43	0.64	0.86	1.07	OC	0.21	0.43	0.64	0.86	1.07
OB	0.21	0.43	0.64	0.86	1.07	OD	0.21	0.43	0.64	0.86	1.07

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	5870.01	5193.88	2188.50	1044.88	501.84	45.30	10.80	5.27	1.54	0.43
OB	5870.01	5193.88	2188.50	1044.88	501.84	45.30	10.80	5.27	1.54	0.43
OC	5870.01	5193.88	2188.50	1044.88	501.84	45.30	10.80	5.27	1.54	0.43
OD	5870.01	5193.88	2188.50	1044.88	501.84	45.30	10.80	5.27	1.54	0.43

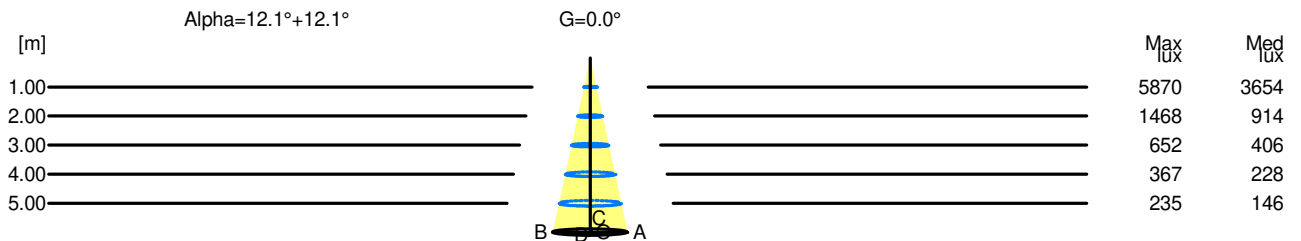

H[m]	D[m]	Max lux	Med lux	Alpha=12.1°+12.1°	G=0.0
1.00	0.43	5870	3654		
2.00	0.86	1468	914		
3.00	1.29	652	406		
4.00	1.72	367	228		
5.00	2.15	235	146		