

Luminaire

Code BM03300
Name HOY SPOT INCASSO 2700K FL

Measurem.

Code FTS2000372
Name HOY SPOT INCASSO 2700K FL


Luminaire Flux	1770.58 lm	Luminaire Power	19.00 W	Efficacy	93.19 lm/W	Efficiency	100.00%
Lamps Flux	1770.58 lm	Maximum value	3096.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 90 mm Diam. 69 mm	Height	188 mm	Height	0 mm		
Horizontal Luminous Area	0.003739 m2	Emitting area on Plane 180°	0.000000 m2				
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2				
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°	0.000905 m2				
Coordinate system	CG	Symmetry Type	Rotosymmetrical				
Date	22-11-2019	Maximum Gamma Angle	180				
Measurement Distance	0.00	Measurement Flux	1770.58 lm				

LED Flux=2267.4lm LED Power=19W Eff=78% EfcLed=119lm/W EfcLum=93lm/W CCT=2700K Ra=90 SDCM=2 L70(6K)=50000h

C.I.E. 98 100 100 100 100
F UTE --

D DIN 5040
B NBN
A60
BZ 1


Diam=90mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

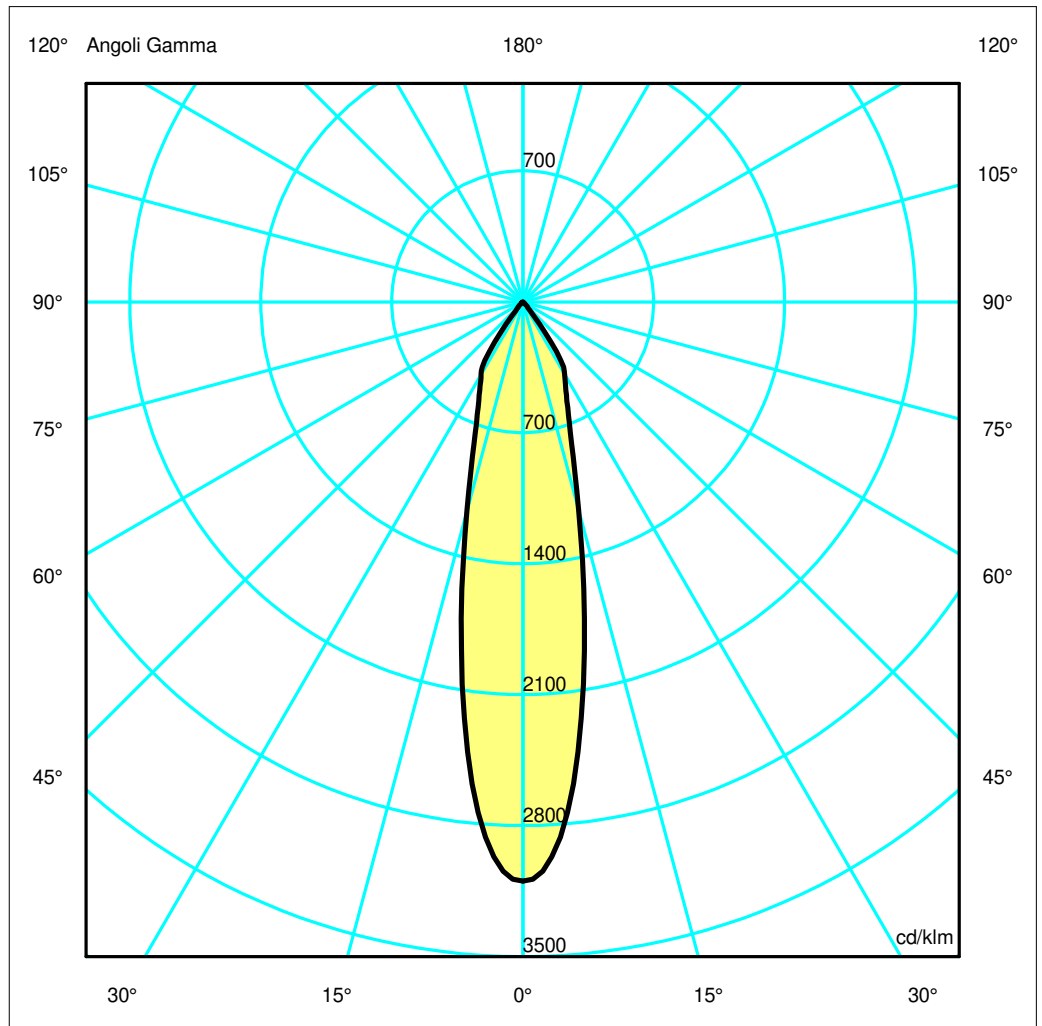

Luminaire

Code BM03300
Name HOY SPOT INCASSO 2700K FL

Measur.


Code FTS2000372
Name HOY SPOT INCASSO 2700K FL

Luminaire Flux	1770.58 lm	Luminaire Power	19.00 W	Efficacy	93.19 lm/W	Efficiency	100.00%
Lamps Flux	1770.58 lm	Maximum value	3096.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	90 mm 69 mm	Height Height	188 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.003739 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000905 m2	
Coordinate system Date Measurement Distance		CG 22-11-2019 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1770.58 lm	
LED Flux=2267.4lm LED Power=19W Eff=78% EfcLed=119lm/W EfcLum=93lm/W CCT=2700K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E. F UTE	98 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.43	0.64	0.86	1.07	OC	0.21	0.43	0.64	0.86	1.07
OB	0.21	0.43	0.64	0.86	1.07	OD	0.21	0.43	0.64	0.86	1.07

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40
OB	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40
OC	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40
OD	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40

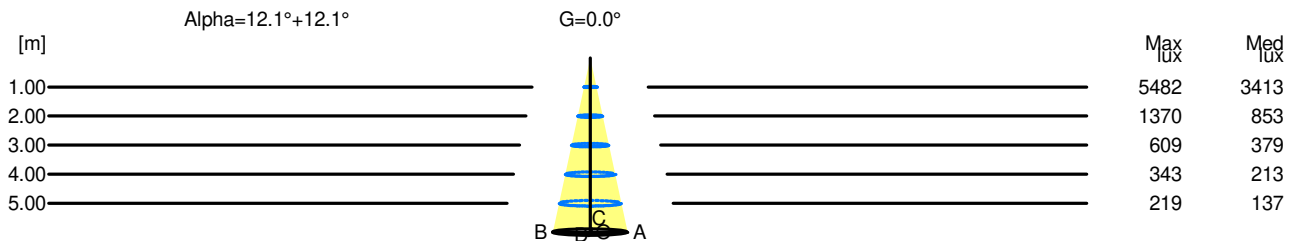

H[m]	D[m]	Max lux	Med lux	Alpha=12.1°+12.1°	G=0.0
1.00	0.43	5482	3413		
2.00	0.86	1370	853		
3.00	1.29	609	379		
4.00	1.72	343	213		
5.00	2.15	219	137		