


Luminaire

Code BM10901
Name HOY SPOT PLAF ORIENT 2700K FL DALI BCO

Measurerm.

Code FTS2000267
Name HOY SPOT PLAF ORIENT 2700K FL DALI BCO

Luminaire Flux	1770.58 lm	Luminaire Power	22.00 W	Efficacy	80.48 lm/W	Efficiency	100.00%
Lamps Flux	1770.58 lm	Maximum value	3096.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 90 mm Diam. 69 mm	Height	188 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.003739 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°			0.000000 m2 0.000000 m2 0.000905 m2		
Coordinate system	CG	Symmetry Type			Rotosymmetrical		
Date	22-11-2019	Maximum Gamma Angle			180		
Measurement Distance	0.00	Measurement Flux			1770.58 lm		
LED Flux=2267.4lm LED Power=19W Eff=78% EfcLed=119lm/W EfcLum=80lm/W CCT=2700K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	98 100 100 100 100	D DIN 5040			A60		
F UTE	--	B NBN			BZ 1		

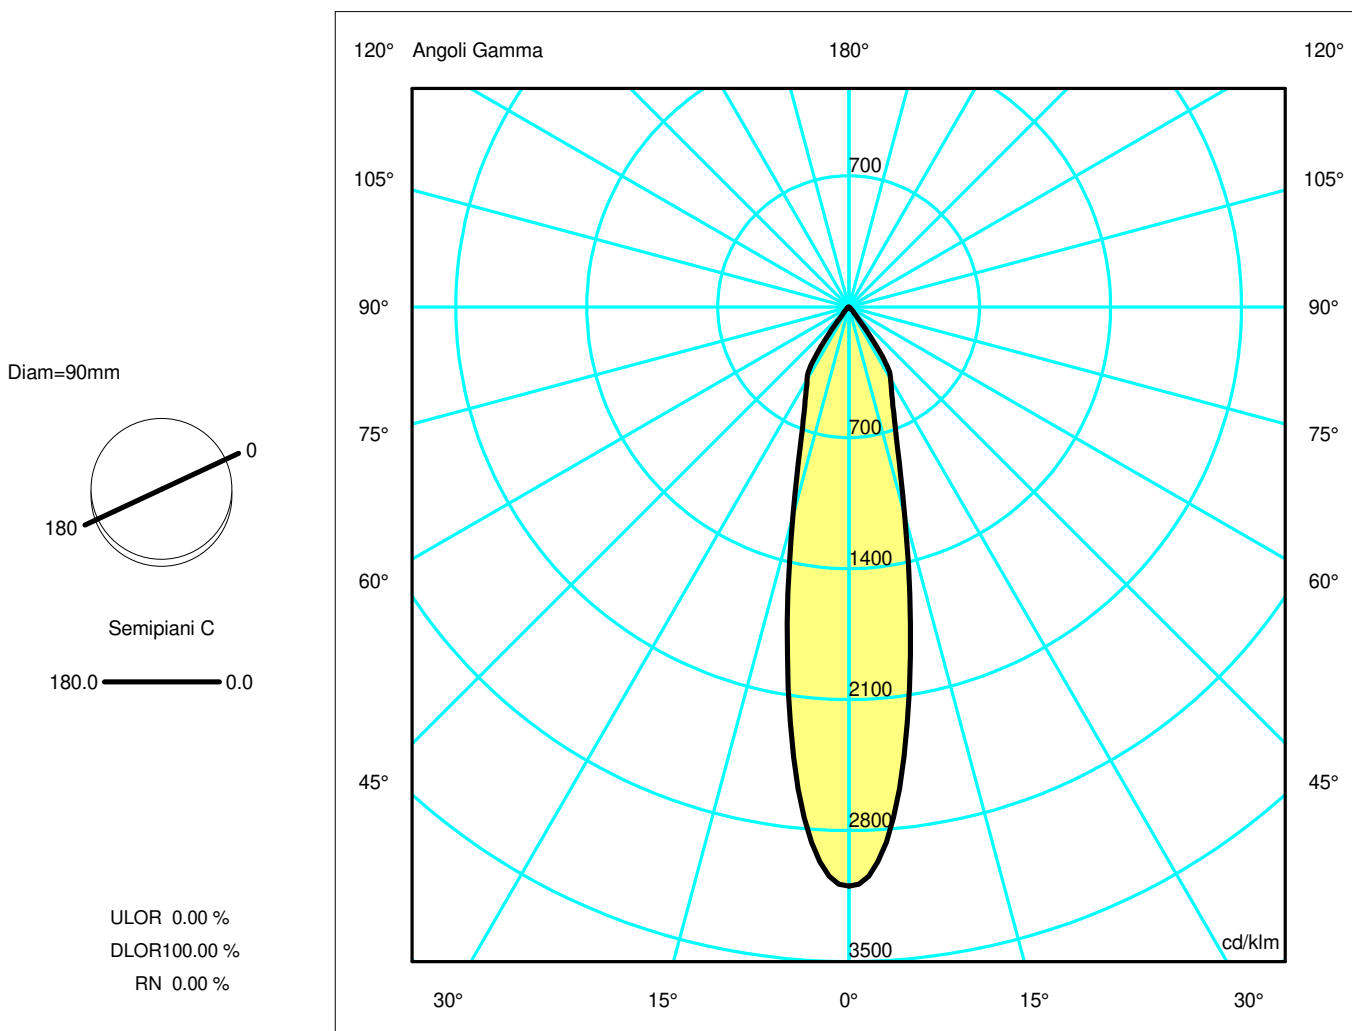

Luminaire

Code BM10901
Name HOY SPOT PLAF ORIENT 2700K FL DALI BCO

Measur.


Code FTS2000267
Name HOY SPOT PLAF ORIENT 2700K FL DALI BCO

Luminaire Flux	1770.58 lm	Luminaire Power	22.00 W	Efficacy	80.48 lm/W	Efficiency	100.00%
Lamps Flux	1770.58 lm	Maximum value	3096.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	90 mm 69 mm	Height Height	188 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.003739 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000905 m2	
Coordinate system Date Measurement Distance		CG 22-11-2019 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 1770.58 lm	
LED Flux=2267.4lm LED Power=19W Eff=78% EfcLed=119lm/W EfcLum=80lm/W CCT=2700K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E. F UTE	98 100 100 100 100 --			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.43	0.64	0.86	1.07	OC	0.21	0.43	0.64	0.86	1.07
OB	0.21	0.43	0.64	0.86	1.07	OD	0.21	0.43	0.64	0.86	1.07

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40
OB	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40
OC	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40
OD	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40

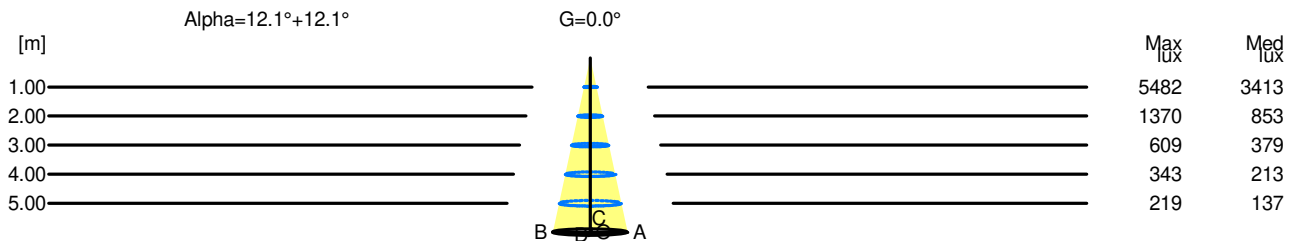

H[m]	D[m]	Max lux	Med lux	Alpha=12.1°+12.1°	G=0.0
1.00	0.43	5482	3413		
2.00	0.86	1370	853		
3.00	1.29	609	379		
4.00	1.72	343	213		
5.00	2.15	219	137		