


Luminaire

Code BM21201
Name HOY SPOT BIN OR 2700K FL DALI BCO OTK

Measurem.

Code FTS2000660
Name HOY SPOT BIN OR 2700K FL DALI BCO OTK

Luminaire Flux	1770.58 lm	Luminaire Power	22.00 W	Efficacy	80.48 lm/W	Efficiency	100.00%
Lamps Flux	1770.58 lm	Maximum value	3096.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 90 mm Diam. 69 mm	Height	188 mm	Height	0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.003739 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000905 m2				
Coordinate system	CG	Symmetry Type	Rotosymmetrical				
Date	22-11-2019	Maximum Gamma Angle	180				
Measurement Distance	0.00	Measurement Flux	1770.58 lm				
LED Flux=2267.4lm LED Power=19W Eff=78% EfcLed=119lm/W EfcLum=80lm/W CCT=2700K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	98 100 100 100 100	D DIN 5040	A60				
F UTE	--	B NBN	BZ 1				

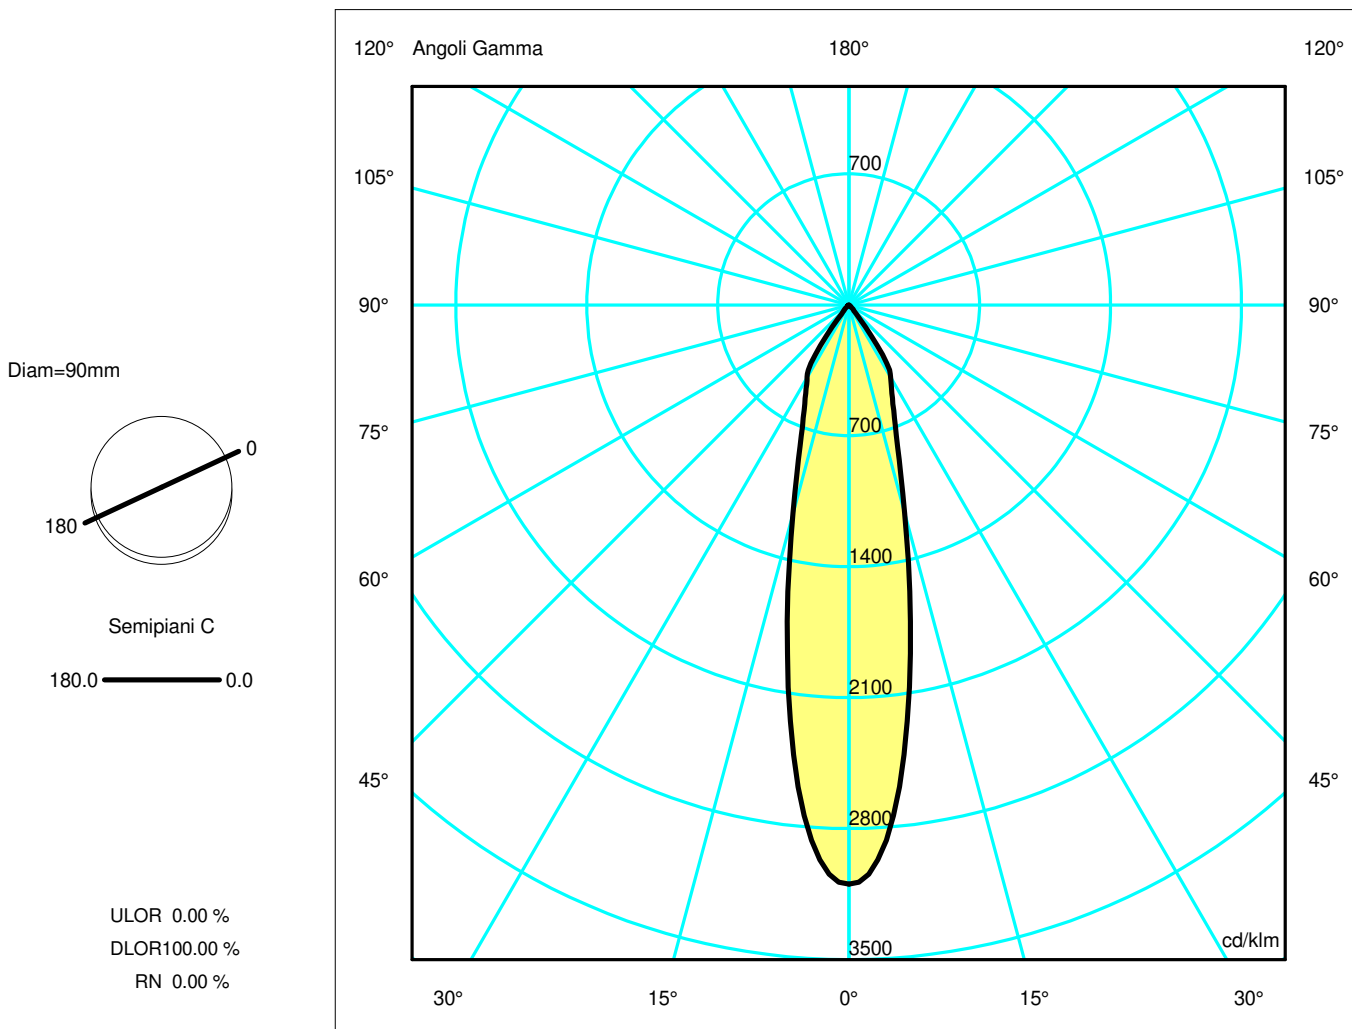

Luminaire

Code BM21201
Name HOY SPOT BIN OR 2700K FL DALI BCO OTK

Measur.


Code FTS2000660
Name HOY SPOT BIN OR 2700K FL DALI BCO OTK

Luminaire Flux	1770.58 lm	Luminaire Power	22.00 W	Efficacy	80.48 lm/W	Efficiency	100.00%
Lamps Flux	1770.58 lm	Maximum value	3096.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	90 mm	Height	188 mm		
Round Luminous Area		Diam.	69 mm	Height	0 mm		
Horizontal Luminous Area	0.003739 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.000905 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	22-11-2019			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	1770.58 lm		
LED Flux=2267.4lm LED Power=19W Eff=78% EfcLed=119lm/W EfcLum=80lm/W CCT=2700K Ra=90 SDCM=2 L70(6K)=50000h							
C.I.E.	98 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.43	0.64	0.86	1.07	OC	0.21	0.43	0.64	0.86	1.07
OB	0.21	0.43	0.64	0.86	1.07	OD	0.21	0.43	0.64	0.86	1.07

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40
OB	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40
OC	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40
OD	5481.97	4850.53	2043.83	975.81	468.67	42.31	10.08	4.92	1.44	0.40

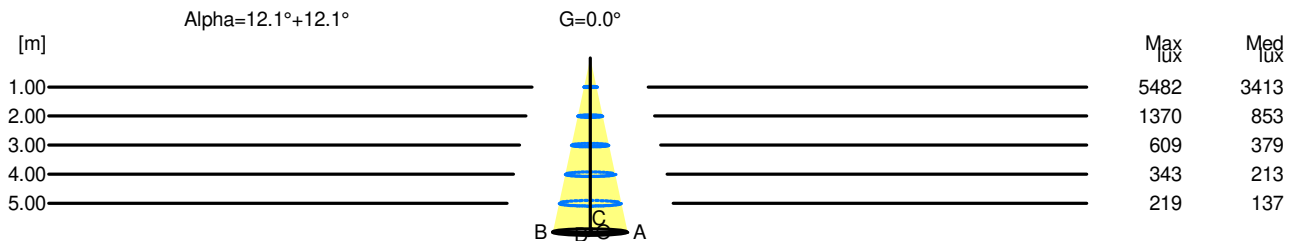

H[m]	D[m]	Max lux	Med lux	Alpha=12.1°+12.1°	G=0.0
1.00	0.43	5482	3413		
2.00	0.86	1370	853		
3.00	1.29	609	379		
4.00	1.72	343	213		
5.00	2.15	219	137		