

## Luminaire

Code BT06104\_N  
Name VECTOR 75 3P DALI8 TW SP BLK

## Measurerm.

Code FTS2300002  
Name VECTOR 75 3P DALI8 TW SP BLK


Luminaire Flux	1874 lm	Luminaire Power	26.0 W	Efficacy	72.070 lm/W	Efficiency	100.00%
Source Flux	1874 lm	Maximum value	9349.16 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	75 mm	Height	200 mm		
Round Luminous Area		Diam.	60 mm	Height	0 mm		
Horizontal Luminous Area			0.002827 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.000684 m2
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		15-12-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1874 lm	

LED Flux=2437lm LED Power=22W Eff=77% EfcLed=111lm/W EfcLum=72lm/W CCT=6500K Ra=90 R9=50 SDCM=3 L70(9K)=50000h

C.I.E. 100 100 100 100 100  
F UTE --

D DIN 5040  
B NBN  
A60  
BZ 1


Diam=75mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %

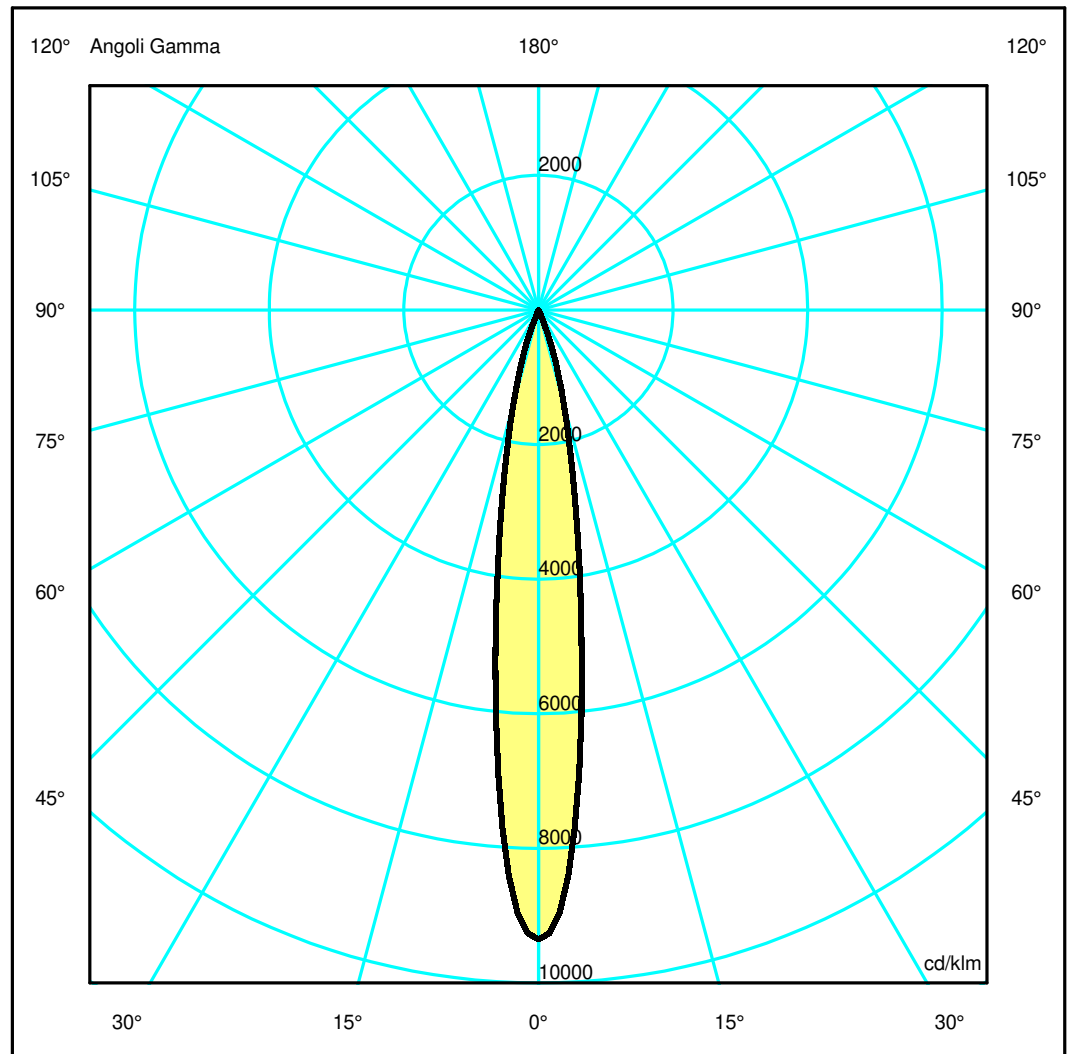

### Luminaire

Code BT06104\_N  
Name VECTOR 75 3P DALI8 TW SP BLK

### Measurment.

Code FTS2300002  
Name VECTOR 75 3P DALI8 TW SP BLK

Luminaire Flux 1874 lm Luminaire Power 26.0 W Efficacy 72.070 lm/W Efficiency 100.00%

Source Flux 1874 lm Maximum value 9349.16 cd/klm Position C=0.00 G=0.00 CG Rotosymmetrical

Round Luminaire	Diam.	75 mm	Height	200 mm
Round Luminous Area	Diam.	60 mm	Height	0 mm
Horizontal Luminous Area	0.002827 m2		Emitting area on Plane 180°	0.000000 m2
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.000684 m2

Coordinate system	CG	Symmetry Type	Rotosymmetrical
Date	15-12-2022	Maximum Gamma Angle	180
Measurement Distance	0.00	Measurement Flux	1874 lm

LED Flux=2437lm LED Power=22W Eff=77% EfcLed=111lm/W EfcLum=72lm/W CCT=6500K Ra=90 R9=50 SDCM=3 L70(9K)=50000h


C.I.E. 100 100 100 100 100  
F UTE --

D DIN 5040 B NBN  
A60 BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.14	0.27	0.41	0.55	0.69	OC	0.14	0.27	0.41	0.55	0.69
OB	0.14	0.27	0.41	0.55	0.69	OD	0.14	0.27	0.41	0.55	0.69

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	17518.54	12944.12	2729.49	48.07	7.27	1.72	0.97	0.70	0.50	0.30
OB	17518.54	12944.12	2729.49	48.07	7.27	1.72	0.97	0.70	0.50	0.30
OC	17518.54	12944.12	2729.49	48.07	7.27	1.72	0.97	0.70	0.50	0.30
OD	17518.54	12944.12	2729.49	48.07	7.27	1.72	0.97	0.70	0.50	0.30

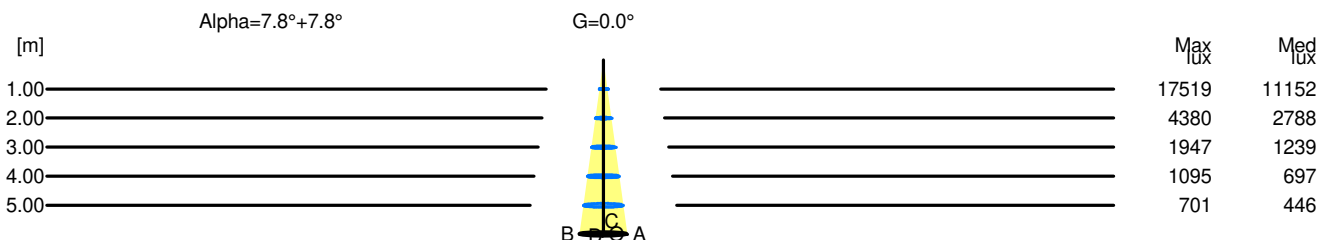

H[m]	D[m]	Max lux	Med lux	Alpha=7.8°+7.8°	G=0.0
1.00	0.27	17519	11152		
2.00	0.55	4380	2788		
3.00	0.82	1947	1239		
4.00	1.10	1095	697		
5.00	1.37	701	446		