

## Luminaire


Code BZ01801IN0+BZ06101  
 Name A.39 S/C SHARP REFR.DIR 2368 WIN ND BCO + A.39 S/C SHARP REFR KIT LOUVRES 2368 BCO

## Measurement

Code FTS2103037  
 Name A.39 S/C SHARP REFR.DIR 2368 WIN ND BCO + A.39 S/C SHARP REFR KIT LOUVRES 2368 BCO

Luminaire Flux	9266 lm	Luminaire Power	70.0 W	Efficacy	132.365 lm/W	Efficiency	100.00%
Source Flux	9266 lm	Maximum value	1168.42 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	2363 mm	Width	35 mm	Height	0 mm
Horizontal Luminous Area		0.082705 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.020008 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		14-12-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		9266 lm	
LED Flux=10279lm LED Power=62W Eff=90% EfcLed=165lm/W EfcLum=132lm/W CCT=5000 Ra=90 SDCM=3 L70(9K)=50000h							
C.I.E.	98	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	


2368mm x 45mm



Semipiani C

180.0 — 0.0  
 270.0 — 90.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

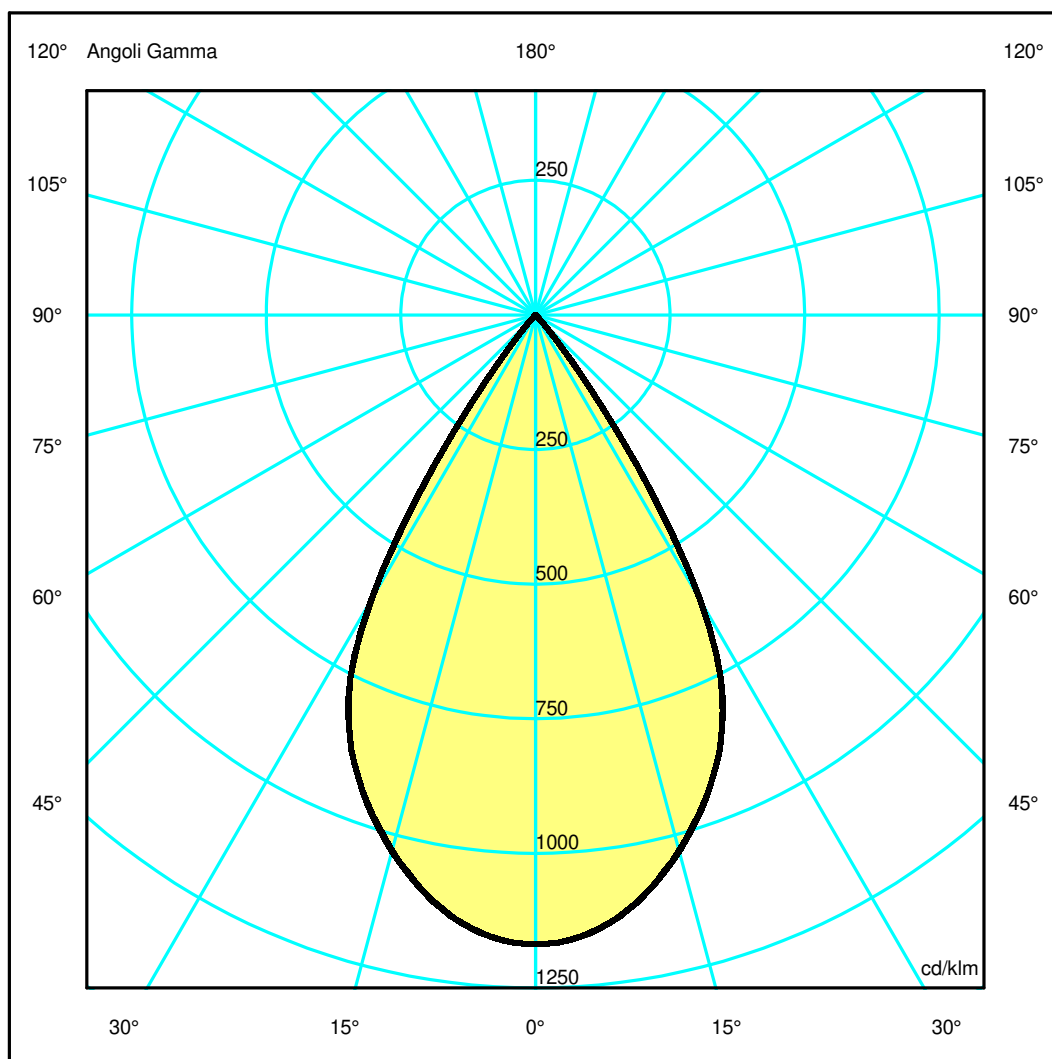

## Luminaire

Code BZ01801IN0+BZ06101  
 Name A.39 S/C SHARP REFR.DIR 2368 WIN ND BCO + A.39 S/C SHARP REFR KIT LOUVRES 2368 BCO

## Measurement

Code FTS2103037  
 Name A.39 S/C SHARP REFR.DIR 2368 WIN ND BCO + A.39 S/C SHARP REFR KIT LOUVRES 2368 BCO

Luminaire Flux	9266 lm	Luminaire Power	70.0 W	Efficacy	132.365 lm/W	Efficiency	100.00%
Source Flux	9266 lm	Maximum value	1168.42 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	45 mm	Height	85 mm
Rectangular Luminous Area		Length	2363 mm	Width	35 mm	Height	0 mm
Horizontal Luminous Area		0.082705 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.020008 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		14-12-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		9266 lm	


LED Flux=10279lm LED Power=62W Eff=90% EfcLed=165lm/W EfcLum=132lm/W CCT=5000 Ra=90 SDCM=3 L70(9K)=50000h

C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.59	1.17	1.76	2.35	2.94	OC	0.59	1.18	1.76	2.35	2.94
OB	0.59	1.17	1.76	2.35	2.94	OD	0.59	1.18	1.76	2.35	2.94

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	10826.03	10673.31	9560.76	7616.03	2470.35	83.37	17.15	3.76	2.39	1.79
OB	10826.03	10673.31	9560.76	7616.03	2470.35	83.37	17.15	3.76	2.39	1.79
OC	10826.03	10683.94	9539.77	7620.72	2457.09	80.99	18.18	4.00	2.50	1.82
OD	10826.03	10683.94	9539.77	7620.72	2457.09	80.99	18.18	4.00	2.50	1.82

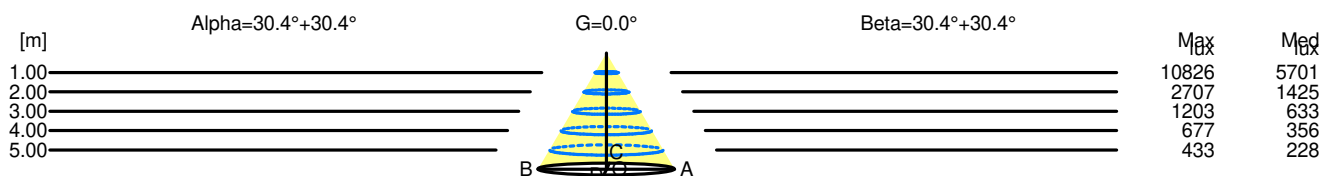

H[m]	D[m]	Max lux	Med lux	Alpha=30.4°+30.4°	G=0.0
1.00	1.17	10826	5701		
2.00	2.35	2707	1425		
3.00	3.52	1203	633		
4.00	4.70	677	356		
5.00	5.87	433	228		

H[m]	D[m]	Max lux	Med lux	Beta=30.4°+30.4°	G=0.0
1.00	1.18	10826	5701		
2.00	2.35	2707	1425		
3.00	3.53	1203	633		
4.00	4.70	677	356		
5.00	5.88	433	228		