

Luminaire

Code CA00201
Name GOPLE 60 SPOT TRK16 48V WF 2700K BCO

Measurum.

Code FTS2200085
Name GOPLE 60 SPOT TRK16 48V WF 2700K BCO

Luminaire Flux	503 lm	Luminaire Power	9.0 W	Efficacy	55.876 lm/W	Efficiency	100.00%
Source Flux	503 lm	Maximum value	3590.26 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area			0.000962 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.000233 m2
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		503 lm	
LED Flux=805lm LED Power=7.9W Eff=62% EfcLed=102lm/W EfcLum=56lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(6K)=50000h							
C.I.E.	98	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	


Diam=55mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

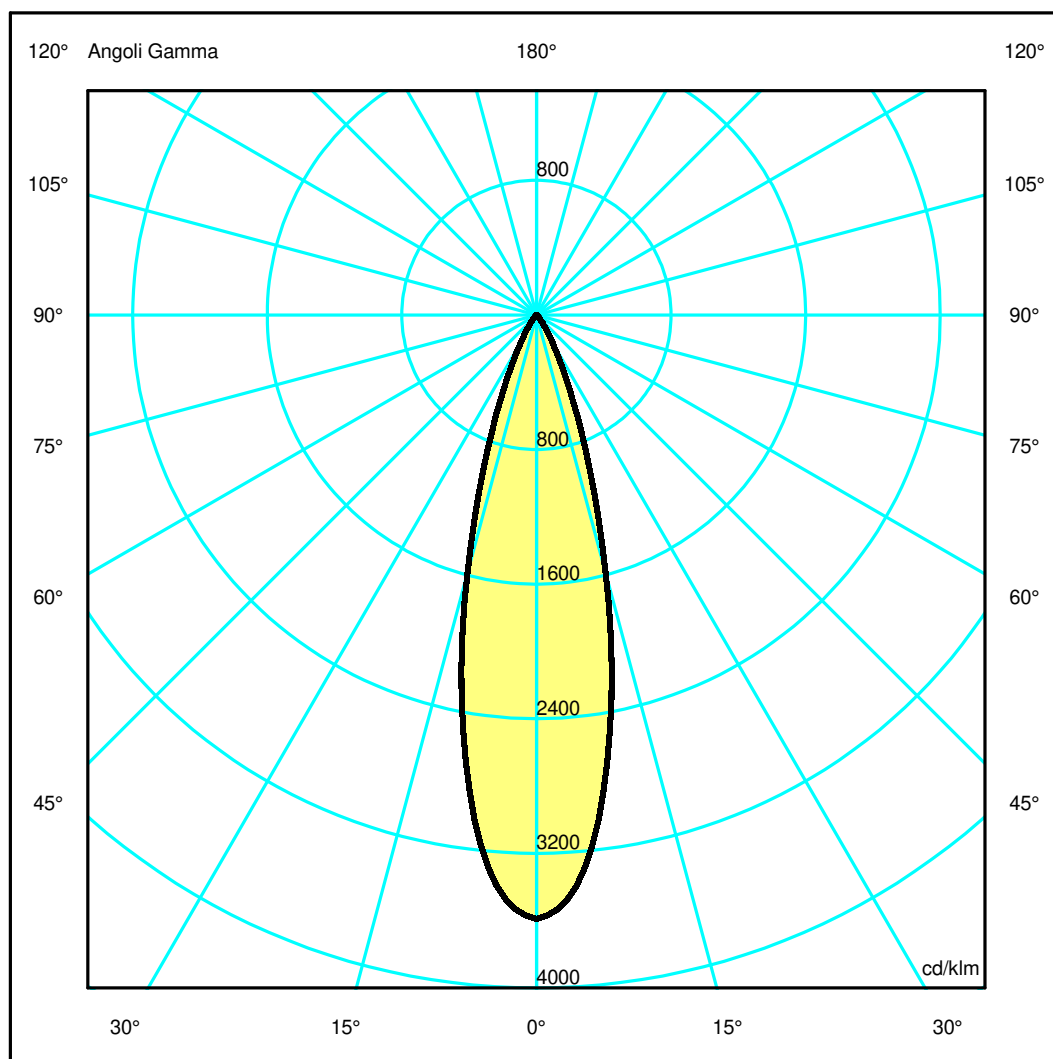

Luminaire

Code CA00201
Name GOPLE 60 SPOT TRK16 48V WF 2700K BCO

Measurment


Code FTS2200085
Name GOPLE 60 SPOT TRK16 48V WF 2700K BCO

Luminaire Flux	503 lm	Luminaire Power	9.0 W	Efficacy	55.876 lm/W	Efficiency	100.00%
Source Flux	503 lm	Maximum value	3590.26 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		503 lm	
LED Flux=805lm LED Power=7.9W Eff=62% EfcLed=102lm/W EfcLum=56lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(6K)=50000h							
C.I.E.	98 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.49	0.74	0.99	1.24	OC	0.25	0.49	0.74	0.99	1.24
OB	0.25	0.49	0.74	0.99	1.24	OD	0.25	0.49	0.74	0.99	1.24

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1805.47	1657.48	799.98	207.91	42.53	9.42	2.41	0.41	0.00	0.00
OB	1805.47	1657.48	799.98	207.91	42.53	9.42	2.41	0.41	0.00	0.00
OC	1805.47	1657.48	799.98	207.91	42.53	9.42	2.41	0.41	0.00	0.00
OD	1805.47	1657.48	799.98	207.91	42.53	9.42	2.41	0.41	0.00	0.00

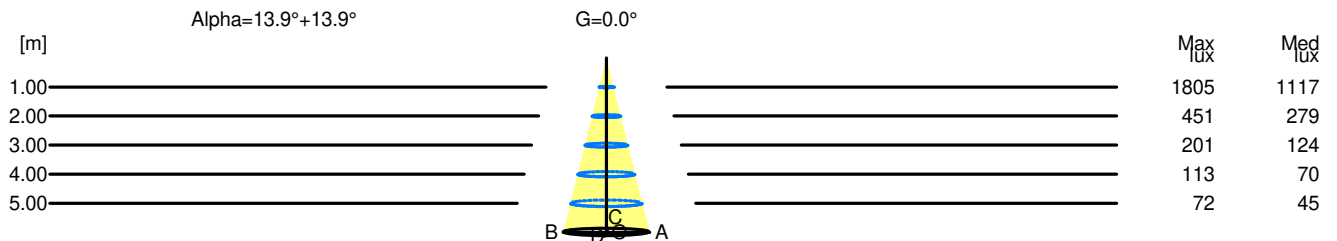

H[m]	D[m]	Max lux	Med lux	Alpha=13.9°+13.9°	G=0.0
1.00	0.49	1805	1117		
2.00	0.99	451	279		
3.00	1.48	201	124		
4.00	1.98	113	70		
5.00	2.47	72	45		