

## Luminaire

Code CA00201+AP90200  
 Name GOPLE 60 SPOT TRK16 48V WF 2700K BCO + VECTOR 40 - LENS FOR ELLIPTICAL EMISSION

## Measurement

Code FTS2200084  
 Name GOPLE 60 SPOT TRK16 48V WF 2700K BCO + VECTOR 40 - LENS FOR ELLIPTICAL EMISSION

Luminaire Flux	307 lm	Luminaire Power	9.0 W	Efficacy	34.132 lm/W	Efficiency	100.00%
Source Flux	307 lm	Maximum value	2688.01 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area			0.000962 m <sup>2</sup>	Emitting area on Plane 180°			0.000000 m <sup>2</sup>
Emitting area on Plane 0°			0.000000 m <sup>2</sup>	Emitting area on Plane 270°			0.000000 m <sup>2</sup>
Emitting area on Plane 90°			0.000000 m <sup>2</sup>	Glare area at 76°			0.000233 m <sup>2</sup>
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		07-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		307 lm	

LED Flux=805lm LED Power=7.9W Eff=38% EfcLed=102lm/W EfcLum=34lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(6K)=50000h

C.I.E. 95 99 100 100 100  
 F UTE 1.00 A

D DIN 5040  
 B NBN  
 A60  
 BZ 1



ULOR 0.00 %  
 DLOR100.00 %  
 RN 0.00 %



## Luminaire

Code CA00201+AP90200  
 Name GOPLE 60 SPOT TRK16 48V WF 2700K BCO + VECTOR 40 - LENS FOR ELLIPTICAL EMISSION

## Measurement

Code FTS2200084  
 Name GOPLE 60 SPOT TRK16 48V WF 2700K BCO + VECTOR 40 - LENS FOR ELLIPTICAL EMISSION

Luminaire Flux	307 lm	Luminaire Power	9.0 W	Efficacy	34.132 lm/W	Efficiency	100.00%
Source Flux	307 lm	Maximum value	2688.01 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		07-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		307 lm	


LED Flux=805lm LED Power=7.9W Eff=38% EfcLed=102lm/W EfcLum=34lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(6K)=50000h

C.I.E.	95 99 100 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.23	0.47	0.70	0.93	1.17	OC	0.34	0.68	1.02	1.36	1.70
OB	0.23	0.47	0.70	0.93	1.17	OD	0.34	0.68	1.02	1.36	1.70

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	825.73	746.58	334.03	87.30	20.53	5.48	1.76	1.03	0.64	0.21
OB	825.73	746.58	334.03	87.30	20.53	5.48	1.76	1.03	0.64	0.21
OC	825.73	783.68	524.48	256.85	95.47	25.63	11.82	6.40	1.34	0.23
OD	825.73	783.68	524.48	256.85	95.47	25.63	11.82	6.40	1.34	0.23

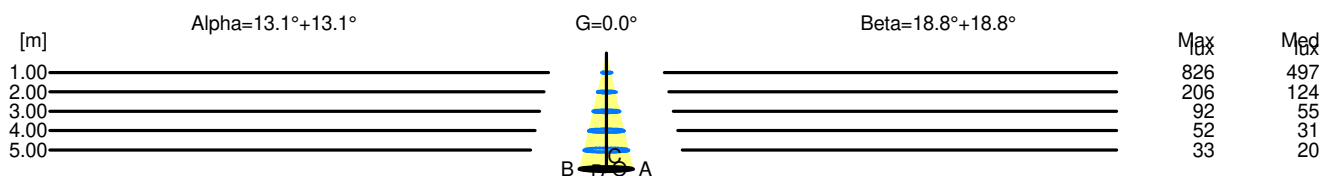

H[m]	D[m]	Max lux	Med lux	Alpha=13.1°+13.1°	G=0.0
1.00	0.47	826	497		
2.00	0.93	206	124		
3.00	1.40	92	55		
4.00	1.86	52	31		
5.00	2.33	33	20		

H[m]	D[m]	Max lux	Med lux	Beta=18.8°+18.8°	G=0.0
1.00	0.68	826	497		
2.00	1.36	206	124		
3.00	2.04	92	55		
4.00	2.72	52	31		
5.00	3.40	33	20		