

Luminaire

Code CA00204+AP90300
 Name GOPLE 60 SPOT TRK16 48V WF 2700K NRO + VECTOR 40 - SOFT FILTER

Measurem.

Code FTS2200082
 Name GOPLE 60 SPOT TRK16 48V WF 2700K NRO + VECTOR 40 - SOFT FILTER

Luminaire Flux	373 lm	Luminaire Power	9.0 W	Efficacy	41.449 lm/W	Efficiency	100.00%
Source Flux	373 lm	Maximum value	3008.02 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		373 lm	
LED Flux=805lm LED Power=7.9W Eff=46% EfcLed=102lm/W EfcLum=41lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(6K)=50000h							
C.I.E.	96 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=55mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

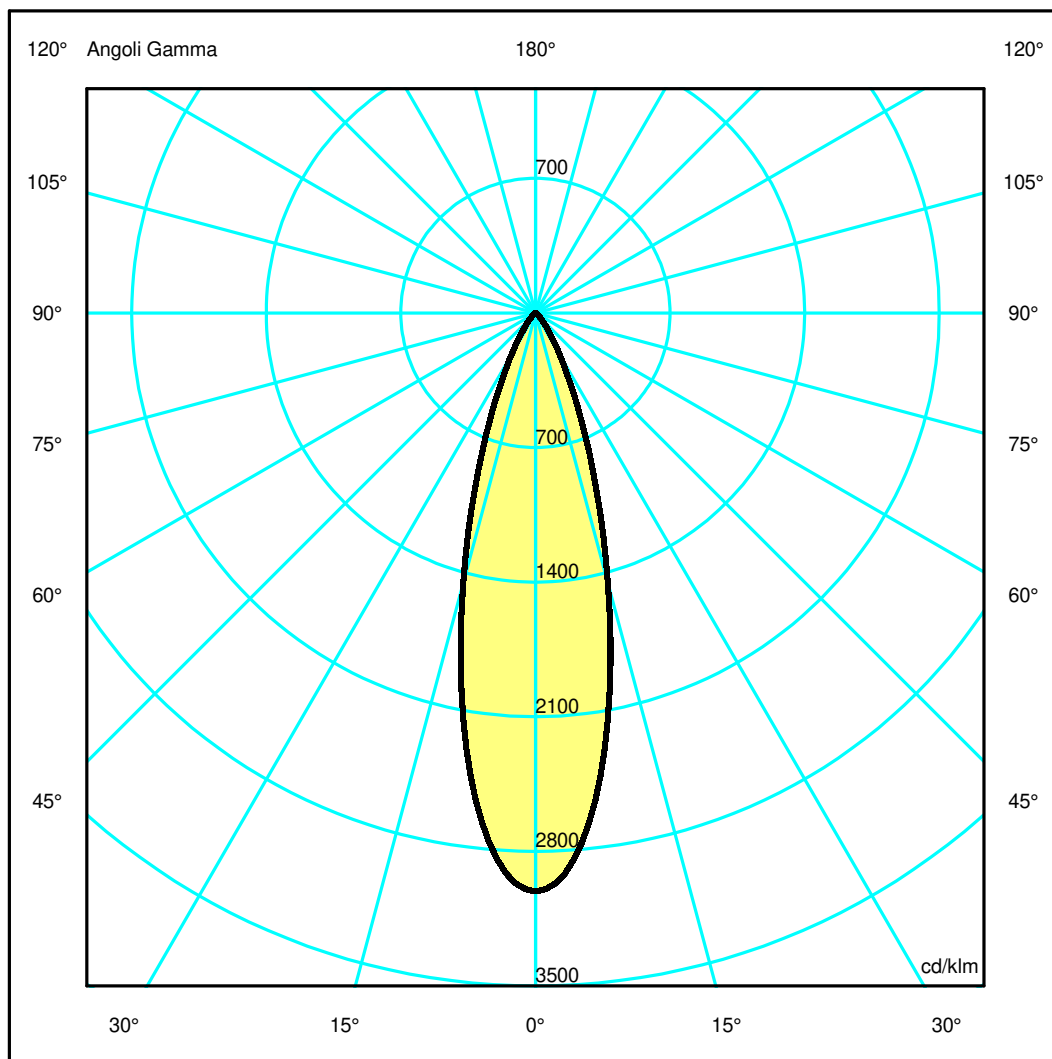

Luminaire

Code CA00204+AP90300
 Name GOPLE 60 SPOT TRK16 48V WF 2700K NRO + VECTOR 40 - SOFT FILTER

Measurerm.

Code FTS2200082
 Name GOPLE 60 SPOT TRK16 48V WF 2700K NRO + VECTOR 40 - SOFT FILTER

Luminaire Flux	373 lm	Luminaire Power	9.0 W	Efficacy	41.449 lm/W	Efficiency	100.00%
Source Flux	373 lm	Maximum value	3008.02 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		07-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		373 lm	


LED Flux=805lm LED Power=7.9W Eff=46% EfcLed=102lm/W EfcLum=41lm/W CCT=2700K Ra=90 R9=50 SDCM=2 L70(6K)=50000h

C.I.E.	96 99 100 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.26	0.52	0.78	1.04	1.31	OC	0.26	0.52	0.78	1.04	1.31
OB	0.26	0.52	0.78	1.04	1.31	OD	0.26	0.52	0.78	1.04	1.31

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1122.11	1031.19	542.43	179.02	48.62	13.02	3.86	1.65	0.72	0.08
OB	1122.11	1031.19	542.43	179.02	48.62	13.02	3.86	1.65	0.72	0.08
OC	1122.11	1031.19	542.43	179.02	48.62	13.02	3.86	1.65	0.72	0.08
OD	1122.11	1031.19	542.43	179.02	48.62	13.02	3.86	1.65	0.72	0.08

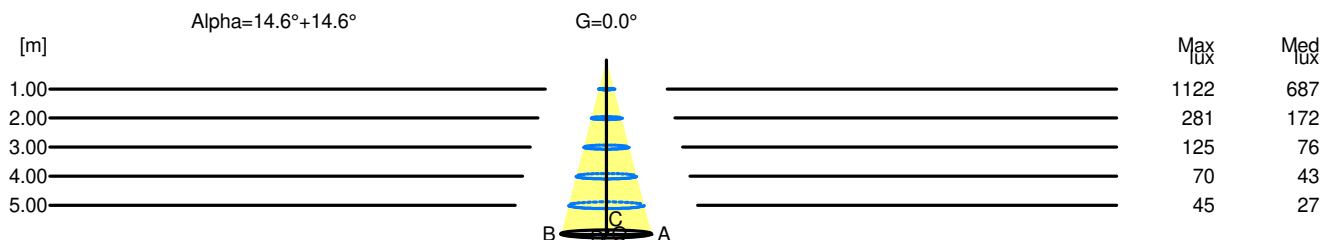

H[m]	D[m]	Max lux	Med lux	Alpha=14.6°+14.6°	G=0.0
1.00	0.52	1122	687		
2.00	1.04	281	172		
3.00	1.57	125	76		
4.00	2.09	70	43		
5.00	2.61	45	27		