

Luminaire

Code CA11001+AP91200
 Name GOPLE 80 SPOT TRK16 48V SP 3000K BCO + VECTOR 55 - LENS FOR ELLIPTICAL EMISSION

Measurement


Code FTS2200052
 Name GOPLE 80 SPOT TRK16 48V SP 3000K BCO + VECTOR 55 - LENS FOR ELLIPTICAL EMISSION

Luminaire Flux	1021 lm	Luminaire Power	23.0 W	Efficacy	44.397 lm/W	Efficiency	100.00%
Source Flux	1021 lm	Maximum value	3842.70 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	77 mm	Height	150 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area			0.001662 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.000402 m2
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		01-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1021 lm	


LED Flux=2435lm LED Power=22W Eff=42% EfcLed=113lm/W EfcLum=44lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h

C.I.E. 95 98 100 100 100
 F UTE 1.00 A

D DIN 5040
 B NBN
 A60
 BZ 1

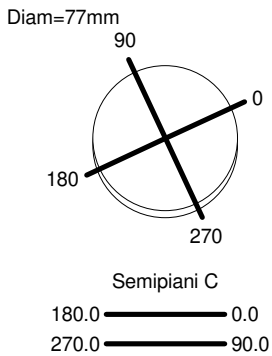

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

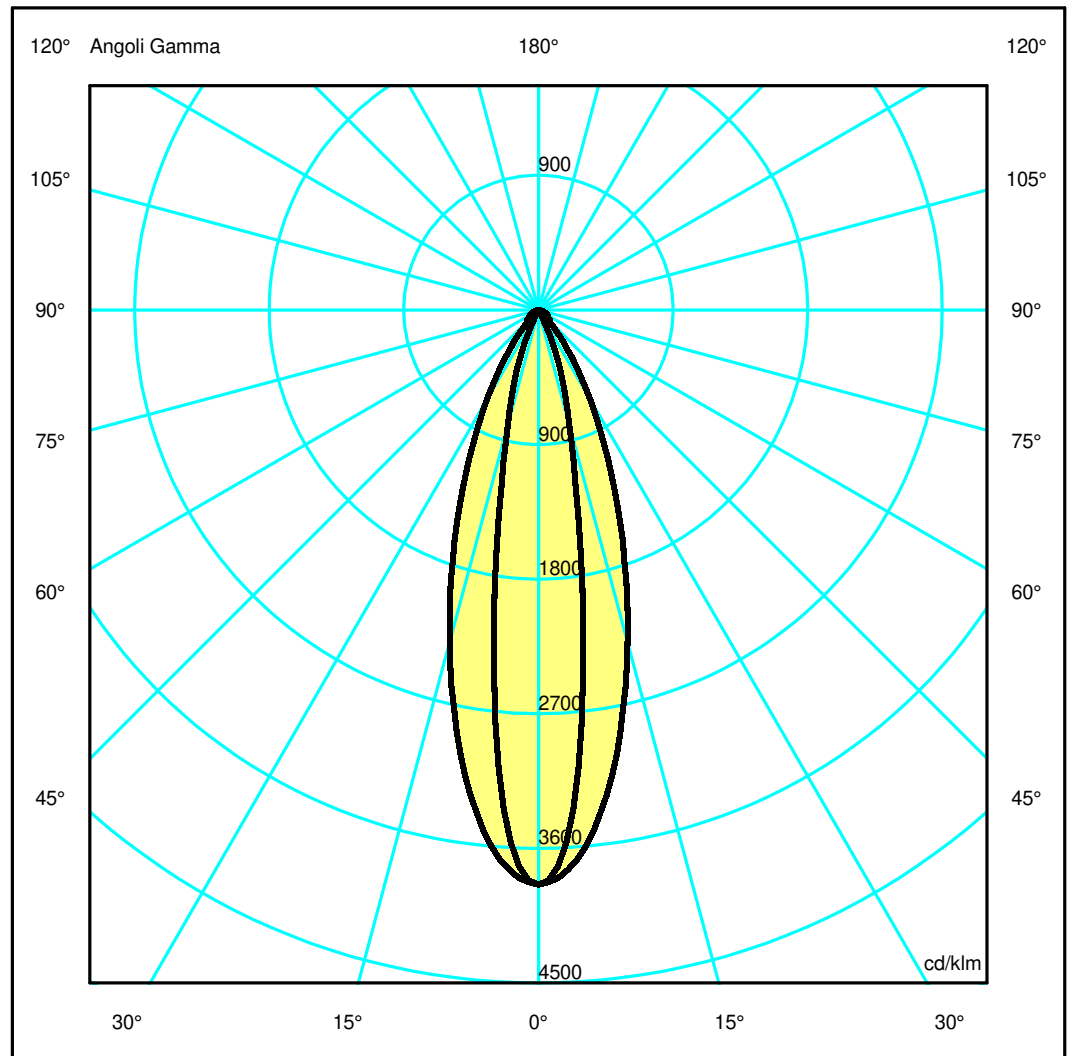

Luminaire

Code CA11001+AP91200
 Name GOPLE 80 SPOT TRK16 48V SP 3000K BCO + VECTOR 55 - LENS FOR ELLIPTICAL EMISSION

Measurement

Code FTS2200052
 Name GOPLE 80 SPOT TRK16 48V SP 3000K BCO + VECTOR 55 - LENS FOR ELLIPTICAL EMISSION

Luminaire Flux	1021 lm	Luminaire Power	23.0 W	Efficacy	44.397 lm/W	Efficiency	100.00%
Source Flux	1021 lm	Maximum value	3842.70 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Round Luminaire		Diam.	77 mm	Height	150 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.000402 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		01-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1021 lm	


LED Flux=2435lm LED Power=22W Eff=42% EfcLed=113lm/W EfcLum=44lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h

C.I.E.	95 98 100 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.32	0.64	0.96	1.28	1.61	OC	0.16	0.31	0.47	0.62	0.78
OB	0.32	0.64	0.96	1.28	1.61	OD	0.16	0.31	0.47	0.62	0.78

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3923.90	3676.91	2348.85	1120.61	398.17	106.80	63.35	53.62	30.06	6.56
OB	3923.90	3676.91	2348.85	1120.61	398.17	106.80	63.35	53.62	30.06	6.56
OC	3923.90	3132.82	813.62	129.49	20.47	9.97	5.21	2.28	1.87	0.83
OD	3923.90	3132.82	813.62	129.49	20.47	9.97	5.21	2.28	1.87	0.83

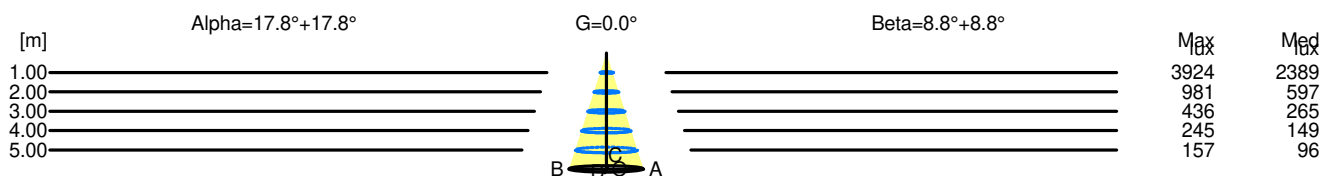

H[m]	D[m]	Max lux	Med lux	Alpha=17.8°+17.8°	G=0.0
1.00	0.64	3924	2389		
2.00	1.28	981	597		
3.00	1.93	436	265		
4.00	2.57	245	149		
5.00	3.21	157	96		

H[m]	D[m]	Max lux	Med lux	Beta=8.8°+8.8°	G=0.0
1.00	0.31	3924	2389		
2.00	0.62	981	597		
3.00	0.93	436	265		
4.00	1.24	245	149		
5.00	1.55	157	96		