


Luminaire

Code CA11001+AP91400
 Name GOPLE 80 SPOT TRK16 48V SP 3000K BCO + VECTOR 55 - ANTI-DUZZLE LOUVRE

Measurement

Code FTS2200051
 Name GOPLE 80 SPOT TRK16 48V SP 3000K BCO + VECTOR 55 - ANTI-DUZZLE LOUVRE

Luminaire Flux	1023 lm	Luminaire Power	23.0 W	Efficacy	44.471 lm/W	Efficiency	100.00%
Source Flux	1023 lm	Maximum value	9643.54 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	77 mm	Height	150 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000402 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		01-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1023 lm	
LED Flux=2435lm LED Power=22W Eff=42% EfcLed=113lm/W EfcLum=44lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	100	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

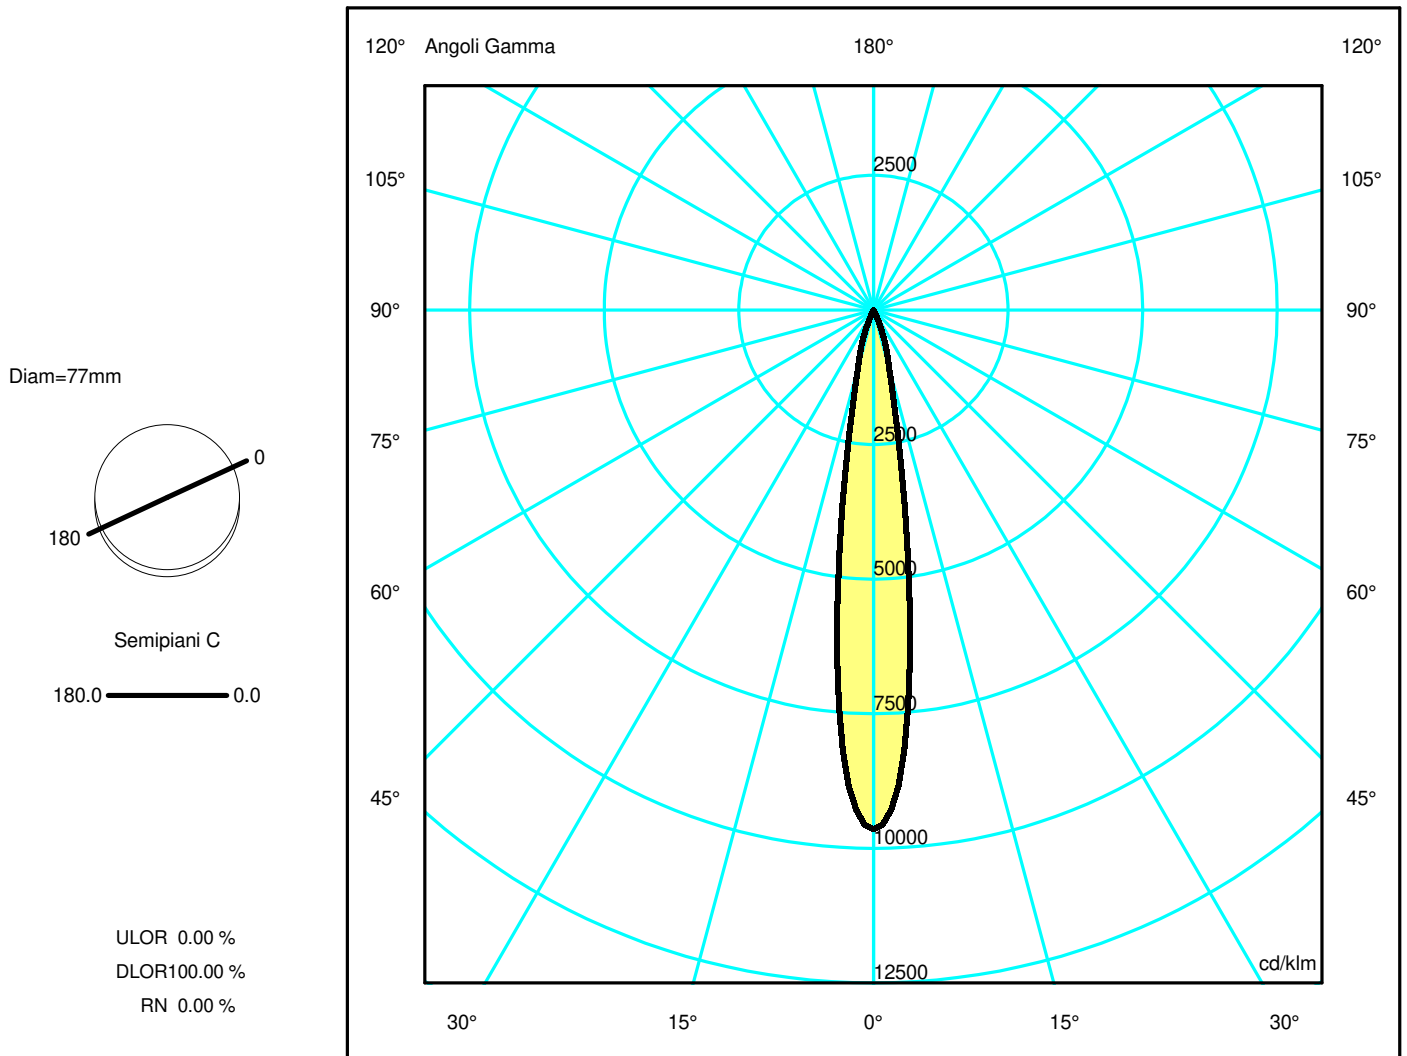

Luminaire

Code CA11001+AP91400
 Name GOPLE 80 SPOT TRK16 48V SP 3000K BCO + VECTOR 55 - ANTI-DUZZLE LOUVRE

Measurem.


Code FTS2200051
 Name GOPLE 80 SPOT TRK16 48V SP 3000K BCO + VECTOR 55 - ANTI-DUZZLE LOUVRE

Luminaire Flux	1023 lm	Luminaire Power	23.0 W	Efficacy	44.471 lm/W	Efficiency	100.00%
Source Flux	1023 lm	Maximum value	9643.54 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	77 mm	Height	150 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.000402 m ²	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		01-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1023 lm	
LED Flux=2435lm LED Power=22W Eff=42% EfcLed=113lm/W EfcLum=44lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.14	0.27	0.41	0.54	0.68	OC	0.14	0.27	0.41	0.54	0.68
OB	0.14	0.27	0.41	0.54	0.68	OD	0.14	0.27	0.41	0.54	0.68

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	9863.70	7563.04	1158.96	145.38	14.16	4.04	1.43	0.46	0.36	0.28
OB	9863.70	7563.04	1158.96	145.38	14.16	4.04	1.43	0.46	0.36	0.28
OC	9863.70	7563.04	1158.96	145.38	14.16	4.04	1.43	0.46	0.36	0.28
OD	9863.70	7563.04	1158.96	145.38	14.16	4.04	1.43	0.46	0.36	0.28

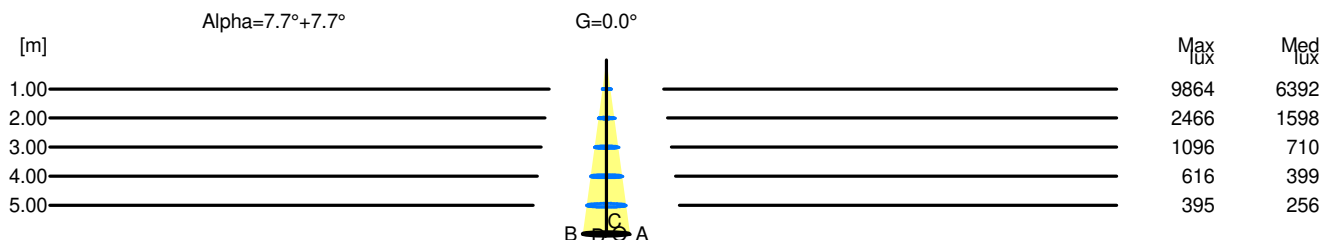

H[m]	D[m]	Max lux	Med lux	Alpha=7.7°+7.7°	G=0.0
1.00	0.27	9864	6392		
2.00	0.54	2466	1598		
3.00	0.82	1096	710		
4.00	1.09	616	399		
5.00	1.36	395	256		