

Luminaire

Code CA12104
Name GOPLE 80 SPOT TRK16 48V FL 4000K NRO

Measurerm.

Code FTS2200069
Name GOPLE 80 SPOT TRK16 48V FL 4000K NRO

Luminaire Flux	1814 lm	Luminaire Power	23.0 W	Efficacy	78.887 lm/W	Efficiency	100.00%
Source Flux	1814 lm	Maximum value	5833.50 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	77 mm	Height	150 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000402 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		01-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1814 lm	
LED Flux=2473lm LED Power=22W Eff=73% EfcLed=114lm/W EfcLum=79lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	


Diam=77mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %

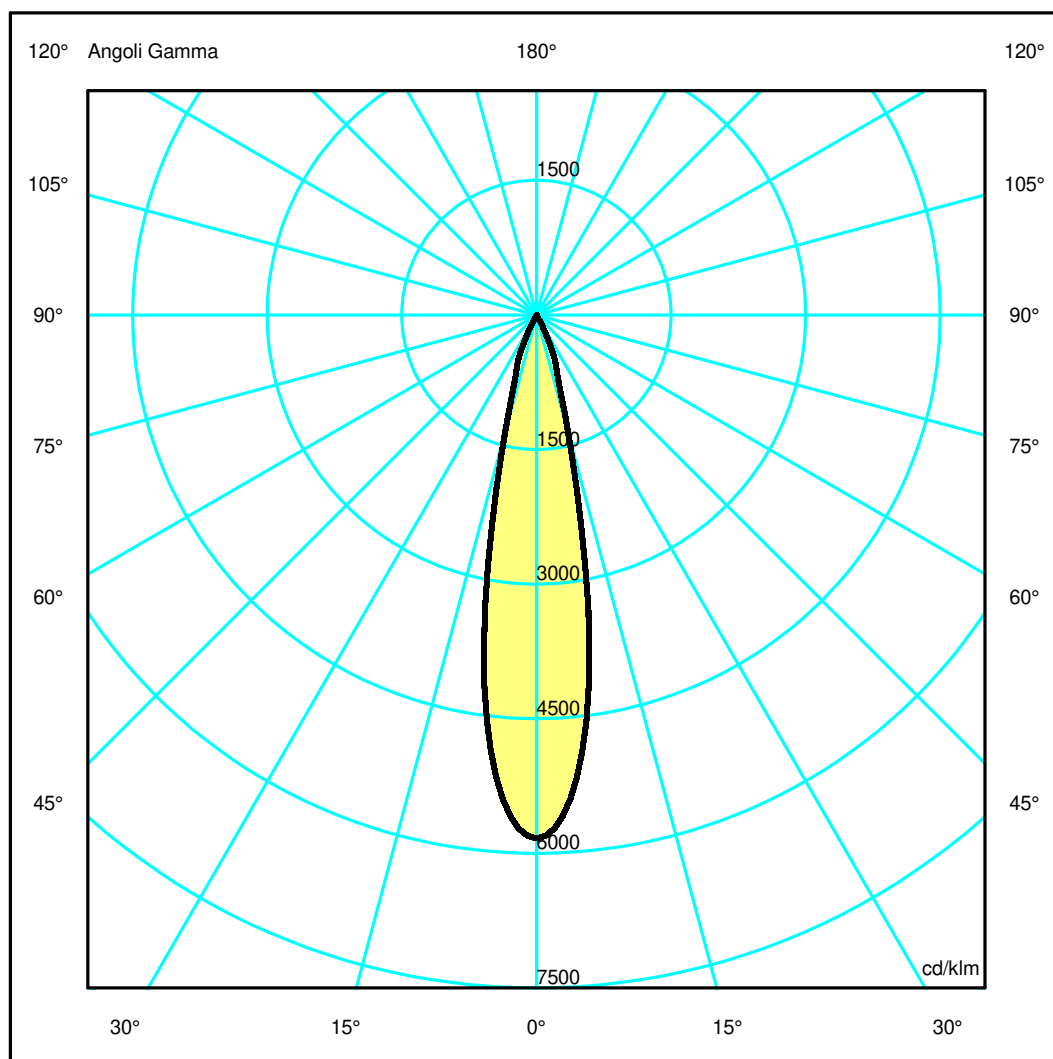

Luminaire

Code CA12104
Name GOPLE 80 SPOT TRK16 48V FL 4000K NRO

Measurerm.


Code FTS2200069
Name GOPLE 80 SPOT TRK16 48V FL 4000K NRO

Luminaire Flux	1814 lm	Luminaire Power	23.0 W	Efficacy	78.887 lm/W	Efficiency	100.00%
Source Flux	1814 lm	Maximum value	5833.50 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	77 mm	Height	150 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000402 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		01-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1814 lm	
LED Flux=2473lm LED Power=22W Eff=73% EfcLed=114lm/W EfcLum=79lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.19	0.38	0.58	0.77	0.96	OC	0.19	0.38	0.58	0.77	0.96
OB	0.19	0.38	0.58	0.77	0.96	OD	0.19	0.38	0.58	0.77	0.96

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	10584.36	9381.10	2480.50	587.86	17.01	7.31	4.25	2.88	1.56	0.56
OB	10584.36	9381.10	2480.50	587.86	17.01	7.31	4.25	2.88	1.56	0.56
OC	10584.36	9381.10	2480.50	587.86	17.01	7.31	4.25	2.88	1.56	0.56
OD	10584.36	9381.10	2480.50	587.86	17.01	7.31	4.25	2.88	1.56	0.56

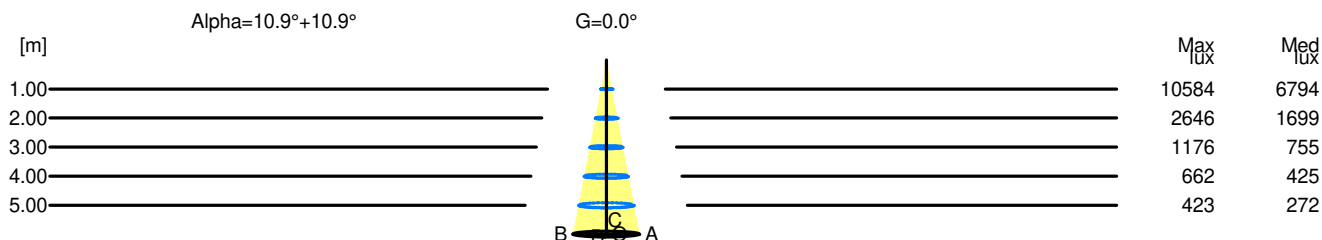

H[m]	D[m]	Max lux	Med lux	Alpha=10.9°+10.9°	G=0.0
1.00	0.38	10584	6794		
2.00	0.77	2646	1699		
3.00	1.15	1176	755		
4.00	1.53	662	425		
5.00	1.92	423	272		