

## Luminaire

Code CD003101IN0+BZ06304  
 Name A.39 SHARP REFR RCS WI 600X600 DALI BCO + A.39 SHARP REFR KIT LOUVRES BCO 600x600

## Measurement

Code FTS2200016-A  
 Name A.39 SHARP REFR RCS WI 600X600 DALI BCO + A.39 SHARP REFR KIT LOUVRES BCO 600x600


Luminaire Flux	3503 lm	Luminaire Power	28.0 W	Efficacy	125.121 lm/W	Efficiency	100.00%
Source Flux	3503 lm	Maximum value	1178.66 cd/klm	Position	C=40.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	600 mm	Width	600 mm	Height	30 mm
Rectangular Luminous Area		Length	280 mm	Width	105 mm	Height	0 mm
Horizontal Luminous Area		0.029400 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.007113 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		01-12-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3503 lm	

LED Flux=4354lm LED Power=23W Eff=80% EfcLed=186lm/W EfcLum=125lm/W CCT=5000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h


C.I.E. 99 100 100 100 100  
 F UTE --

D DIN 5040  
 B NBN

A60  
 BZ 1

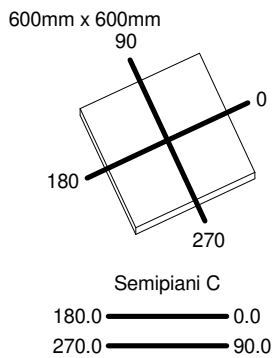

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

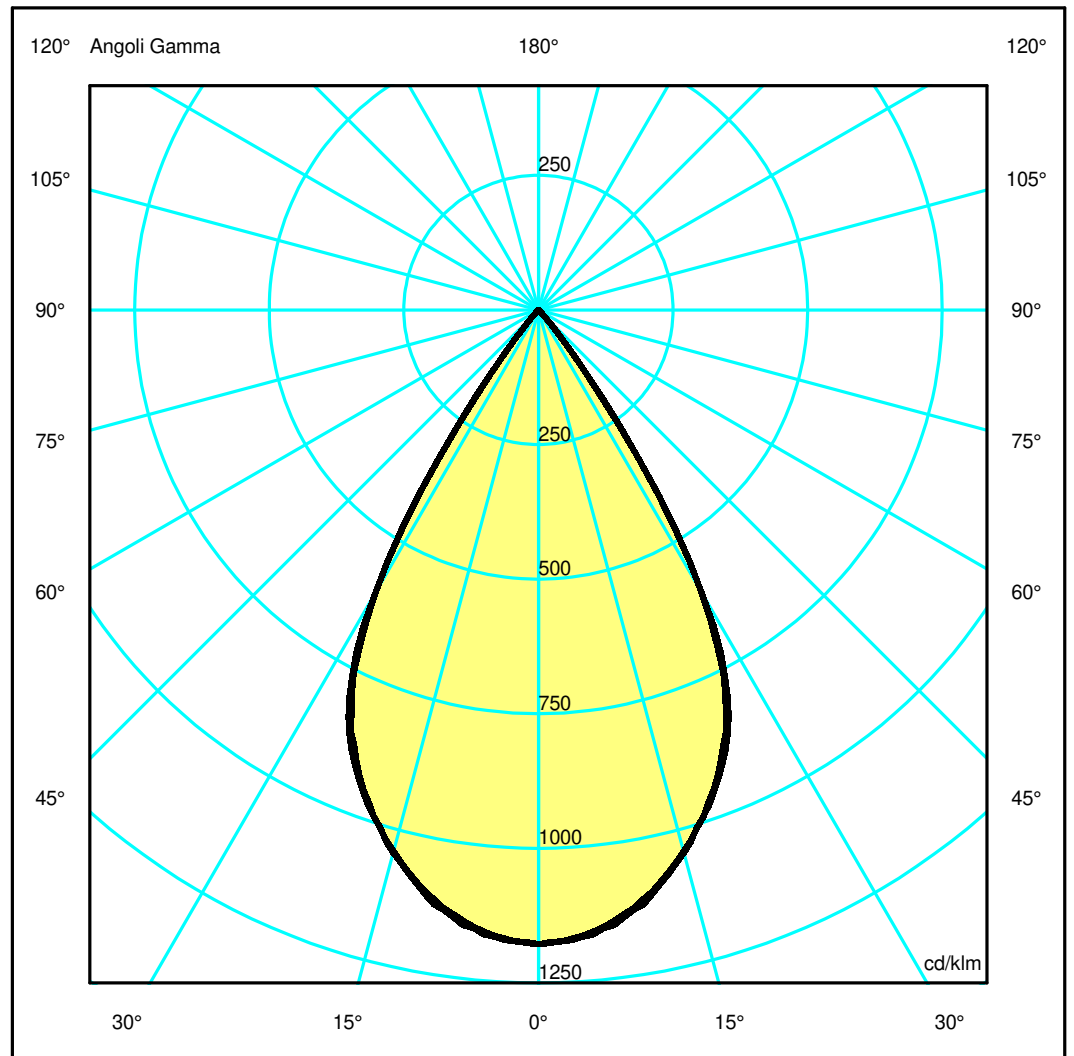

## Luminaire

Code CD003101IN0+BZ06304  
 Name A.39 SHARP REFR RCS WI 600X600 DALI BCO + A.39 SHARP REFR KIT LOUVRES BCO 600x600

## Measurerm.


Code FTS2200016-A  
 Name A.39 SHARP REFR RCS WI 600X600 DALI BCO + A.39 SHARP REFR KIT LOUVRES BCO 600x600

Luminaire Flux	3503 lm	Luminaire Power	28.0 W	Efficacy	125.121 lm/W	Efficiency	100.00%
Source Flux	3503 lm	Maximum value	1178.66 cd/klm	Position	C=40.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire Rectangular Luminous Area	Length Length	600 mm 280 mm	Width Width	600 mm 105 mm	Height Height	30 mm 0 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.029400 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.007113 m2			
Coordinate system Date Measurement Distance	CG 01-12-2022 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux	Double Symmetrical 180 3503 lm			
LED Flux=4354lm LED Power=23W Eff=80% EfcLed=186lm/W EfcLum=125lm/W CCT=5000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E. F UTE	99 --	100	100	100		D DIN 5040 B NBN	A60 BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.58	1.17	1.75	2.34	2.92	OC	0.58	1.17	1.75	2.33	2.92
OB	0.58	1.17	1.75	2.34	2.92	OD	0.58	1.17	1.75	2.33	2.92

	Luminous Intensities [ cd/klm ]										
	0	5	15	25	35	45	55	65	75	85	
OA	4125.39	4060.78	3645.52	2926.62	896.37	29.74	5.96	1.39	0.96	0.75	
OB	4125.39	4060.78	3645.52	2926.62	896.37	29.74	5.96	1.39	0.96	0.75	
OC	4125.39	4079.97	3656.89	2880.78	920.33	30.41	6.91	1.38	0.94	0.72	
OD	4125.39	4079.97	3656.89	2880.78	920.33	30.41	6.91	1.38	0.94	0.72	

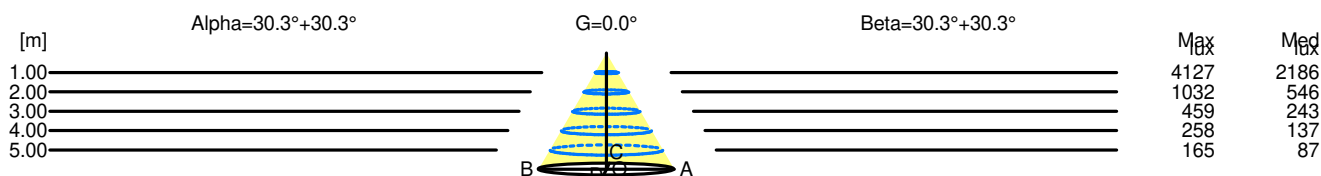

H[m]	D[m]	Max lux	Med lux	Alpha=30.3°+30.3°	G=0.0
1.00	1.17	4127	2186		
2.00	2.34	1032	546		
3.00	3.50	459	243		
4.00	4.67	258	137		
5.00	5.84	165	87		

H[m]	D[m]	Max lux	Med lux	Beta=30.3°+30.3°	G=0.0
1.00	1.17	4127	2186		
2.00	2.33	1032	546		
3.00	3.50	459	243		
4.00	4.67	258	137		
5.00	5.83	165	87		