

## Luminaire

Code CE13004+BZ07101  
 Name SHARP REFRACTIVE TRIM 4 UNIT 2700K WF NRO + SHARP REFRACTIVE KIT LOUVRES 1 UNIT BCO

## Measurement


Code FTS2200267  
 Name SHARP REFRACTIVE TRIM 4 UNIT 2700K WF NRO + SHARP REFRACTIVE KIT LOUVRES 1 UNIT BCO

Luminaire Flux	1131 lm	Luminaire Power	8.0 W	Efficacy	141.366 lm/W	Efficiency	100.00%
Source Flux	1131 lm	Maximum value	1066.40 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	164 mm	Width	55 mm	Height	55 mm
Rectangular Luminous Area		Length	140 mm	Width	35 mm	Height	0 mm
Horizontal Luminous Area		0.004900 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.001185 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		04-10-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1131 lm	

LED Flux=1249lm LED Power=8W Eff=91% EfcLed=156lm/W EfcLum=141lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h

C.I.E.	92 97 99 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1


164mm x 55mm



Semipiani C

180.0 — 0.0  
 270.0 — 90.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

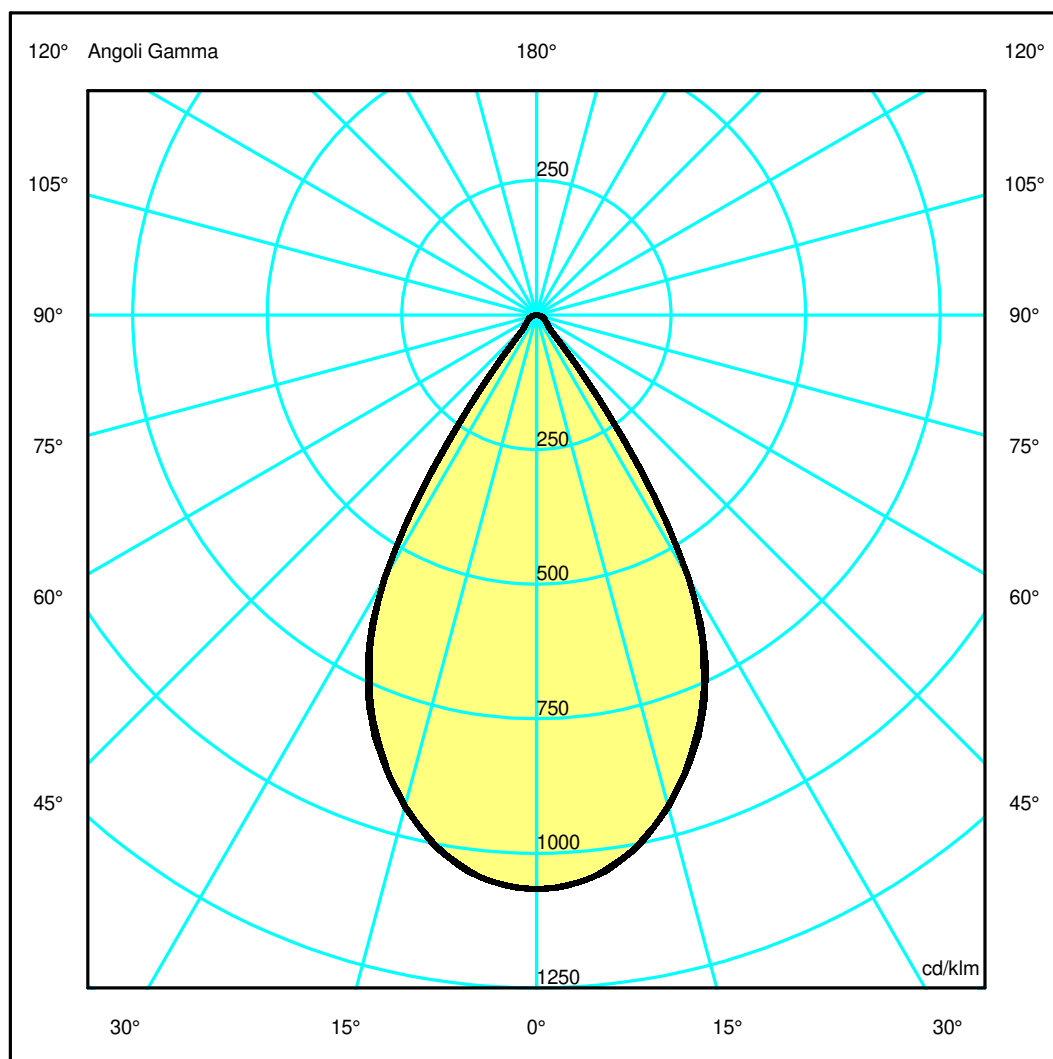

### Luminaire

Code CE13004+BZ07101  
 Name SHARP REFRACTIVE TRIM 4 UNIT 2700K WF NRO + SHARP REFRACTIVE KIT LOUVRES 1 UNIT BCO

### Measurment.

Code FTS2200267  
 Name SHARP REFRACTIVE TRIM 4 UNIT 2700K WF NRO + SHARP REFRACTIVE KIT LOUVRES 1 UNIT BCO

Luminaire Flux	1131 lm	Luminaire Power	8.0 W	Efficacy	141.366 lm/W	Efficiency	100.00%
Source Flux	1131 lm	Maximum value	1066.40 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	164 mm	Width	55 mm	Height	55 mm
Rectangular Luminous Area		Length	140 mm	Width	35 mm	Height	0 mm
Horizontal Luminous Area		0.004900 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001185 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		04-10-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1131 lm	


LED Flux=1249lm LED Power=8W Eff=91% EfcLed=156lm/W EfcLum=141lm/W CCT=2700K Ra=90 SDCM=3 L70(6K)=50000h

C.I.E.	92 97 99 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.59	1.18	1.78	2.37	2.96	OC	0.59	1.18	1.77	2.37	2.96
OB	0.59	1.18	1.78	2.37	2.96	OD	0.59	1.18	1.77	2.37	2.96

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1206.03	1190.95	1069.39	839.86	312.50	37.74	24.46	18.03	10.82	3.31
OB	1206.03	1190.95	1069.39	839.86	312.50	37.74	24.46	18.03	10.82	3.31
OC	1206.03	1191.29	1068.12	831.03	321.07	37.12	24.20	17.59	10.38	3.08
OD	1206.03	1191.29	1068.12	831.03	321.07	37.12	24.20	17.59	10.38	3.08

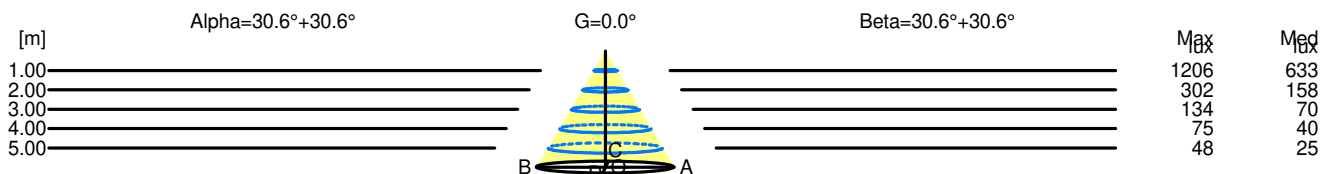

H[m]	D[m]	Max lux	Med lux	Alpha=30.6°+30.6°	G=0.0
1.00	1.18	1206	633		
2.00	2.37	302	158		
3.00	3.55	134	70		
4.00	4.73	75	40		
5.00	5.92	48	25		

H[m]	D[m]	Max lux	Med lux	Beta=30.6°+30.6°	G=0.0
1.00	1.18	1206	633		
2.00	2.37	302	158		
3.00	3.55	134	70		
4.00	4.73	75	40		
5.00	5.91	48	25		