

Luminaire

Code CE13304+BZ07101
 Name SHARP REFRACTIVE TRIM 4 UNIT 4000K WF NRO + SHARP REFRACTIVE KIT LOUVRES 1 UNIT BCO

Measurement

Code FTS2200275-A
 Name SHARP REFRACTIVE TRIM 4 UNIT 4000K WF NRO + SHARP REFRACTIVE KIT LOUVRES 1 UNIT BCO

Luminaire Flux	1214 lm	Luminaire Power	8.0 W	Efficacy	151.750 lm/W	Efficiency	100.00%
Source Flux	1214 lm	Maximum value	1066.40 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	164 mm	Width	55 mm	Height	55 mm
Rectangular Luminous Area		Length	140 mm	Width	35 mm	Height	0 mm
Horizontal Luminous Area		0.004900 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.001185 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		29-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1214 lm	


LED Flux=1341lm LED Power=8W Eff=91% EfcLed=168lm/W EfcLum=152lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=50000h

C.I.E. 92 97 99 100 100
 F UTE 1.00 A

D DIN 5040
 B NBN

A60
 BZ 1


164mm x 55mm



Semipiani C

180.0 — 0.0
 270.0 — 90.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

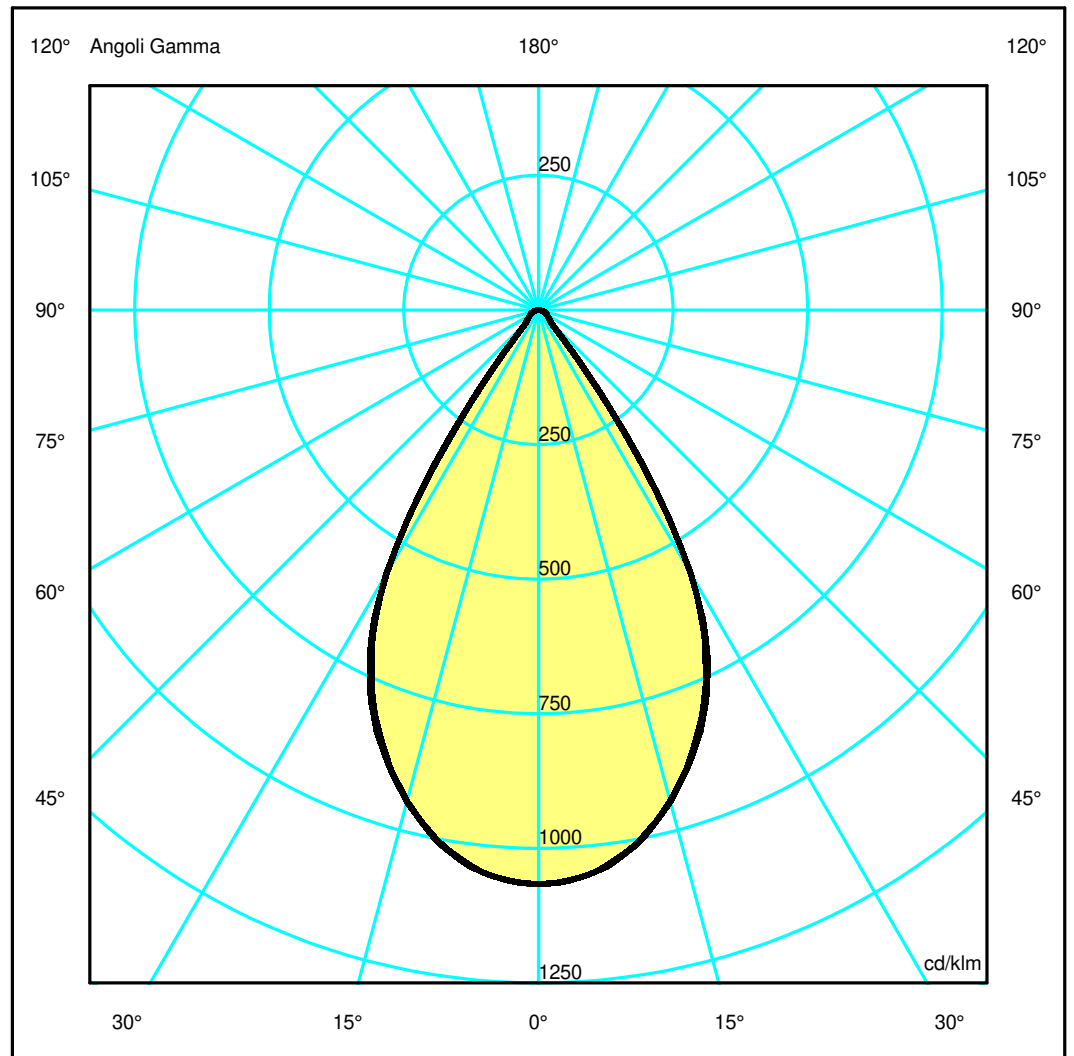

Luminaire

Code CE13304+BZ07101
 Name SHARP REFRACTIVE TRIM 4 UNIT 4000K WF NRO + SHARP REFRACTIVE KIT LOUVRES 1 UNIT BCO

Measurement

Code FTS2200275-A
 Name SHARP REFRACTIVE TRIM 4 UNIT 4000K WF NRO + SHARP REFRACTIVE KIT LOUVRES 1 UNIT BCO

Luminaire Flux	1214 lm	Luminaire Power	8.0 W	Efficacy	151.750 lm/W	Efficiency	100.00%
Source Flux	1214 lm	Maximum value	1066.40 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	164 mm	Width	55 mm	Height	55 mm
Rectangular Luminous Area		Length	140 mm	Width	35 mm	Height	0 mm
Horizontal Luminous Area		0.004900 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.001185 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		29-09-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1214 lm	


LED Flux=1341lm LED Power=8W Eff=91% EfcLed=168lm/W EfcLum=152lm/W CCT=4000K Ra=90 SDCM=3 L70(6K)=50000h

C.I.E.	92 97 99 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.59	1.18	1.78	2.37	2.96	OC	0.59	1.18	1.77	2.37	2.96
OB	0.59	1.18	1.78	2.37	2.96	OD	0.59	1.18	1.77	2.37	2.96

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1294.61	1278.43	1147.94	901.55	335.45	40.51	26.25	19.35	11.61	3.56
OB	1294.61	1278.43	1147.94	901.55	335.45	40.51	26.25	19.35	11.61	3.56
OC	1294.61	1278.80	1146.57	892.07	344.66	39.85	25.98	18.89	11.14	3.31
OD	1294.61	1278.80	1146.57	892.07	344.66	39.85	25.98	18.89	11.14	3.31

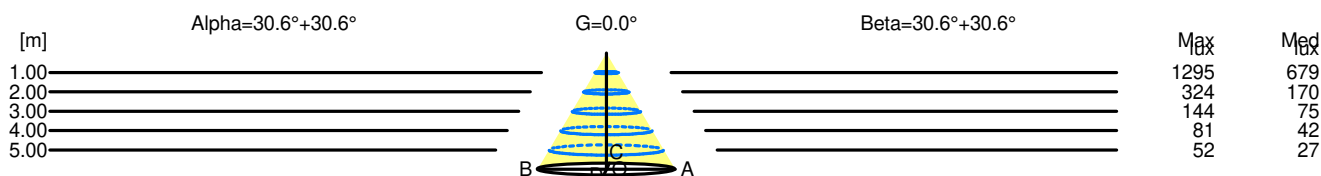

H[m]	D[m]	Max lux	Med lux	Alpha=30.6°+30.6°	G=0.0
1.00	1.18	1295	679		
2.00	2.37	324	170		
3.00	3.55	144	75		
4.00	4.73	81	42		
5.00	5.92	52	27		

H[m]	D[m]	Max lux	Med lux	Beta=30.6°+30.6°	G=0.0
1.00	1.18	1295	679		
2.00	2.37	324	170		
3.00	3.55	144	75		
4.00	4.73	81	42		
5.00	5.91	52	27		