

Luminaire


Code KA53108+BZ06104
 Name Kata metron 2368 ref dir 940 Dali rso + A.39 S/C SHARP REFR KIT LOUVRES 2368 NRO

Measurement

Code FTS2400476.
 Name Kata metron 2368 ref dir 940 Dali rso + A.39 S/C SHARP REFR KIT LOUVRES 2368 NRO

Luminaire Flux	9514 lm	Luminaire Power	73.0 W	Efficacy	130.329 lm/W	Efficiency	100.00%
Source Flux	9514 lm	Maximum value	1170.52 cd/klm	Position	C=5.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	100 mm	Height	85 mm
Rectangular Luminous Area		Length	2240 mm	Width	35 mm	Height	0 mm
Horizontal Luminous Area		0.078400 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.018967 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		16-04-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		9514 lm	
LED Flux=11825lm LED Power=63W Eff=80% EfcLed=188lm/W EfcLum=130lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	98	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	


2368mm x 100mm



Semipiani C

180.0 — 0.0
 270.0 — 90.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

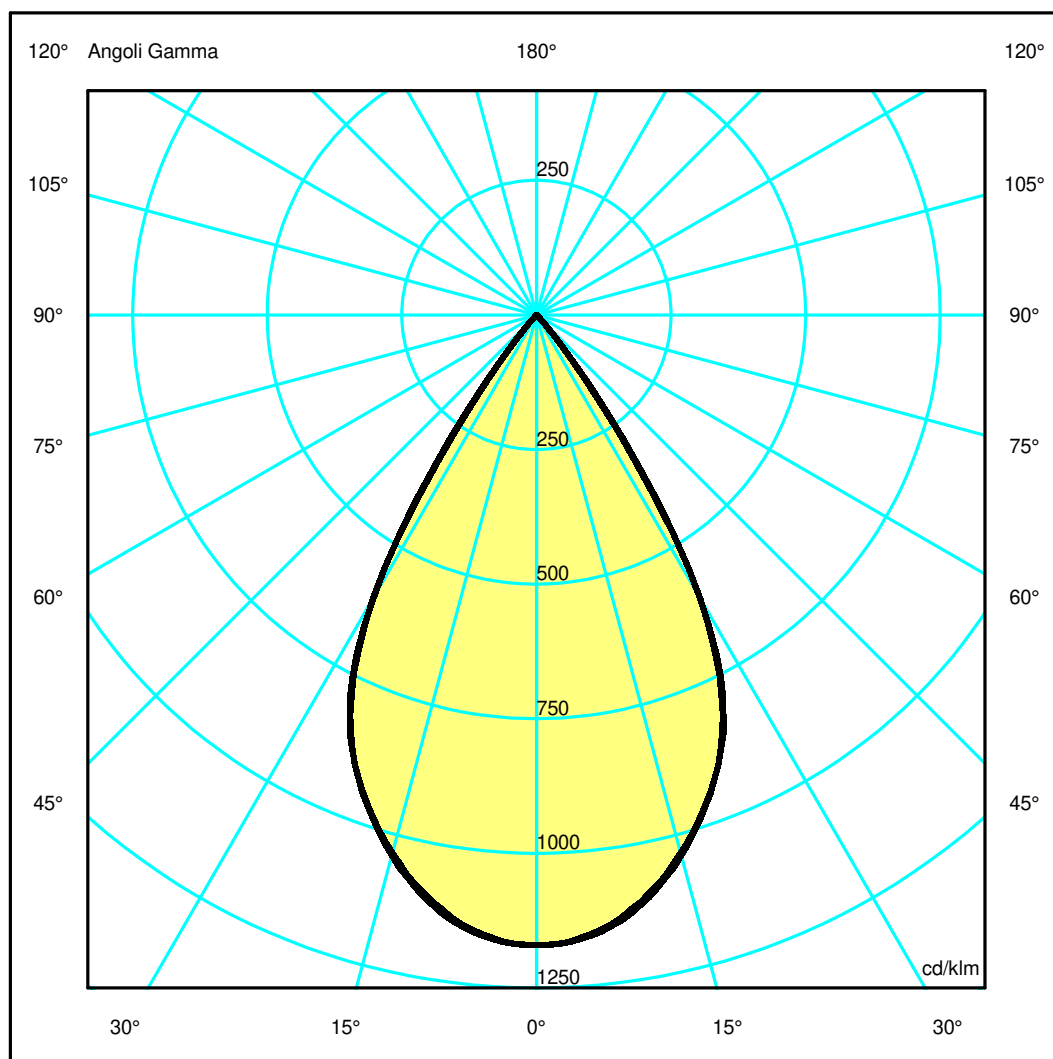

Luminaire

Code KA53108+BZ06104
Name Kata metron 2368 ref dir 940 Dali rso + A.39 S/C SHARP REFR KIT LOUVRES 2368 NRO

Measurem.

Code FTS2400476.
Name Kata metron 2368 ref dir 940 Dali rso + A.39 S/C SHARP REFR KIT LOUVRES 2368 NRO

Luminaire Flux	9514 lm	Luminaire Power	73.0 W	Efficacy	130.329 lm/W	Efficiency	100.00%
Source Flux	9514 lm	Maximum value	1170.52 cd/klm	Position	C=5.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	100 mm	Height	85 mm
Rectangular Luminous Area		Length	2240 mm	Width	35 mm	Height	0 mm
Horizontal Luminous Area		0.078400 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.018967 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		16-04-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		9514 lm	


LED Flux=11825lm LED Power=63W Eff=80% EfcLed=188lm/W EfcLum=130lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h

C.I.E.	98 100 100 100 100	D DIN 5040	A60
F UTE	--	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.59	1.17	1.76	2.34	2.93	OC	0.59	1.17	1.76	2.35	2.93
OB	0.59	1.17	1.76	2.34	2.93	OD	0.59	1.17	1.76	2.35	2.93

	Luminous Intensities [cd/klm]										
	0	5	15	25	35	45	55	65	75	85	
OA	11134.93	10981.67	9844.11	7815.22	2519.46	79.07	16.09	3.66	2.44	1.92	
OB	11134.93	10981.67	9844.11	7815.22	2519.46	79.07	16.09	3.66	2.44	1.92	
OC	11134.93	11009.26	9882.87	7789.09	2670.34	83.45	18.07	4.00	2.56	2.01	
OD	11134.93	11009.26	9882.87	7789.09	2670.34	83.45	18.07	4.00	2.56	2.01	

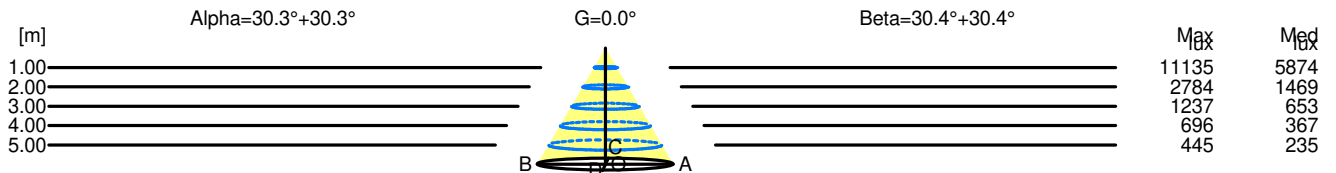

H[m]	D[m]	Max lux	Med lux	Alpha=30.3°+30.3°	G=0.0
1.00	1.17	11135	5874		
2.00	2.34	2784	1469		
3.00	3.51	1237	653		
4.00	4.68	696	367		
5.00	5.85	445	235		

H[m]	D[m]	Max lux	Med lux	Beta=30.4°+30.4°	G=0.0
1.00	1.17	11135	5874		
2.00	2.35	2784	1469		
3.00	3.52	1237	653		
4.00	4.69	696	367		
5.00	5.86	445	235		