

Luminaire

Code KB01117
Name Kata metron 592 dif dir in 930 Dali glo

Measurement

Code FTS2400165.
Name Kata metron 592 dif dir in 930 Dali glo

Luminaire Flux	2319 lm	Luminaire Power	18.0 W	Efficacy	128.833 lm/W	Efficiency	100.00%
Source Flux	2319 lm	Maximum value	310.60 cd/klm	Position	C=5.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	592 mm	Width	100 mm	Height	50 mm
Rectangular Luminous Area		Length	592 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area		0.023680 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.005729 m ²	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		15-04-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2319 lm	


LED Flux=2823lm LED Power=15W Eff=82% EfcLed=187lm/W EfcLum=129lm/W CCT=3000K Ra=90 SDCM=3 L70(17k)=102000h

C.I.E. 55 84 97 66 100
F UTE 0.66 D + 0.34 T

D DIN 5040
B NBN

B41
BZ 3 / 1 / BZ 4


592mm x 100mm



Semipiani C

180.0 ——— 0.0
270.0 ——— 90.0

ULOR 33.51 %
DLOR 66.49 %
RN 33.51 %

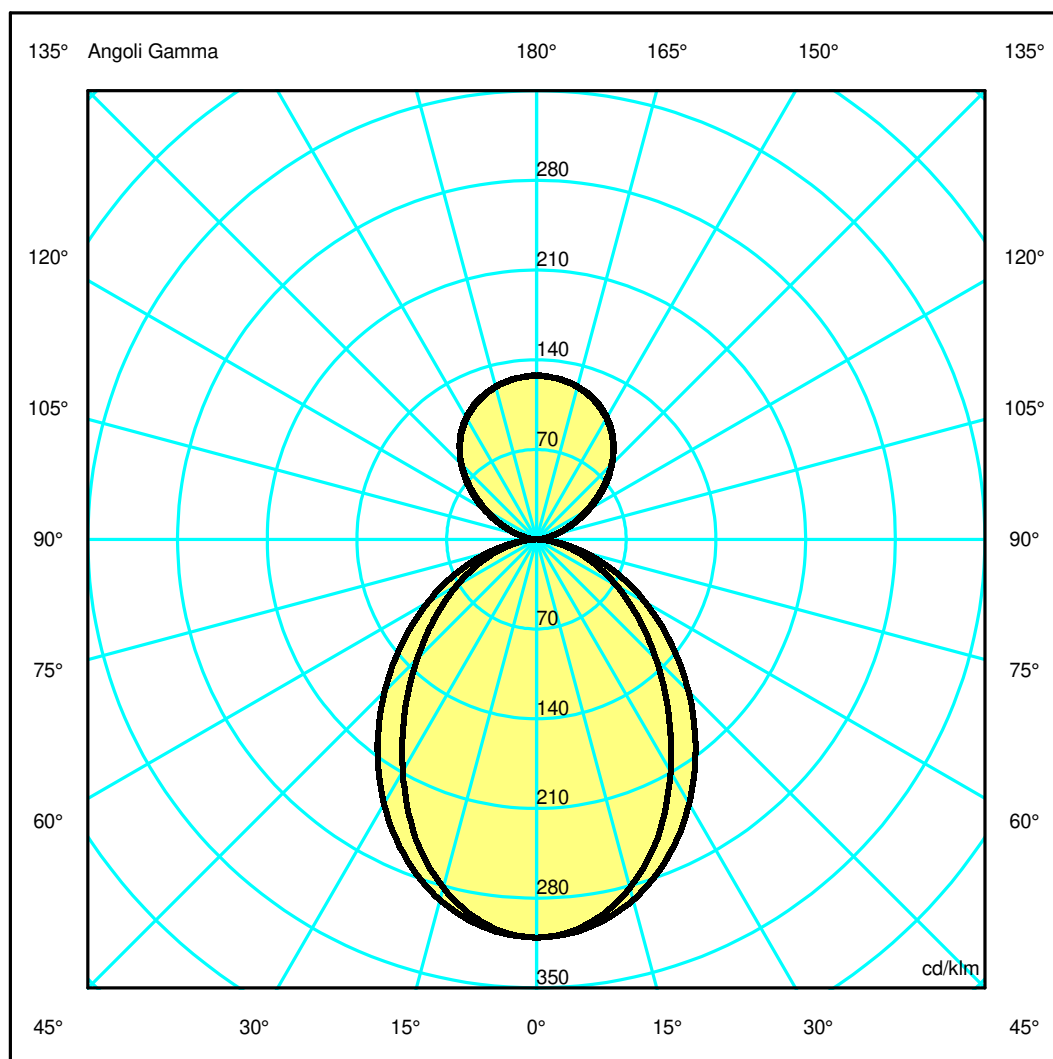

Luminaire

Code KB01117
Name Kata metron 592 dif dir in 930 Dali glo

Measurment.

Code FTS2400165.
Name Kata metron 592 dif dir in 930 Dali glo

Luminaire Flux	2319 lm	Luminaire Power	18.0 W	Efficacy	128.833 lm/W	Efficiency	100.00%
Source Flux	2319 lm	Maximum value	310.60 cd/klm	Position	C=5.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	592 mm	Width	100 mm	Height	50 mm
Rectangular Luminous Area		Length	592 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.023680 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.005729 m2	
Coordinate system	CG	Symmetry Type		Double Symmetrical			
Date	15-04-2024	Maximum Gamma Angle		180			
Measurement Distance	0.00	Measurement Flux		2319 lm			


LED Flux=2823lm LED Power=15W Eff=82% EfcLed=187lm/W EfcLum=129lm/W CCT=3000K Ra=90 SDCM=3 L70(17k)=102000h

C.I.E.	55 84 97 66 100	D DIN 5040	B41
F UTE	0.66 D + 0.34 T	B NBN	BZ 3 / 1 / BZ 4

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.84	1.69	2.53	3.37	4.22	OC	1.09	2.18	3.28	4.37	5.46
OB	0.84	1.69	2.53	3.37	4.22	OD	1.09	2.18	3.28	4.37	5.46

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	720.25	712.18	652.06	547.70	421.48	305.53	208.01	128.69	63.26	14.45
OB	720.25	712.18	652.06	547.70	421.48	305.53	208.01	128.69	63.26	14.45
OC	720.25	714.79	675.97	599.52	500.23	388.78	278.92	177.45	89.30	20.36
OD	720.25	714.79	675.97	599.52	500.23	388.78	278.92	177.45	89.30	20.36

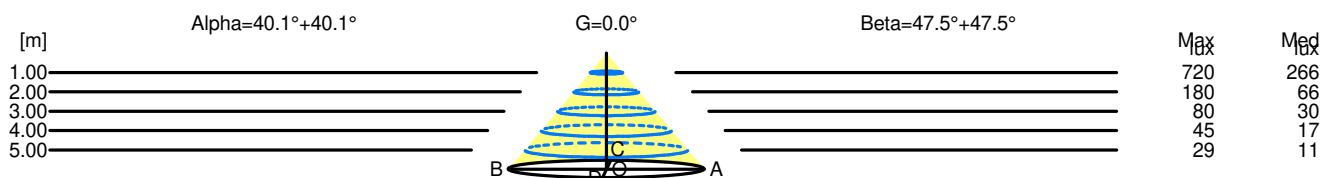

H[m]	D[m]	Max lux	Med lux	Alpha=40.1°+40.1°	G=0.0
1.00	1.69	720	266		
2.00	3.37	180	66		
3.00	5.06	80	30		
4.00	6.75	45	17		
5.00	8.43	29	11		

H[m]	D[m]	Max lux	Med lux	Beta=47.5°+47.5°	G=0.0
1.00	2.18	720	266		
2.00	4.37	180	66		
3.00	6.55	80	30		
4.00	8.74	45	17		
5.00	10.92	29	11		