

Luminaire


Code KB33108+BZ07404
 Name Kata metron 592 ref dir in 940 Dali rso + SHARP REFRACTIVE KIT LOUVRES 4 UNIT NRO

Measurement

Code FTS2400477.
 Name Kata metron 592 ref dir in 940 Dali rso + SHARP REFRACTIVE KIT LOUVRES 4 UNIT NRO

Luminaire Flux	3156 lm	Luminaire Power	25.0 W	Efficacy	126.240 lm/W	Efficiency	100.00%
Source Flux	3156 lm	Maximum value	882.34 cd/klm	Position	C=5.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	592 mm	Width	100 mm	Height	85 mm
Rectangular Luminous Area		Length	560 mm	Width	35 mm	Height	0 mm
Horizontal Luminous Area		0.019600 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.004742 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		16-04-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3156 lm	
LED Flux=3886lm LED Power=21W Eff=81% EfcLed=187lm/W EfcLum=126lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	98 100 100 75 100			D DIN 5040	B61		
F UTE	--			B NBN	BZ 1		


592mm x 100mm



Semipiani C

180.0 — 0.0
 270.0 — 90.0

ULOR 24.62 %
 DLOR 75.38 %
 RN 24.62 %

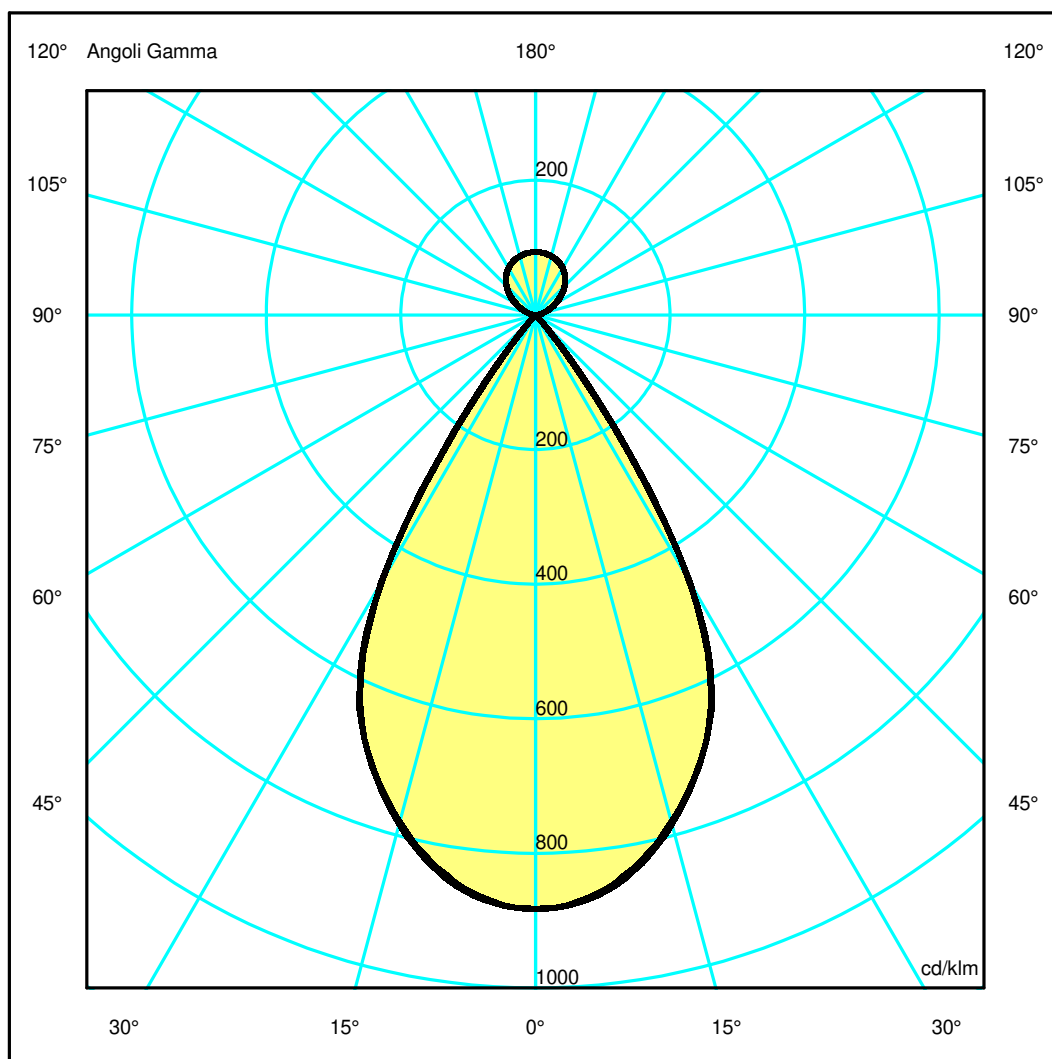

Luminaire

Code KB33108+BZ07404
 Name Kata metron 592 ref dir in 940 Dali rso + SHARP REFRACTIVE KIT LOUVRES 4 UNIT NRO

Measurement


Code FTS2400477.
 Name Kata metron 592 ref dir in 940 Dali rso + SHARP REFRACTIVE KIT LOUVRES 4 UNIT NRO

Luminaire Flux	3156 lm	Luminaire Power	25.0 W	Efficacy	126.240 lm/W	Efficiency	100.00%
Source Flux	3156 lm	Maximum value	882.34 cd/klm	Position	C=5.00 G=1.00	CG	Double Symmetrical
Rectangular Luminaire		Length	592 mm	Width	100 mm	Height	85 mm
Rectangular Luminous Area		Length	560 mm	Width	35 mm	Height	0 mm
Horizontal Luminous Area		0.019600 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.004742 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		16-04-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3156 lm	
LED Flux=3886lm LED Power=21W Eff=81% EfcLed=187lm/W EfcLum=126lm/W CCT=4000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	98 100 100 75 100			D DIN 5040	B61		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.59	1.17	1.76	2.34	2.93	OC	0.59	1.17	1.76	2.35	2.93
OB	0.59	1.17	1.76	2.34	2.93	OD	0.59	1.17	1.76	2.35	2.93

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2784.32	2746.00	2461.55	1954.22	630.00	19.77	4.02	0.92	0.61	0.48
OB	2784.32	2746.00	2461.55	1954.22	630.00	19.77	4.02	0.92	0.61	0.48
OC	2784.32	2752.89	2471.24	1947.68	667.73	20.87	4.52	1.00	0.64	0.50
OD	2784.32	2752.89	2471.24	1947.68	667.73	20.87	4.52	1.00	0.64	0.50

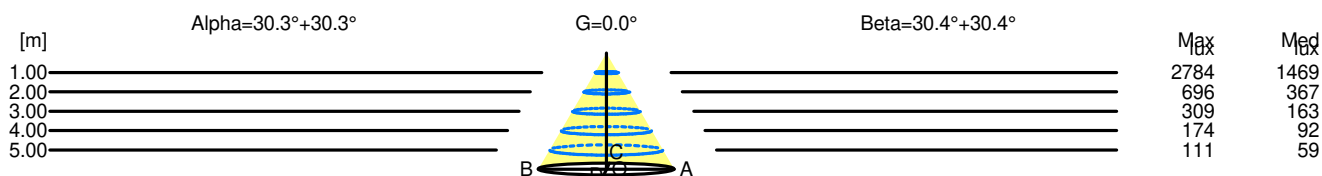

H[m]	D[m]	Max lux	Med lux	Alpha=30.3°+30.3°	G=0.0
1.00	1.17	2784	1469		
2.00	2.34	696	367		
3.00	3.51	309	163		
4.00	4.68	174	92		
5.00	5.85	111	59		

H[m]	D[m]	Max lux	Med lux	Beta=30.4°+30.4°	G=0.0
1.00	1.17	2784	1469		
2.00	2.35	696	367		
3.00	3.52	309	163		
4.00	4.69	174	92		
5.00	5.86	111	59		