


Luminaire

Code KZ31004
 Name kata metron pst spot 1x55 Dali 930 SP nr
Measurement.
 Code FTS2400334.
 Name kata metron pst spot 1x55 Dali 930 SP nr

Luminaire Flux	1805 lm	Luminaire Power	22.0 W	Efficacy	82.045 lm/W	Efficiency	100.00%
Source Flux	1805 lm	Maximum value	7350.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	55 mm 48 mm	Width Height	55 mm 0 mm	Height	130 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001810 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000438 m2				
Coordinate system Date Measurement Distance	CG 20-06-2024 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 1805 lm				
LED Flux=2539lm LED Power=18W Eff=71% EfcLed=145lm/W EfcLum=82lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E. F UTE	99 100 100 100 100 --	D DIN 5040 B NBN	A60 BZ 1				


55mm x 55mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

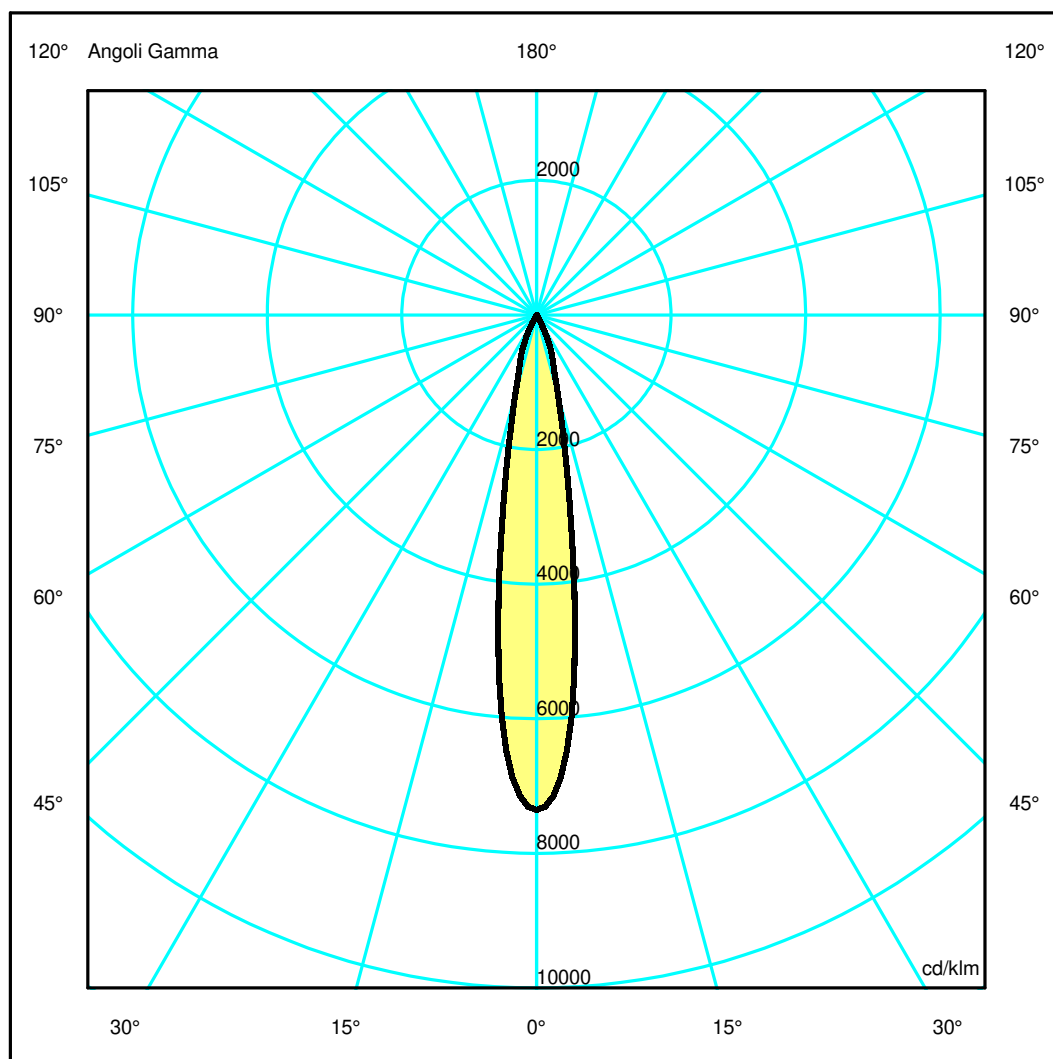

Luminaire

Code KZ31004
Name kata metron pst spot 1x55 Dali 930 SP nr

Measurment


Code FTS2400334.
Name kata metron pst spot 1x55 Dali 930 SP nr

Luminaire Flux	1805 lm	Luminaire Power	22.0 W	Efficacy	82.045 lm/W	Efficiency	100.00%
Source Flux	1805 lm	Maximum value	7350.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	55 mm 48 mm	Width Height	55 mm 0 mm	Height	130 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001810 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000438 m2				
Coordinate system Date Measurement Distance	CG 20-06-2024 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 1805 lm				
LED Flux=2539lm LED Power=18W Eff=71% EfcLed=145lm/W EfcLum=82lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E. F UTE	99 100 100 100 100 --	D DIN 5040 B NBN	A60 BZ 1				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.15	0.30	0.45	0.60	0.75	OC	0.15	0.30	0.45	0.60	0.75
OB	0.15	0.30	0.45	0.60	0.75	OD	0.15	0.30	0.45	0.60	0.75

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	13268.51	10779.04	2216.72	641.74	20.14	7.64	3.72	2.22	1.19	0.47
OB	13268.51	10779.04	2216.72	641.74	20.14	7.64	3.72	2.22	1.19	0.47
OC	13268.51	10779.04	2216.72	641.74	20.14	7.64	3.72	2.22	1.19	0.47
OD	13268.51	10779.04	2216.72	641.74	20.14	7.64	3.72	2.22	1.19	0.47

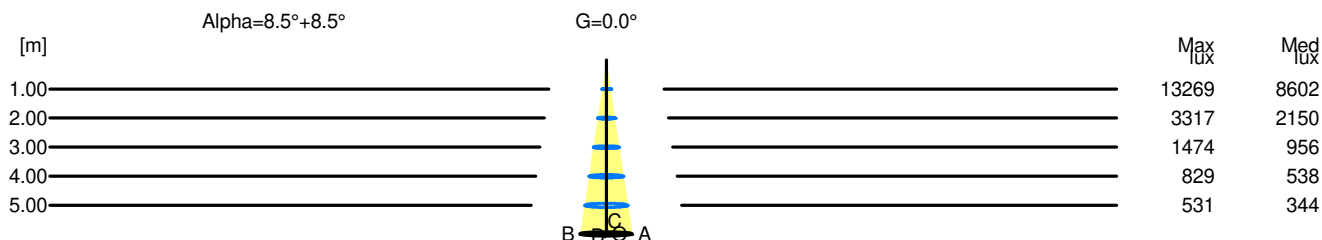

H[m]	D[m]	Max lux	Med lux	Alpha=8.5°+8.5°	G=0.0
1.00	0.30	13269	8602		
2.00	0.60	3317	2150		
3.00	0.90	1474	956		
4.00	1.20	829	538		
5.00	1.50	531	344		