


Luminaire

Code KZ31004+AP91200
 Name kata metron pst spot 1x55 Dali 930 SP nr + Lens for Elliptical emission


Measurement

Code FTS2400340.
 Name kata metron pst spot 1x55 Dali 930 SP nr + Lens for Elliptical emission

Luminaire Flux	1148 lm	Luminaire Power	22.0 W	Efficacy	52.182 lm/W	Efficiency	100.00%
Source Flux	1148 lm	Maximum value	3966.90 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	55 mm 48 mm	Width Height	55 mm 0 mm	Height	130 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.001810 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000438 m2	
Coordinate system Date Measurement Distance		CG 20-06-2024 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Double Symmetrical 180 1148 lm	
LED Flux=2539lm LED Power=18W Eff=45% EfcLed=145lm/W EfcLum=52lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E. F UTE	94 98 99 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

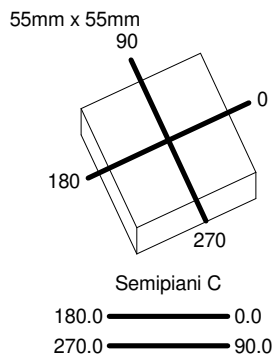

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

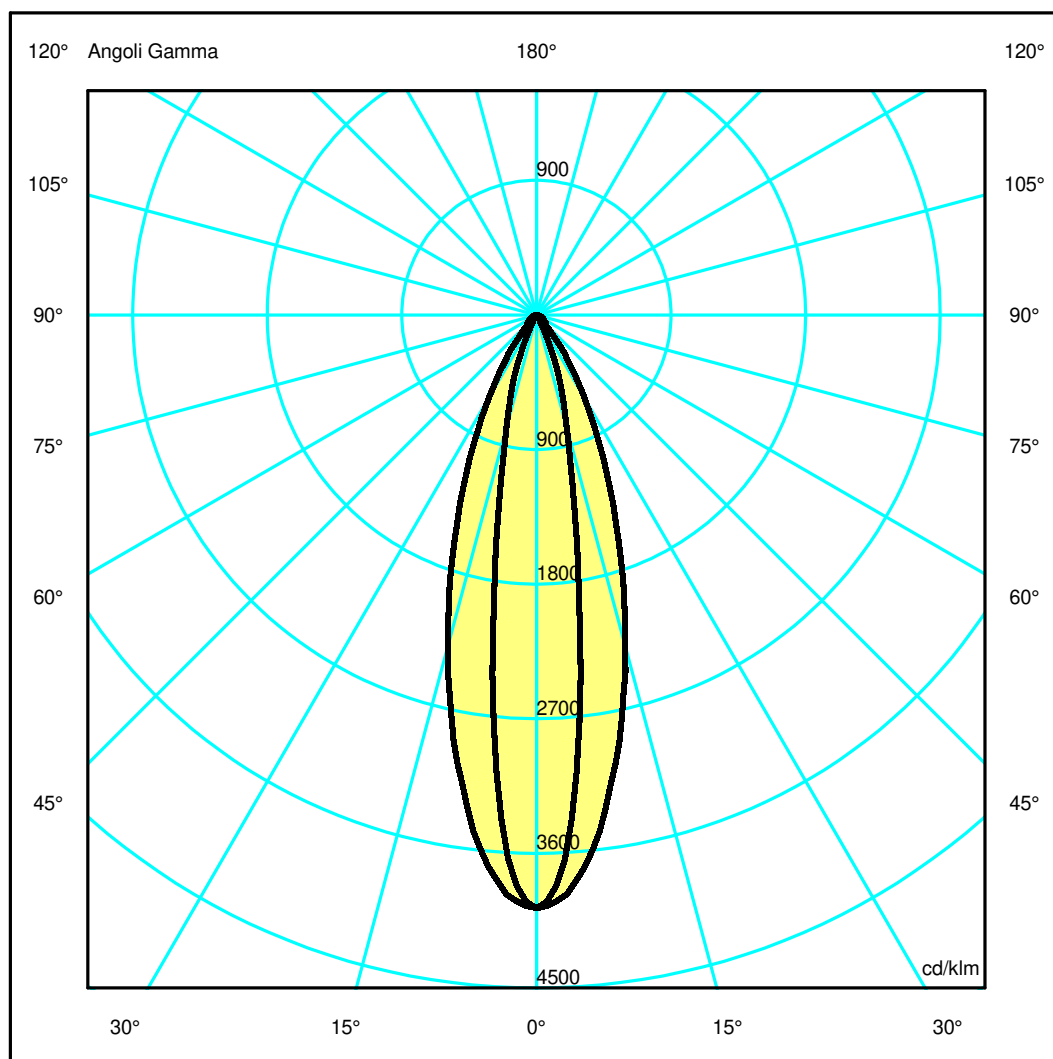

Luminaire

Code KZ31004+AP91200
 Name kata metron pst spot 1x55 Dali 930 SP nr + Lens for Elliptical emission

Measurement

Code FTS2400340.
 Name kata metron pst spot 1x55 Dali 930 SP nr + Lens for Elliptical emission

Luminaire Flux	1148 lm	Luminaire Power	22.0 W	Efficacy	52.182 lm/W	Efficiency	100.00%
Source Flux	1148 lm	Maximum value	3966.90 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	55 mm 48 mm	Width Height	55 mm 0 mm	Height	130 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001810 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000438 m2				
Coordinate system Date Measurement Distance	CG 20-06-2024 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Double Symmetrical 180 1148 lm				


LED Flux=2539lm LED Power=18W Eff=45% EfcLed=145lm/W EfcLum=52lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h

C.I.E.	94 98 99 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.15	0.29	0.44	0.59	0.73	OC	0.31	0.62	0.93	1.24	1.55
OB	0.15	0.29	0.44	0.59	0.73	OD	0.31	0.62	0.93	1.24	1.55

		Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85	
OA	4554.00	3528.15	889.93	161.22	27.53	14.60	8.35	5.83	4.70	1.36	
OB	4554.00	3528.15	889.93	161.22	27.53	14.60	8.35	5.83	4.70	1.36	
OC	4554.00	4249.47	2622.37	1214.48	395.28	100.39	71.49	45.89	30.48	8.41	
OD	4554.00	4249.47	2622.37	1214.48	395.28	100.39	71.49	45.89	30.48	8.41	

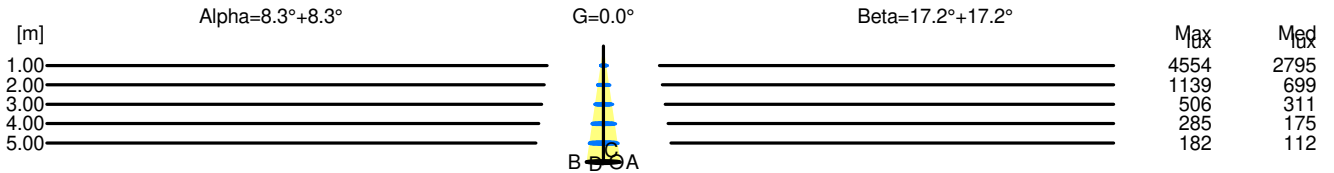

H[m]	D[m]	Max lux	Med lux	Alpha=8.3°+8.3°	G=0.0
1.00	0.29	4554	2795		
2.00	0.59	1139	699		
3.00	0.88	506	311		
4.00	1.17	285	175		
5.00	1.46	182	112		

H[m]	D[m]	Max lux	Med lux	Beta=17.2°+17.2°	G=0.0
1.00	0.62	4554	2795		
2.00	1.24	1139	699		
3.00	1.85	506	311		
4.00	2.47	285	175		
5.00	3.09	182	112		