


## Luminaire

Code KZ40104  
 Name kata metron pst pen 1x55 Dali 927 FL nr  
**Measurement.**  
 Code FTS2400323.  
 Name kata metron pst pen 1x55 Dali 927 FL nr

Luminaire Flux	1748 lm	Luminaire Power	22.0 W	Efficacy	79.455 lm/W	Efficiency	100.00%
Source Flux	1748 lm	Maximum value	5145.51 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	55 mm 48 mm	Width Height	55 mm 0 mm	Height	130 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001810 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000438 m2				
Coordinate system Date Measurement Distance	CG 20-06-2024 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 1748 lm				
LED Flux=2404lm LED Power=18W Eff=73% EfcLed=137lm/W EfcLum=79lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E. F UTE	99 100 100 100 100 --	D DIN 5040 B NBN	A60 BZ 1				


55mm x 55mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

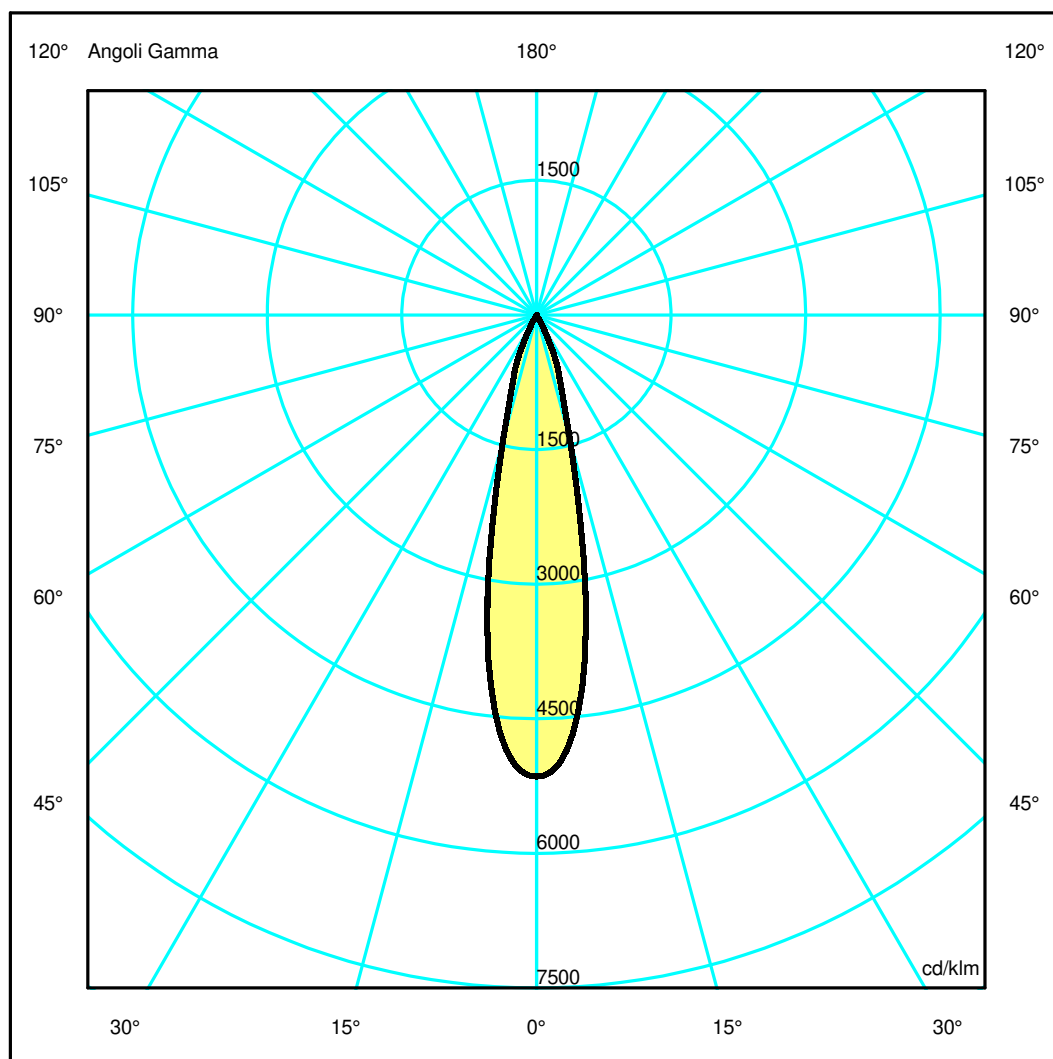

## Luminaire


Code KZ40104  
 Name kata metron pst pen 1x55 Dali 927 FL nr  
**Measur.**  
 Code FTS2400323.  
 Name kata metron pst pen 1x55 Dali 927 FL nr

Luminaire Flux	1748 lm	Luminaire Power	22.0 W	Efficacy	79.455 lm/W	Efficiency	100.00%
Source Flux	1748 lm	Maximum value	5145.51 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	55 mm 48 mm	Width Height	55 mm 0 mm	Height	130 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001810 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000438 m2				
Coordinate system Date Measurement Distance	CG 20-06-2024 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 1748 lm				
LED Flux=2404lm LED Power=18W Eff=73% EfcLed=137lm/W EfcLum=79lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E. F UTE	99 100 100 100 100 --	D DIN 5040 B NBN	A60 BZ 1				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.20	0.41	0.61	0.81	1.01	OC	0.20	0.41	0.61	0.81	1.01
OB	0.20	0.41	0.61	0.81	1.01	OD	0.20	0.41	0.61	0.81	1.01

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	8994.34	8175.20	2528.39	638.91	17.66	6.42	3.13	1.88	1.05	0.40
OB	8994.34	8175.20	2528.39	638.91	17.66	6.42	3.13	1.88	1.05	0.40
OC	8994.34	8175.20	2528.39	638.91	17.66	6.42	3.13	1.88	1.05	0.40
OD	8994.34	8175.20	2528.39	638.91	17.66	6.42	3.13	1.88	1.05	0.40

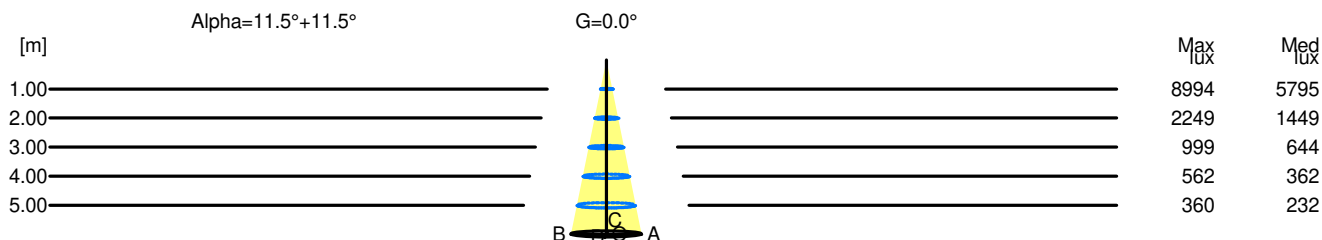

H[m]	D[m]	Max lux	Med lux	Alpha=11.5°+11.5°	G=0.0
1.00	0.41	8994	5795		
2.00	0.81	2249	1449		
3.00	1.22	999	644		
4.00	1.62	562	362		
5.00	2.03	360	232		