

Luminaire

Code KZ51204+AP90300
 Name kata metron pst spt 2x40 Dali 930 WF nro + Soft Filter

Measurement

Code FTS2400447.
 Name kata metron pst spt 2x40 Dali 930 WF nro + Soft Filter

Luminaire Flux	402 lm	Luminaire Power	9.5 W	Efficacy	42.316 lm/W	Efficiency	100.00%
Source Flux	402 lm	Maximum value	3008.02 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	40 mm 33 mm	Width Height	40 mm 0 mm	Height	103 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.000855 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000207 m2				
Coordinate system Date Measurement Distance	CG 21-06-2024 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 402 lm				
LED Flux=867lm LED Power=8W Eff=46% EfcLed=110lm/W EfcLum=42lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(9k)=50000h							
C.I.E. F UTE	96 99 100 100 100 1.00 A	D DIN 5040 B NBN	A60 BZ 1				


40mm x 40mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR100.00 %
 RN 0.00 %

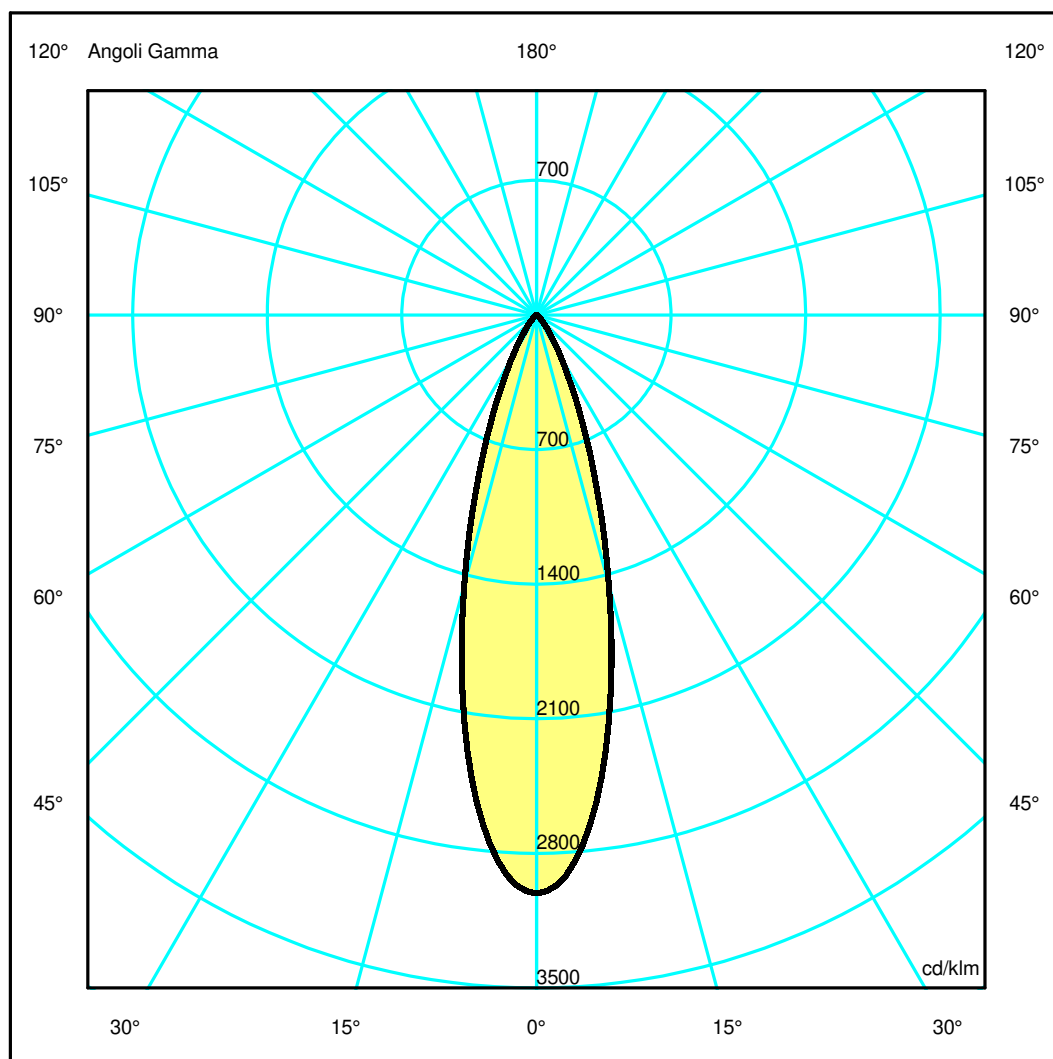

Luminaire

Code KZ51204+AP90300
 Name kata metron pst spt 2x40 Dali 930 WF nro + Soft Filter

Measurerm.


Code FTS2400447.
 Name kata metron pst spt 2x40 Dali 930 WF nro + Soft Filter

Luminaire Flux	402 lm	Luminaire Power	9.5 W	Efficacy	42.316 lm/W	Efficiency	100.00%
Source Flux	402 lm	Maximum value	3008.02 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area		Length Diam.	40 mm 33 mm	Width Height	40 mm 0 mm	Height	103 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.000855 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.000207 m2	
Coordinate system Date Measurement Distance		CG 21-06-2024 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 180 402 lm	
LED Flux=867lm LED Power=8W Eff=46% EfcLed=110lm/W EfcLum=42lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(9k)=50000h							
C.I.E. F UTE	96 99 100 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.26	0.52	0.78	1.04	1.31	OC	0.26	0.52	0.78	1.04	1.31
OB	0.26	0.52	0.78	1.04	1.31	OD	0.26	0.52	0.78	1.04	1.31

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1209.22	1111.24	584.54	192.92	52.39	14.03	4.16	1.78	0.77	0.09
OB	1209.22	1111.24	584.54	192.92	52.39	14.03	4.16	1.78	0.77	0.09
OC	1209.22	1111.24	584.54	192.92	52.39	14.03	4.16	1.78	0.77	0.09
OD	1209.22	1111.24	584.54	192.92	52.39	14.03	4.16	1.78	0.77	0.09

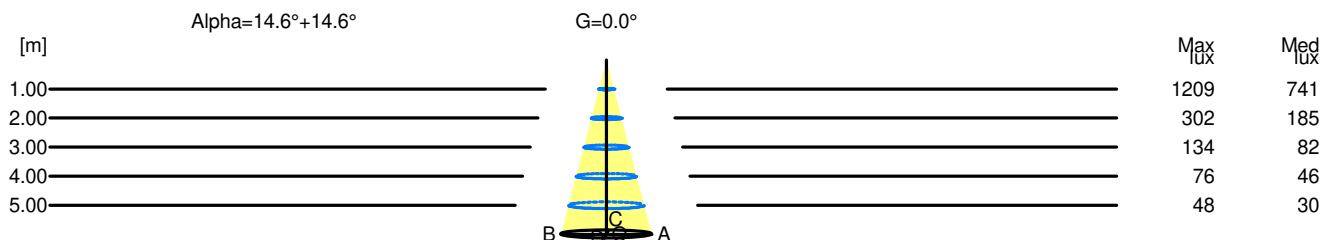

H[m]	D[m]	Max lux	Med lux	Alpha=14.6°+14.6°	G=0.0
1.00	0.52	1209	741		
2.00	1.04	302	185		
3.00	1.57	134	82		
4.00	2.09	76	46		
5.00	2.61	48	30		