


Luminaire

Code KZ60004+AP90200
 Name kata metron pst pnd 2x40 Dali 927 SP nro + Lens for Elliptical emission

Measurement

Code FTS2400436.
 Name kata metron pst pnd 2x40 Dali 927 SP nro + Lens for Elliptical emission

| | | | | | | | |
|---|-----------------------------|---|----------------|---|---------------|---|--------------------|
| Luminaire Flux | 376 lm | Luminaire Power | 9.5 W | Efficacy | 39.579 lm/W | Efficiency | 100.00% |
| Source Flux | 376 lm | Maximum value | 4963.04 cd/klm | Position | C=0.00 G=0.00 | CG | Double Symmetrical |
| Rectangular Luminaire Round Luminous Area | | Length Diam. | 40 mm 33 mm | Width Height | 40 mm 0 mm | Height | 103 mm |
| Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90° | | 0.000855 m2 0.000000 m2 0.000000 m2 | | Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76° | | 0.000000 m2 0.000000 m2 0.000207 m2 | |
| Coordinate system Date Measurement Distance | | CG 21-06-2024 0.00 | | Symmetry Type Maximum Gamma Angle Measurement Flux | | Double Symmetrical 180 376 lm | |
| LED Flux=698lm LED Power=8.4W Eff=54% EfcLed=83lm/W EfcLum=40lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h | | | | | | | |
| C.I.E. F UTE | 96 99 100 100 100 1.00 A | | | D DIN 5040 B NBN | A60 BZ 1 | | |

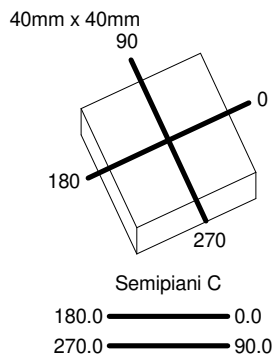

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

