

Luminaire

Code KZ81104+AP91300
 Name kata metron pst pnd 2x55 Dali 930 FL nro + Soft Filter

Measurement

Code FTS2400374.
 Name kata metron pst pnd 2x55 Dali 930 FL nro + Soft Filter

Luminaire Flux	1487 lm	Luminaire Power	20.0 W	Efficacy	74.350 lm/W	Efficiency	100.00%
Source Flux	1487 lm	Maximum value	3862.92 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	55 mm 48 mm	Width Height	55 mm 0 mm	Height	130 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001810 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000438 m2				
Coordinate system Date Measurement Distance	CG 20-06-2024 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 1487 lm				
LED Flux=2539lm LED Power=18W Eff=59% EfcLed=145lm/W EfcLum=74lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E. F UTE	98 99 100 100 100 --	D DIN 5040 B NBN	A60 BZ 1				


55mm x 55mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
 DLOR 100.00 %
 RN 0.00 %

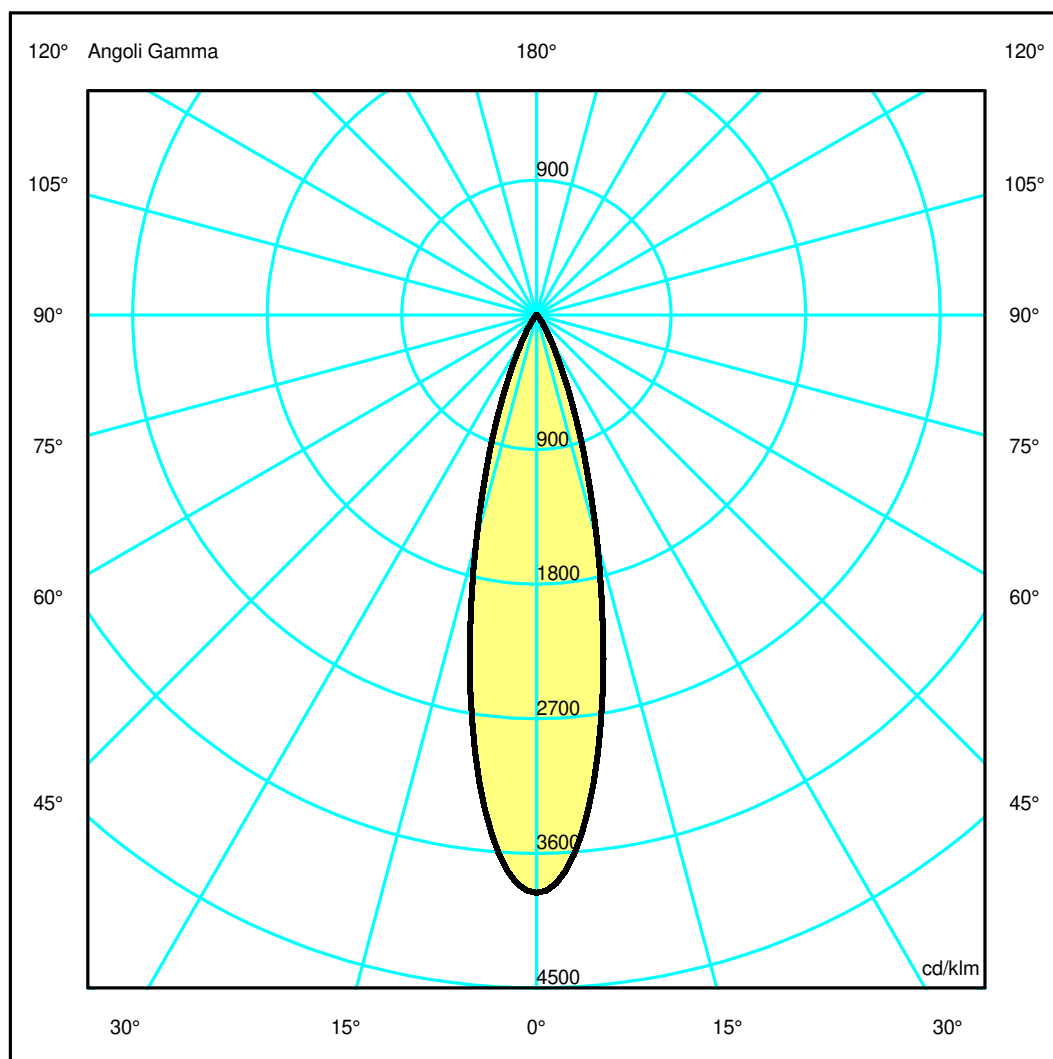

Luminaire

Code KZ81104+AP91300
Name kata metron pst pnd 2x55 Dali 930 FL nro + Soft Filter

Measurement


Code FTS2400374.
Name kata metron pst pnd 2x55 Dali 930 FL nro + Soft Filter

Luminaire Flux	1487 lm	Luminaire Power	20.0 W	Efficacy	74.350 lm/W	Efficiency	100.00%
Source Flux	1487 lm	Maximum value	3862.92 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire Round Luminous Area	Length Diam.	55 mm 48 mm	Width Height	55 mm 0 mm	Height	130 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.001810 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000438 m2				
Coordinate system Date Measurement Distance	CG 20-06-2024 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux	Rotosymmetrical 180 1487 lm				
LED Flux=2539lm LED Power=18W Eff=59% EfcLed=145lm/W EfcLum=74lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E. F UTE	98 99 100 100 100 --	D DIN 5040 B NBN	A60 BZ 1				

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.23	0.46	0.69	0.92	1.16	OC	0.23	0.46	0.69	0.92	1.16
OB	0.23	0.46	0.69	0.92	1.16	OD	0.23	0.46	0.69	0.92	1.16

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	5744.15	5170.13	2317.99	589.82	112.13	23.47	8.54	6.09	3.79	0.87
OB	5744.15	5170.13	2317.99	589.82	112.13	23.47	8.54	6.09	3.79	0.87
OC	5744.15	5170.13	2317.99	589.82	112.13	23.47	8.54	6.09	3.79	0.87
OD	5744.15	5170.13	2317.99	589.82	112.13	23.47	8.54	6.09	3.79	0.87

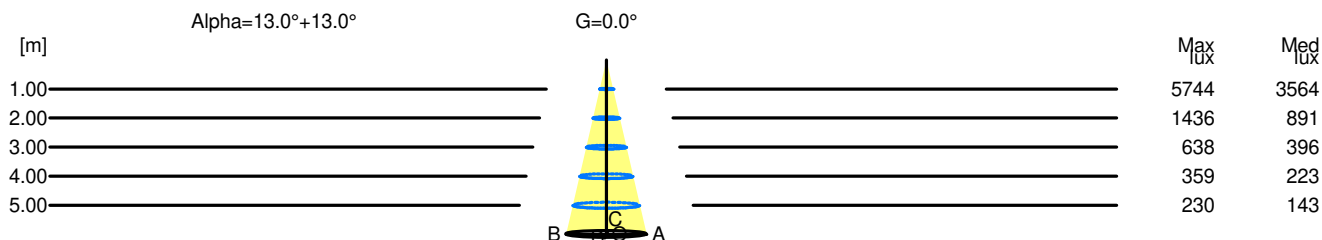

H[m]	D[m]	Max lux	Med lux	Alpha=13.0°+13.0°	G=0.0
1.00	0.46	5744	3564		
2.00	0.92	1436	891		
3.00	1.39	638	396		
4.00	1.85	359	223		
5.00	2.31	230	143		