

## Luminaire

Code M0569N81+M109700+M282100


Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA FLOOD + GRIGLIA FRANGILUCE

## Measurem.

Code FTS1503413

Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA FLOOD + GRIGLIA FRANGILUCE

Luminaire Flux	1243.38 lm	Luminaire Power	22.00 W	Efficacy	56.52 lm/W	Efficiency	100.00%
Lamps Flux	1243.38 lm	Maximum value	3575.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	130 mm 75 mm	Height Height	176 mm 50 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°	0.003750 m2		
Emitting area on Plane 0°	0.003750 m2			Emitting area on Plane 270°	0.003750 m2		
Emitting area on Plane 90°	0.003750 m2			Glare area at 76°	0.004707 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	08-10-2015			Maximum Gamma Angle	90		
Measurement Distance	0.00			Measurement Flux	1243.38 lm		
LED Flux=1943,3lm LED Power=17,5W Eff=64% EfcLed=111lm/W EfcLum=57lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E.	97 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

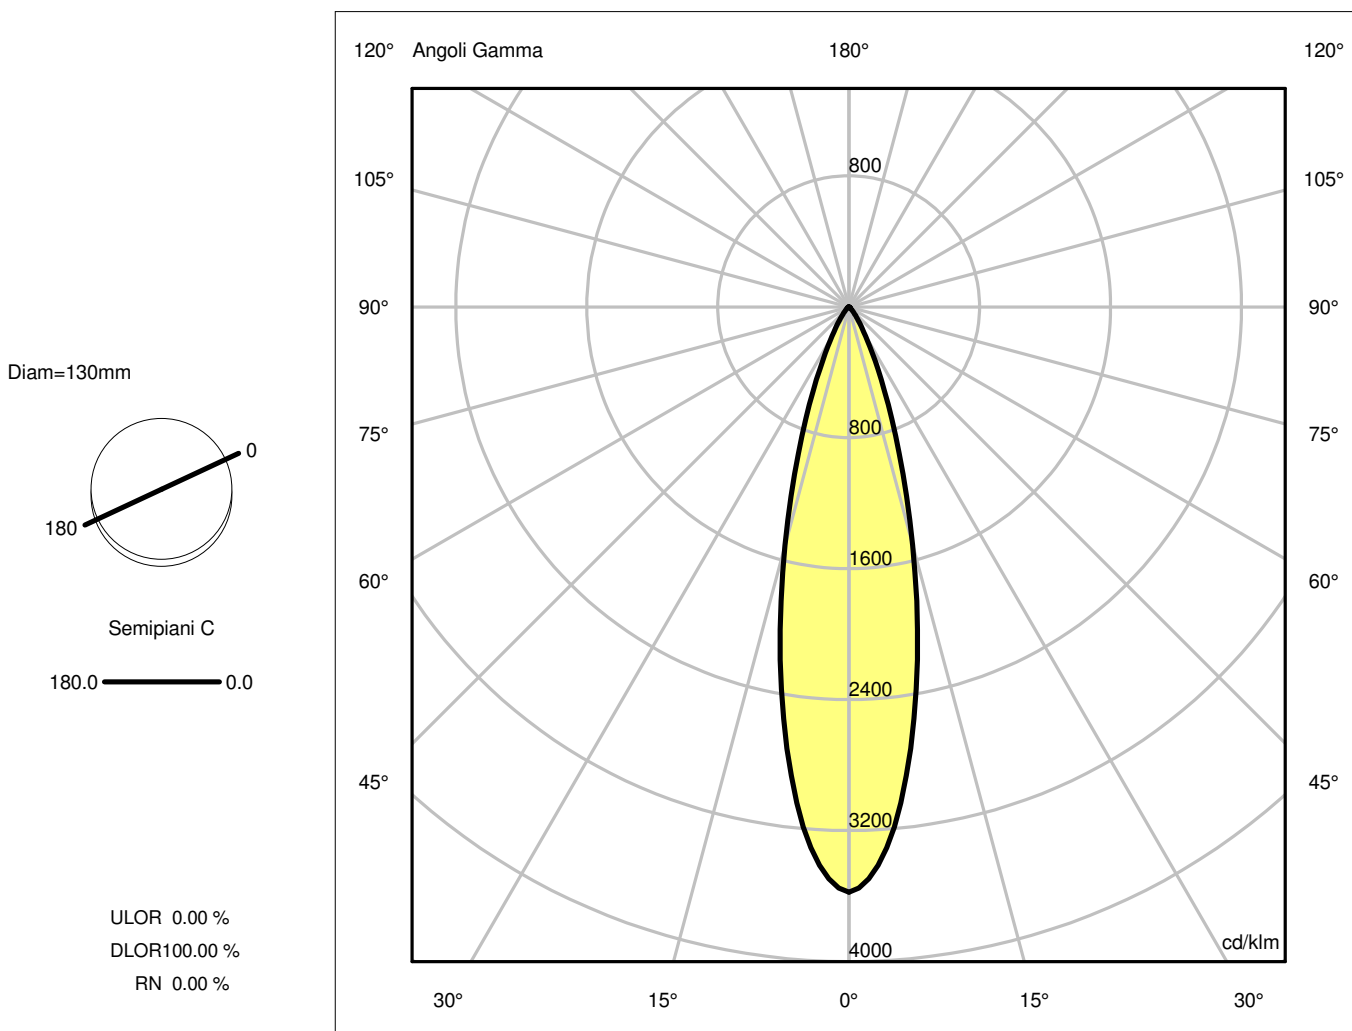

## Luminaire

Code M0569N81+M109700+M282100  
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA FLOOD + GRIGLIA FRANGILUCE

## Measurement

Code FTS1503413  
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 4000K DIMM DALI-SWITCHDIM + OTTICA FLOOD + GRIGLIA FRANGILUCE

Luminaire Flux	1243.38 lm	Luminaire Power	22.00 W	Efficacy	56.52 lm/W	Efficiency	100.00%
Lamps Flux	1243.38 lm	Maximum value	3575.14 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	130 mm	Height	176 mm		
Round Luminous Area		Diam.	75 mm	Height	50 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°	0.003750 m2		
Emitting area on Plane 0°	0.003750 m2			Emitting area on Plane 270°	0.003750 m2		
Emitting area on Plane 90°	0.003750 m2			Glare area at 76°	0.004707 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	08-10-2015			Maximum Gamma Angle	90		
Measurement Distance	0.00			Measurement Flux	1243.38 lm		


LED Flux=1943,3lm LED Power=17,5W Eff=64% EfcLed=111lm/W EfcLum=57lm/W Ra=90 SDCM=2 L70(6K)=36000h

C.I.E.	97 99 100 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.24	0.47	0.71	0.95	1.18	OC	0.24	0.47	0.71	0.95	1.18
OB	0.24	0.47	0.71	0.95	1.18	OD	0.24	0.47	0.71	0.95	1.18

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	4445.26	3965.10	1876.13	523.26	125.29	32.11	12.27	4.13	2.74	4.03
OB	4445.26	3965.10	1876.13	523.26	125.29	32.11	12.27	4.13	2.74	4.03
OC	4445.26	3965.10	1876.13	523.26	125.29	32.11	12.27	4.13	2.74	4.03
OD	4445.26	3965.10	1876.13	523.26	125.29	32.11	12.27	4.13	2.74	4.03

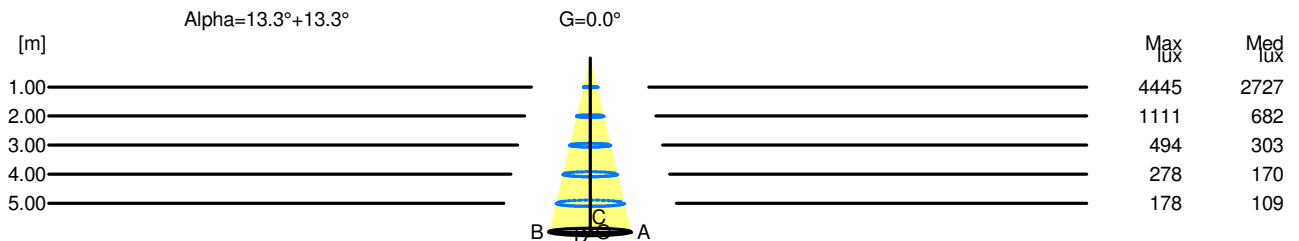

H[m]	D[m]	Max lux	Med lux	Alpha=13.3°+13.3°	G=0.0
1.00	0.47	4445	2727		
2.00	0.95	1111	682		
3.00	1.42	494	303		
4.00	1.89	278	170		
5.00	2.37	178	109		