


Luminaire

Code M0569W81+M109500
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA ULTRA NARROW

Measurem.

Code FTS1503279
 Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA ULTRA NARROW

Luminaire Flux	1445.94 lm	Luminaire Power	22.00 W	Efficacy	65.72 lm/W	Efficiency	100.00%
Lamps Flux	1445.94 lm	Maximum value	11702.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 130 mm Diam. 75 mm	Height	176 mm	Height	50 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.004418 m2 0.003750 m2 0.003750 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.003750 m2 0.003750 m2 0.004707 m2				
Coordinate system	CG	Symmetry Type	Maximum Gamma Angle	Measurement Flux	180	Rotosymmetrical	
Date	21-10-2015						
Measurement Distance	0.00						1445.94 lm
LED Flux=1811,5lm LED Power=17,5W Eff=80% EfcLed=104lm/W EfcLum=66lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E.	80 90 96 100 100	D DIN 5040	A60				
F UTE	1.00 B	B NBN	BZ 1				

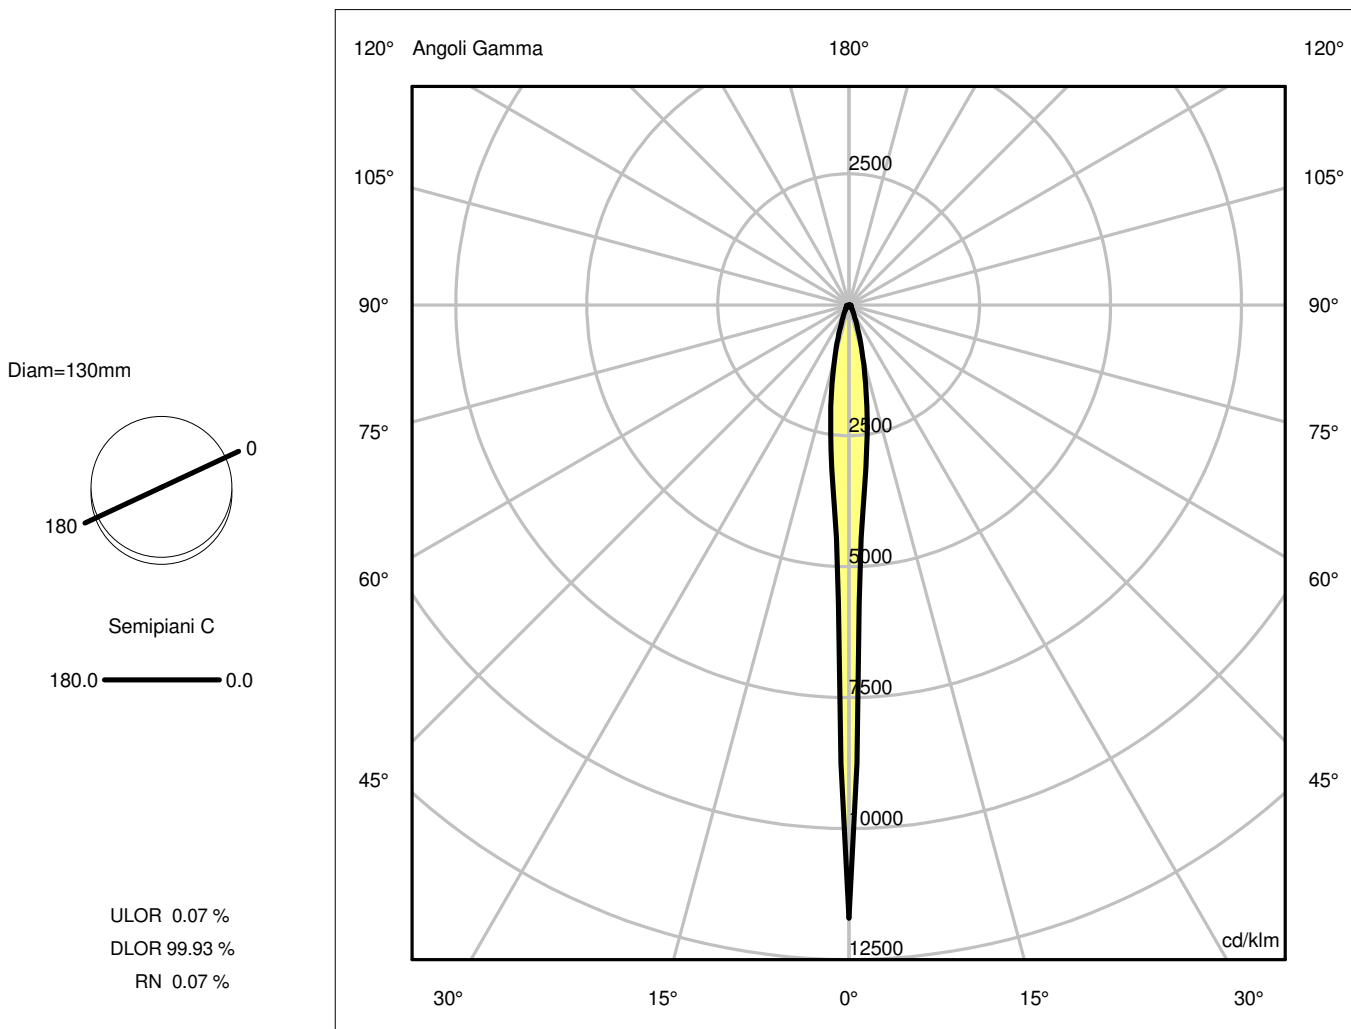

Luminaire

Code M0569W81+M109500

Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA ULTRA NARROW

Measurement

Code FTS1503279


Name CATA TIR SOFFITTO STABLE WHITE UNITA' OTTICA 3000K DIMM DALI-SWITCHDIM + OTTICA ULTRA NARROW

Luminaire Flux	1445.94 lm	Luminaire Power	22.00 W	Efficacy	65.72 lm/W	Efficiency	100.00%
Lamps Flux	1445.94 lm	Maximum value	11702.97 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	130 mm	Height	176 mm		
Round Luminous Area		Diam.	75 mm	Height	50 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°	0.003750 m2		
Emitting area on Plane 0°	0.003750 m2			Emitting area on Plane 270°	0.003750 m2		
Emitting area on Plane 90°	0.003750 m2			Glare area at 76°	0.004707 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	21-10-2015			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	1445.94 lm		
LED Flux=1811,5lm LED Power=17,5W Eff=80% EfcLed=104lm/W EfcLum=66lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E.	80 90 96 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.03	0.07	0.10	0.14	0.17	OC	0.03	0.07	0.10	0.14	0.17
OB	0.03	0.07	0.10	0.14	0.17	OD	0.03	0.07	0.10	0.14	0.17

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	16921.79	5044.69	1494.19	393.45	161.25	97.73	75.96	70.53	42.31	32.64
OB	16921.79	5044.69	1494.19	393.45	161.25	97.73	75.96	70.53	42.31	32.64
OC	16921.79	5044.69	1494.19	393.45	161.25	97.73	75.96	70.53	42.31	32.64
OD	16921.79	5044.69	1494.19	393.45	161.25	97.73	75.96	70.53	42.31	32.64

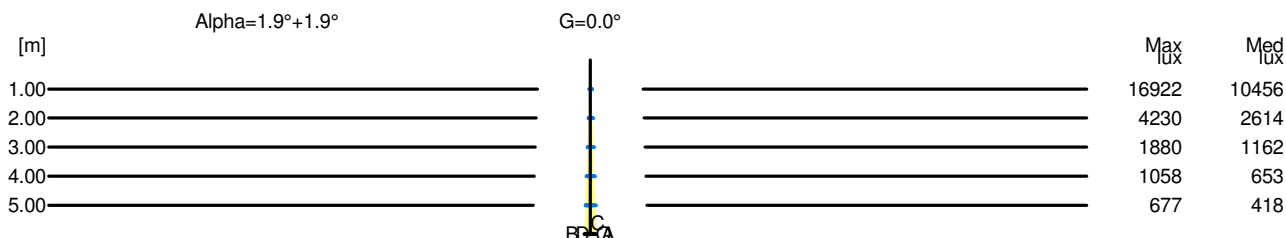

H[m]	D[m]	Max lux	Med lux	Alpha=1.9°+1.9°	G=0.0
1.00	0.07	16922	10456		
2.00	0.14	4230	2614		
3.00	0.20	1880	1162		
4.00	0.27	1058	653		
5.00	0.34	677	418		