

## Luminaire

Code M250341  
Name TAGORA 570 INCASSO LED DIMMERABILE DALI 4000K VERDE

## Measurement

Code FTS2200129  
Name TAGORA 570 INCASSO LED DIMMERABILE DALI 4000K VERDE

Luminaire Flux	3562 lm	Luminaire Power	54.0 W	Efficacy	65.957 lm/W	Efficiency	100.00%
Source Flux	3562 lm	Maximum value	420.43 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	570 mm	Height	195 mm		
Round Luminous Area		Diam.	475 mm	Height	0 mm		
Horizontal Luminous Area			0.177205 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.042870 m2
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3562 lm	

LED Flux=8850lm LED Power=50W Eff=40% EfcLed=178lm/W EfcLum=66lm/W CCT=4000K Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 55 88 99 100 100  
F UTE 1.00 D

D DIN 5040 A40  
B NBN BZ 3

Diam=570mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

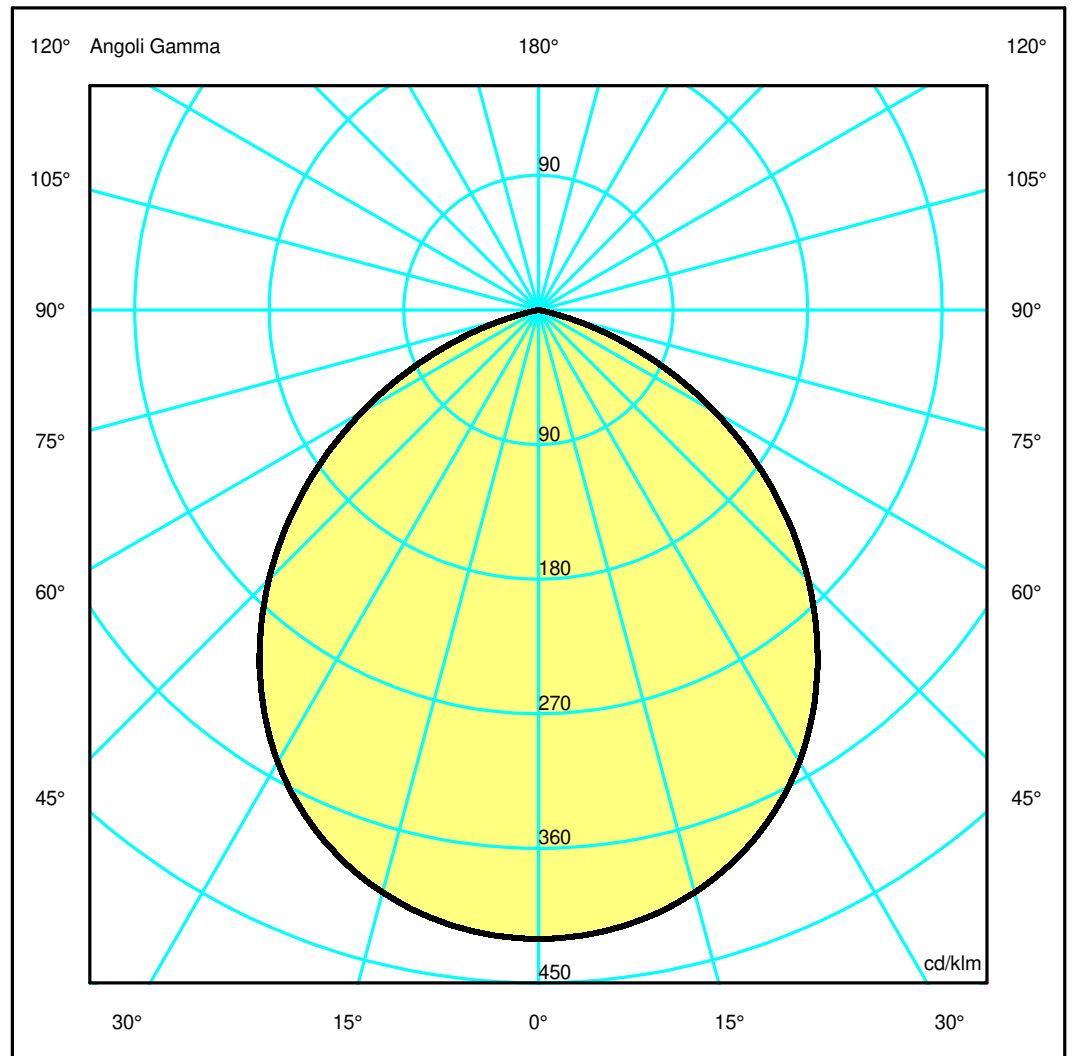

## Luminaire

Code M250341  
Name TAGORA 570 INCASSO LED DIMMERABILE DALI 4000K VERDE

## Measurerm.


Code FTS2200129  
Name TAGORA 570 INCASSO LED DIMMERABILE DALI 4000K VERDE

Luminaire Flux	3562 lm	Luminaire Power	54.0 W	Efficacy	65.957 lm/W	Efficiency	100.00%
Source Flux	3562 lm	Maximum value	420.43 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	570 mm	Height	195 mm		
Round Luminous Area		Diam.	475 mm	Height	0 mm		
Horizontal Luminous Area		0.177205 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.042870 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3562 lm	
LED Flux=8850lm LED Power=50W Eff=40% EfcLed=178lm/W EfcLum=66lm/W CCT=4000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	55 88 99 100 100			D DIN 5040	A40		
F UTE	1.00 D			B NBN	BZ 3		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.23	2.46	3.69	4.92	6.15	OC	1.23	2.46	3.69	4.92	6.15
OB	1.23	2.46	3.69	4.92	6.15	OD	1.23	2.46	3.69	4.92	6.15

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1497.43	1490.46	1435.76	1322.80	1144.98	908.52	631.91	339.29	73.64	4.40
OB	1497.43	1490.46	1435.76	1322.80	1144.98	908.52	631.91	339.29	73.64	4.40
OC	1497.43	1490.46	1435.76	1322.80	1144.98	908.52	631.91	339.29	73.64	4.40
OD	1497.43	1490.46	1435.76	1322.80	1144.98	908.52	631.91	339.29	73.64	4.40

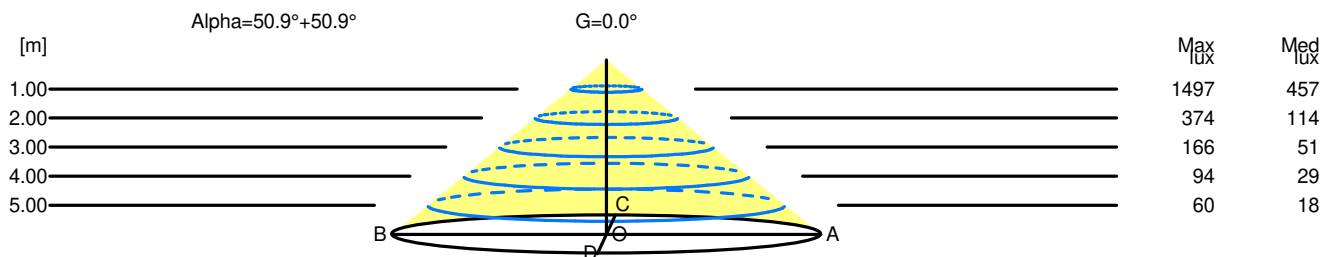

H[m]	D[m]	Max lux	Med lux	Alpha=50.9°+50.9°	G=0.0
1.00	2.46	1497	457		
2.00	4.92	374	114		
3.00	7.38	166	51		
4.00	9.84	94	29		
5.00	12.30	60	18		